

Specification for Models: H-852, H-853, H-852-A, H-853-A, H-852-C & H-853-C  
(Friendly™ Showers - Not ADA compliant)

Warm Rain® models H-852 (seat on left) and H-853 (seat on right) Friendly™ shower fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass includes a minimum content of 18 % fiberglass. This unit is a one piece shower with a built in seat and a corner shelf.


The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content of no less than 18%. The base is an integral part of the unit.

The unit will measure 48" x 36" x 79" and has a 4.5" dam with a textured bottom floor. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

These units are reinforced for the future installation of grab bars. The reinforcement is shown in the diagram below.

Antibacterial additive is an option for this unit.

These Warm Rain® Friendly™ showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the National Association of Home Builders (NAHB). These Friendly™ units comply with the Fair Housing Act for adaptability.

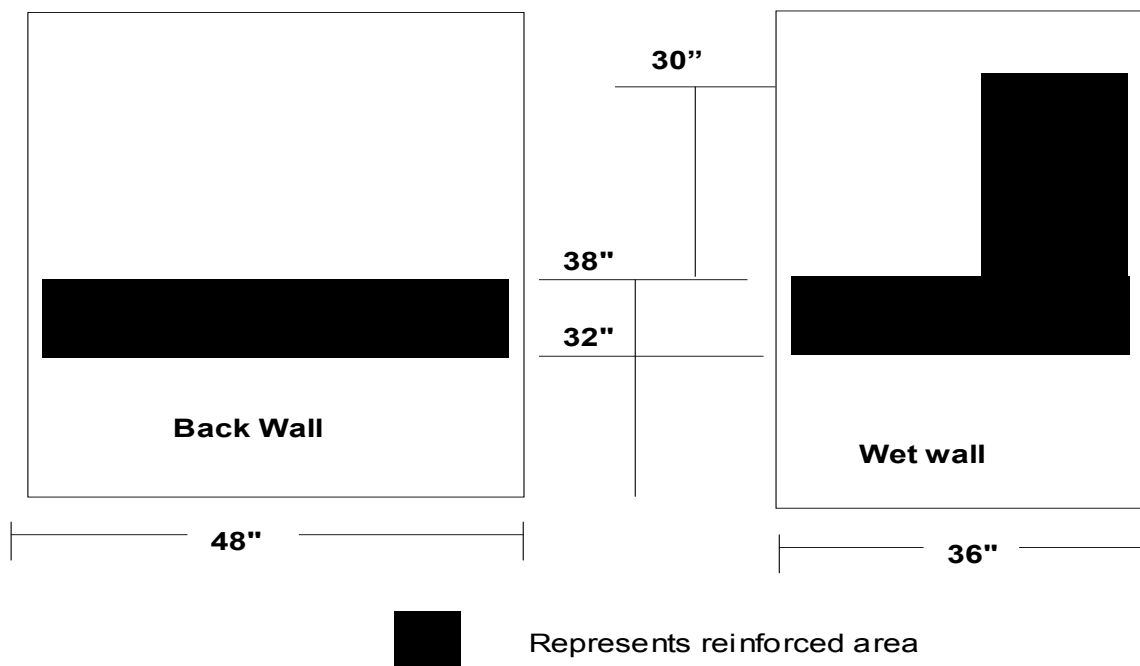

Warm Rain® Corporation, P.O. Box 600 Hancock, MI 49930  
Voice: 906-482-3750 Fax: 906-482-2585 E-mail: [tedk@warmrain.com](mailto:tedk@warmrain.com) Website: [www.warmrain.com](http://www.warmrain.com)

Specification for Models: H-852, H-853, H-852-A, H-853-A, H-852-C & H-853-C  
(Friendly™ Showers - Not ADA compliant)

H-852-A (seat on left) & H-853-A (seat on right)

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1-24" vertical & 1-12" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1-24" vertical grab bar will be placed 38.5" above the floor and half way between the front of the unit and the middle of the wet wall. 1-12" grab bar will be placed on the back wall 34.5" above the floor.

H-852-C (seat on left) & H-853-C (seat on right)

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1-24" vertical & 1-12" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1-24" vertical grab bar will be placed 38.5" above the floor half way between the front of the unit and the middle of the wet wall. 1-12" grab bar will be placed on the back wall 34.5" above the floor. 1-Symmons Temptrol Valve and Kit model # S-25-300-B30-V-X-2000 will include a Temptrol 2000 pressure balance valve, hand held shower with a 30" bar, and a vacuum breaker. Also, 1-Seachrome 5' curtain rod with hangers will be included with the unit

