# pate (always in stock) equipment supports

### standard construction

18 ga. galvanized steel, unitized construction with integral base plate, continuous welded corner seams, pressure treated wood nailer, counterflashing with screws. Internally re-inforced to conform with **pate** load bearing factors.


the pate company	1

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com


o.o. no.			
customer			
oroject			
oroject ocation			
architect	•		
engineer			
engineer		•	

#### pate equipment supports

es-1



non-insulated decks



	equipment support requirements							
quantity	style	nailer length	nailer width	* overall height	tag			
	ES-1	2'-0"	2 x 4	12"				
	ES-1	3'-0"	2 x 4	12"				
	ES-1	4'-0"	2 x 4	12"				
	ES-1	6'-0"	2 x 4	12"				

# pate (always in stock) equipment supports

### standard construction

18 ga. galvanized steel, unitized construction with integral base plate, continuous welded corner seams, pressure treated wood nailer, counterflashing with screws. Internally re-inforced to conform with **pate** load bearing factors.


the pate company

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com


o.o. no.			
customer			
attn			
oroject ocation			
ocation			
architect			
engineer			

#### pate equipment supports

es-2



decks with lightweight fill or tapered insulation



equipment support requirements										
quantity	style	nailer	nailer	overall	quantity	style	nailer	overall	nailer	
		length	width	height			length	height	width	
	ES-2	2'-0"	2 x 4 & 2 x 6	12"		ES-2	2'-0"	18"	2 x 4	
	ES-2	3'-0"	2 x 4 & 2 x 6	12"		ES-2	3'-0"	18"	2 x 4	
	ES-2	4'-0"	2 x 4 & 2 x 6	12"		ES-2	4'-0"	18"	2 x 4	
	ES-2	5'-0"	2 x 4 & 2 x 6	12"						
	ES-2	6'-0"	2 x 4 & 2 x 6	12"						
	ES-2	8'-0"	2 x 4 & 2 x 6	12"						
	ES-2	10'-0"	2 x 4 & 2 x 6	12"						

### pc-2 STOCK

the pacesetter in quality prefab roof products

### pate (always in stock) roof curbs

### standard construction

Heavy ga. galvanized steel, unitized, full mitered corners, all seams welded, 1 1/2" thick rigid fiberglass insulation, pressure treated wood nailer strip. All curbs are internally reinforced in larger dimensions.


the pate company


245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

o.o. no.			
customer			
oroject			
oroject ocation			
architect			
engineer			

### pate curbs

pc-2





decks with lightweight fill or tapered insulation

roof curb requirements							
quantity	style	dimer	nsions	height	tag		
		O.D.	I.D.				
	PC-2	15-1/2" x 15-1/2"	12-1/2" x 12-1/2"	12"			
	PC-2	17-1/2" x 17-1/2"	14-1/2" x 14-1/2"	12"			
	PC-2	20-1/2" x 20-1/2"	17-1/2" x 17-1/2"	12"			
	PC-2	24-1/2" x 24-1/2"	21-1/2" x 21-1/2"	12"			
	PC-2	28-1/2" x 28-1/2"	25-1/2" x 25-1/2"	12"			
	PC-2	32-1/2" x 32-1/2"	29-1/2" x 29-1/2"	12"			
	PC-2	38-1/2" x 38-1/2"	35-1/2" x 35-1/2"	12"			

### pc-2-dhp STOCK

### pate (always in stock) roof curbs with damper tray

#### standard construction

Heavy ga. galvanized steel, unitized construction with full mitered corners all seams welded, 1 1/2" thick rigid fiberglass insulation, pressure treated wood nailer strip. All curbs are internally reinforced in larger size dimensions.

the	pate company

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

### pate curbs

p.o. no.

customer


attn


project

location

architect engineer

pc-2-dhp





	roof curb requirements								
quantity	style	dimer	nsions	height	d.h.p	d.t.o.	tag		
		O.D.	I. D.			square			
	PC-2	16 1/2" x 16 1/2"	13-1/2" x 13-1/2"	12"	1 7/8"	9 3/4"			
	PC-2	18 1/2" x 18 1/2"	15-1/2" x 15-1/2"	12"	1 7/8"	11 3/4"			
	PC-2	20 1/2" x 20 1/2"	17-1/2" x 17-1/2"	12"	1 7/8"	13 3/4"			
	PC-2	22 1/2" x 22 1/2"	19-1/2" x 19-1/2"	12"	1 7/8"	15 3/4"			
	PC-2	26 1/2" x 26 1/2"	23-1/2" x 23-1/2"	12"	1 7/8"	19 3/4"			
	PC-2	28 1/2" x 28 1/2"	25-1/2" x 25-1/2"	12"	1 7/8"	21 3/4"			
	PC-2	30 1/2" x 30 1/2"	27-1/2" x 27-1/2"	12"	1 7/8"	23 3/4"			
	PC-2	34 1/2" x 34 1/2"	31-1/2" x 31-1/2"	12"	1 7/8"	27 3/4"			
	PC-2	40 1/2" x 40 1/2"	37-1/2" x 37-1/2"	12"	1 7/8"	33 3/4"			

# pate (always in stock) pipe curb assemblies


### standard construction

pipe curb assembly shall consist of heavy ga. galvanized steel roof curb, unitized construction, with integral base plate, 1 1/2" insulation and 2 x 2 treated wood nailer. Unit shall be furnished with acrylic clad thermoplastic cover, fastening screws, graduated step boots with stainless steel clamps.

the pate company

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

o.o. no.			
customer			
oroject			
oroject ocation			
			_
architect			_
engineer			

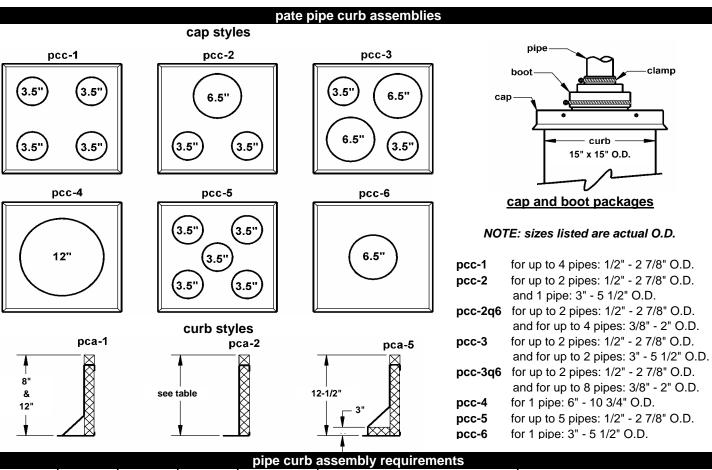

		-			<u> </u>	pcc-6	for 1 pipe: 3" - 5 1/2"	O.D.
				pipe curb	assembly require	ments		
quantity	curb style	height	raised cant	cap & boot pkg.	b-3	•	b-c	<b>16</b>
	PCA-2 PCA-2 PCA-2 PCA-2	12" 14" 16" 18"	n/a n/a n/a n/a n/a	pcc- all in	3 1/2" I	ated step boot for		4 module graduated step 6 1/2" boot for 3/8" - 2" actual O.D. pipe
	PCA-2	24"	n/a		b-6	•	b-1	2
	PCA-1 PCA-1	8" 12"	n/a n/a	stock	6 1/2" 3" - 5"	ated step boot for		1 module graduated step 12" boot for 6" - 10 3/4" actual O.D. pipe
	PCA-5	12-1/2"	3"					

### pha-2 STOCK

the pacesetter in quality prefab roof products

# pate (always in stock) pipe hood assembly


### standard construction

Heavy ga. aluminum construction. With removable top cover, faceplate and 3 sided body provide easy access to the hood interior. Separate fully welded and insulated aluminum mounting base furnished to isolate hood from galvanized curb. Field insulation of hood interior and caulking of all exposed joints after installation of piping is recommended.

the pate	company

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

o.o. no.			
customer			
oroject ocation			
ocation			
architect			
engineer			

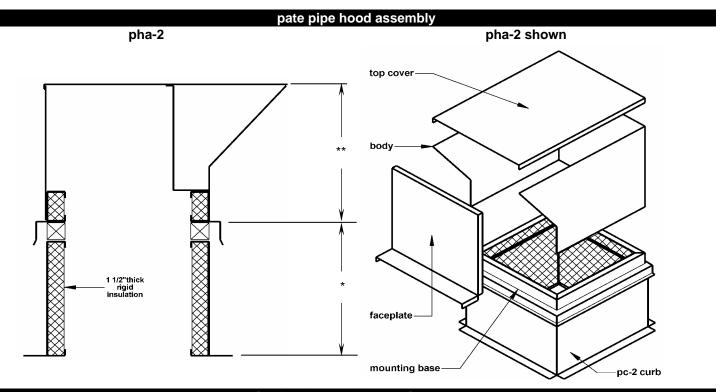

			pipe hood assem	ıbly requi	rements	
quantity	style	dime	nsions	* curb	**hood	tag
		O.D.	I.D.	height	height	
1 1 1 1 1	PHA PHA PHA PHA PHA	15" x 15" 15" x 15" 15" x 15" 15" x 15" 15" x 15" 15" x 15"	12" x 12" 12" x 12" 12" x 12" 12" x 12" 12" x 12" 12" x 12"	12" 14" 15" 16" 18" 24"	12" 12" 12" 12" 12" 12"	

# pate (always in stock) pipe seal assemblies

### standard construction


One piece spun aluminum base with full five inch sloped roof surface flange, graduated step pvc boot and adjustable stainless steel clamps.



245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com


p.o. no.		
customer		
•		
project		
project location		
•		
architect		
engineer		

### pate pipe seal assemblies

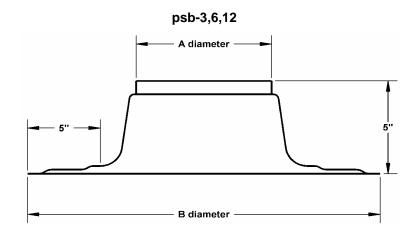

pipe seal base	A dia.	B dia.
psb-3	3 1/2"	16"
psb-6	6 1/2"	20"
psb-12	12"	23"

### pps-3 assembly shown



#### pipe seal base and boot packages

NOTE: sizes listed are actual O.D.

**pps-3** 1 pipe: 1/2" - 2 7/8" O.D.

**pps-6** 1 pipe: 3" - 5 1/2" O.D.

**pps-6q6** for up to 4 pipes: 3/8" - 2" O.D.

**pps-12** 1 pipe: 6" - 10 3/4" O.D.

pipe seal assembly requirements							
quantity	pipe seal		components		b-3	b-q6	
	assembly	base	boot	clamps	1 module graduated step	4 module graduated step	
	pps-3	psb-3	b-3	2 clamps	3 1/2" boot for 1/2" - 2 7/8" actual O.D. pipe	6 1/2" boot for 3/8" - 2" actual O.D. pipe	
	pps-6	psb-6	b-6	2 clamps			
					b-6	b-12	
	pps-6q6	psb-6	b-q6	5 clamps	1 module	1 module	
	pps-12	psb-3	b-12	2 clamps	graduated step 6 1/2" boot for 3" - 5" actual O.D. pipe	graduated step 12" boot for 6" - 10 3/4" actual O.D. pipe	

### dektites<sub>®</sub> STOCK

the pacesetter in quality prefab roof products

### standard construction

For use on metal roof panels, aluminum, copper, plastic, fiberglass, lead and wood. Flexible aluminum base conforms to any panel. -30 to +250 F temperature range. One piece construction will not crack or break. Pleated EPDM cone adjusts to any roof pitch. Pipe diameter markings are clearly indicated on the flexible cone in inches and millimeters for accurate fitting. Applications include plumbing, heating and air conditioning pipes and vents, electrical service entrances, etc.. Effectively flashes and isolates the pipe from building movement created by expansion, contraction and vibration. Designed for pipe diameters from 1/4" through 24".

	the	pate	e co	om	pany

245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

customer			
oroject			
architect engineer			

#### dektites standard



			dek	tite requirement	s	
	1			•		
quantity	dektite size	pipe diameter range	base diameter	fasteners required	sealant required	tag
		st	andard - gray - 250	degrees F		
	mini	1/8" - 1"	3 5/8"	5	1/12 tube	
	#1	1/4" - 2"	4 3/4"	6	1/10 tube	
	#2	1 3/4" - 3"	6 1/4"	8	1/7 tube	
	#3	1/4" - 4"	7 3/4"	10	1/6 tube	
	#4	3" - 6"	9 1/4"	12	1/5 tube	
	#5	4" - 7"	10 3/4"	14	1/4 tube	
	#6	5" - 9"	13 1/2"	16	1/4 tube	
	#7	6" - 11"	14 1/2"	18	1/3 tube	
	#8	7" - 13"	16 1/2"	22	1/3 tube	
	#9	10" - 18"	25 3/8"	32	1/2 tube	