

Features


- KOHLER cast iron
- Single compartment
- Tile-in
- Acid-resistant enamel finish
- 48" (1219 mm) x 25" (635 mm)

TILE-IN UTILITY SINK K-6606

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2

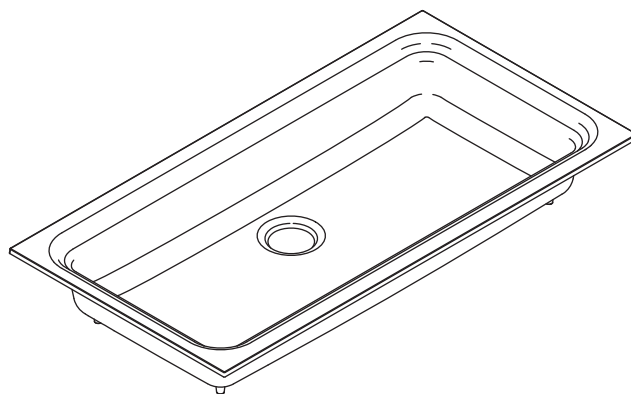

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- ST: Stainless Steel
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-6606	Tile-in utility sink	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-8801	Duostrainer® sink strainer (for countertop installation)	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-8807	Sink strainer (for floor installation)	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories

1054375	Under-mount sink kit, 23" (584 mm)	<input type="checkbox"/> NA
K-5807	Under-mount sink kit, 36" (914 mm)	<input type="checkbox"/> NA
K-6024	Wood grate	<input type="checkbox"/> NA
K-6028L	Bottom bowl rack (left-side of drain)	<input type="checkbox"/> ST
K-6028R	Bottom bowl rack (right-side of drain)	<input type="checkbox"/> ST

Product Specification

The tile-in utility sink shall be made of cast iron with acid-resistant enamel finish. Sink shall be 48" (1219 mm) in length and 25" (635 mm) in width. Sink shall be single compartment. Sink shall be Kohler Model K-6606-_____.

OCEANVIEW™

Technical Information


Fixture:*	
Bowl area	42-3/16" (1072 mm) x 18-3/8" (467 mm)
Water depth	6-3/8" (162 mm)
Drain hole	3-5/8" (92 mm) inside diameter
* Approximate measurements for comparison only.	
Cut-out, tile-in	47-1/2" (1207 mm) x 24-1/2" (622 mm) with 1" (25 mm) radius corners
Cut-out, under-mount	44-3/8" (1127 mm) x 20-1/2" (521 mm) with 2-7/8" (73 mm) radius corners

Installation Notes

Install this product according to the installation guide.

Undersink access may be necessary to make the drain connection to the trap

Allow for adequate clearance between the bottom of the sink to the trap to complete the drain connection.

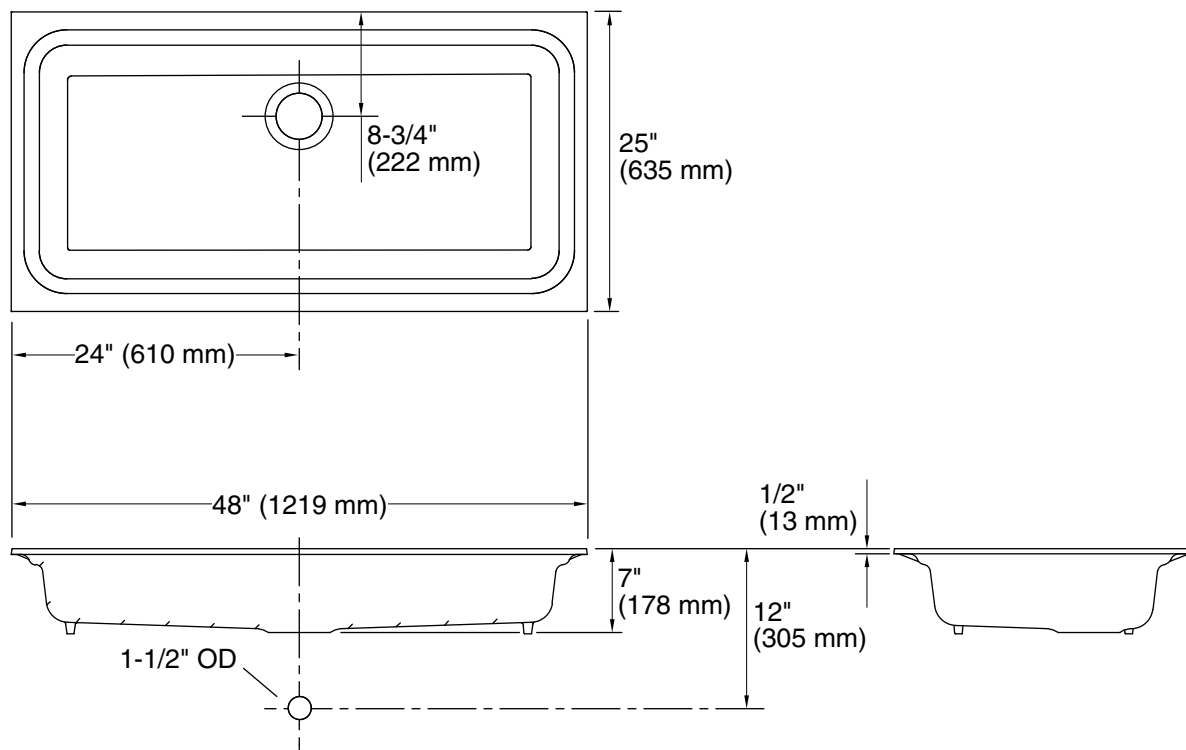

Product Diagram