
Linear Fluorescent

Undercabinet



| Туре | |
|-------|---------|
| | -30EBWB |
| P7020 | |
| P7021 | |
| P7022 | |
| P7023 | |

| Catalog No. | Finish | Lamping | |
|----------------|---------|--|------------------------------|
| | White | | Dimensions (Inches) A B C |
| P7020 | -30EBWB | 1-8w T5 (F8T5) | 12-3/4 1-1/8 3-1/4 |
| P7021 | -30EBWB | 1-13w T5 (F13T5) | 21-3/4 1-1/8 3-1/4 |
| P7022 | -30EBWB | 1-8w T5 (F8T5) & | 34-1/4 1-1/8 3-1/4 |
| | | 1-13wT5 (F13T5) | |
| P7023 | -30EBWB | 2-13w T5 (F13T5) Lamps are included | 43-1/4 1-1/8 3-1/4 |

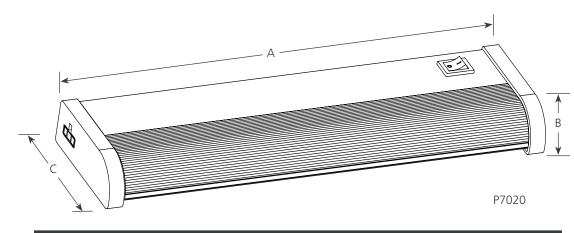

Specifications:

<u>General</u>

- Low profile design
- White acrylic diffuser snaps in place
- All units are linkable (see "Electrical")
- T5 linear fluorescent lamps (3000K) included
- Specular aluminum reflector behind the lamp to maximize the output
- Extruded aluminum housing with polycarbonate end caps

Mounting

- Horizontal (facing down or up) or vertical mounting
- Open keyslots allow quick installation on ¹ pre-installed screws.

<u>Electrical</u>

 All fixtures are electrically linkable by using plug-in linking cables and a special junction box (See below for ordering details)

- The hardwire P8740-XX junction box is used to power the HAL3 fixtures. It has a port to accept a 14/2 AWG Romex with ground and two ports with receptacles for plug in cables
- The plug in cables electrically connect the fixtures to each other and to the junction box. They are P8735-XX (6"), P8733-XX (12"), P8737-XX (18") and P8738-XX (24")
- On-off rocker switch installed
- 120v NPF Electronic ballast with end-oflife protection
- Prewired

<u>Labeling</u>

• CSA listed

Progress Lighting 701 Millennium Blvd. Greenville, South Carolina 29607