SM-2010

Sentinel Mark II® Pressure Balance Shower Sytem

SPECIFICATION





FEATURES:

- Sentinel Mark II concealed anti-scald balanced pressure shower.
- Chrome plated plastic wall plate
- Chrome plated brass lever handle.
- Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back.
- Roughing-in template.
- S-2272-E2 showerhead with flow control device reduces flow to a maximum of 2.0 gpm/7.6 L/min, 1.5 gpm/5.7 L/min.
- S-2500 shower arm and wall flange.
- Four port valve with ½ in. female copper sweat inlets and shower outlet (tub outlet ½ NPT female).
- Furnished with ½ in. pipe plug.

COMPLIANCE:

Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards

□ -LH

FINISH:

• Polished Chrome (standard)

OPTIONS:

ADD SUFFIX TO MODEL #

S-2251 showerhead
 S-2252 showerhead
 S-2253 showerhead
 S-2292 showerhead
 Integral stops

Contractor Packs Available

WARRANTY:

• Less showerhead

• 1 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JANUARY 2014




Management Systems Registered to ISO 9001

SPEAKMAN®

Sentinel Mark II® Pressure Balance Shower Sytem SM-2010

SPECIFICATION

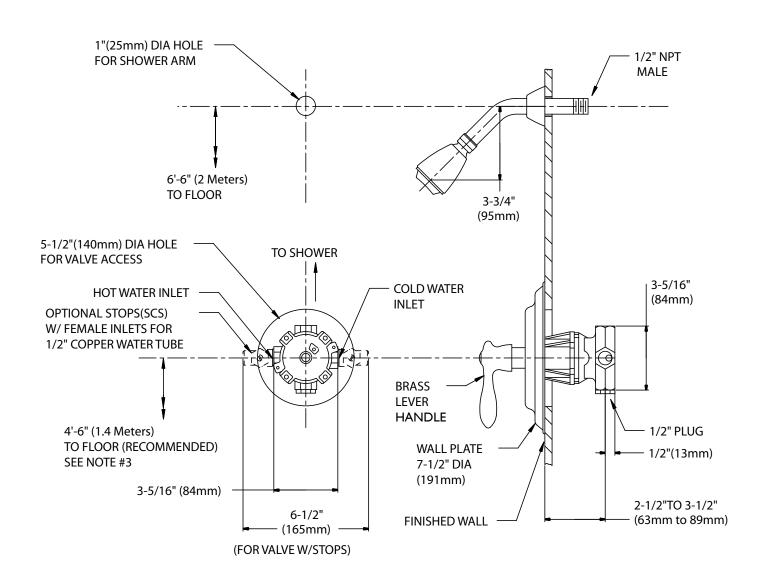

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are ½" female copper sweat. 3. For ADA mounting locations consult ADAAG, ANSI AI 17.1, or state regulations.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 W W W . S P E A K M A N C O M P A N Y . C O M

REVISION DATE: JANUARY 2014



Management Systems
Registered to ISO 9001