



Style That Works Better

COLONY SOFT TWO-HANDLE CENTERSET LAVATORY FAUCET



MODEL NUMBER:

- 2275.503 Colony Soft 2 Handle Centerset Lever Handles. Non-metalic Speed Connect[®] Pop-up drain.
- 2275.509 Colony Soft 2 Handle Centerset Lever Handles. Metal Speed Connect Pop-up drain.

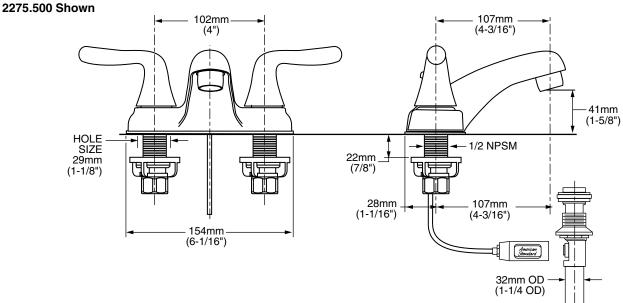

GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterways with one-half inch male inlet shanks. Metal body. Color matched underbody. Lever handles. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece, (2275.509). Non-Metallic Speed Connect drain body with 1-1/4 inch (32mm) tail piece, (2275.503). 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Longer Spout: Provides extended reach into lavatory.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION:

Two-handle 4" centerset lavatory faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2275.____.




COLONY SOFT TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125 NSF 61/Section 9



		Finish Options	
Product		Polished Chrome	PVD Satin Nickel
Number	Description	002	295
	Colony Soft 2 Handle Centerset. Lever Handles. Non-metalic Speed Connect® Pop-up drain		
	Colony Soft 2 Handle Centerset. Lever Handles. Metal Speed Connect Pop-up drain.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.




COLONY SOFT TWO-HANDLE CENTERSET LAVATORY FAUCET

Style That Works Better



MODEL NUMBER:

- ☐ 2275.500 Centerset Lavatory Faucet Lever Handles. 50/50 Pop-up drain.
- 2275.505 Centerset Lavatory Faucet Lever Handles. Less drain. With pop-up hole, plug button and rod.

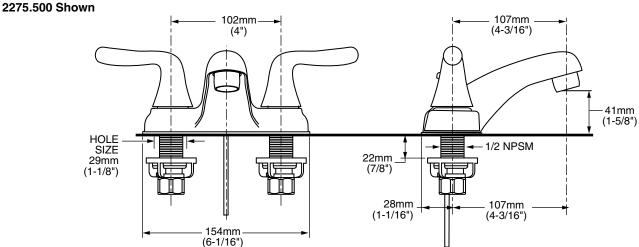

GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterways with one-half inch male inlet shanks. Metal body. Color matched underbody. Lever handles. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Longer Spout: Provides extended reach into lavatory.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION:

Two-handle 4" centerset lavatory faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2275.____.




COLONY SOFT TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125 NSF 61/Section 9



			Finish Options	
Product		Polished Chrome	PVD Satin Nickel	
Number	Description	002	295	
2275.500	Centerset lavatory. Lever Handles. 50/50 Pop-up drain.			
2275.505	Centerset lavatory. Lever Handles. Less drain. With pop-up hole and rod.		N/A	

N/A = NOT AVAILABLE

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.