


Pre-filter replacement EQ-PFC.20



EQ-PFC.20 sediment pre-filter replacement cartridge, for use with your Aquasana Whole House Water Filter.

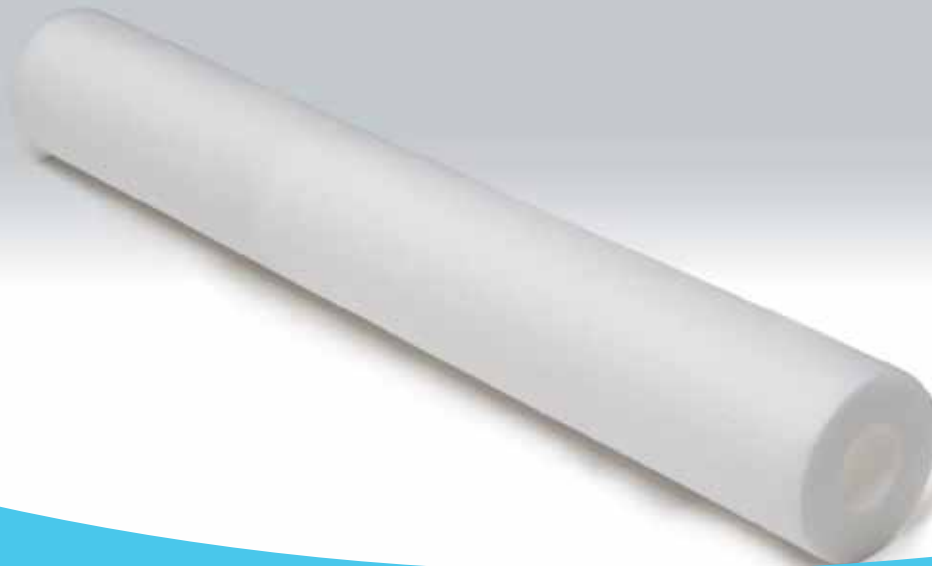

Aquasana's unique whole house filter distributes clean water throughout the entire home. Get healthy, great tasting drinking water from every tap — from the kitchen to the bathroom sink. Experience clean and filtered water for drinking, cooking, bathing and showering.



Our unique three-stage filtration process reduces >97% of the chlorine in your water — all for a low price. It will also reduce other organic compounds, like herbicides and pesticides, in your water.



The system is easy to install with the help of a licensed plumber and requires no electricity or backflushing. System maintenance is easy with filter replacements needed every 300,000 gallons (about three years for the average three- to four-bathroom household), and most people can do it without plumber's assistance.

Choose an Aquasana whole house filter and rest easy knowing you that you made the smartest decision about the water in your home.

Made in the USA.

Whole House pre-filter EQ-PFC.20


What's inside

Stage 1 is a five-micron sediment pre-filter

The sediment pre-filter is used to prevent dirt and sediment particles from entering and clogging the main filter unit. This cartridge should be replaced every 3-6 months depending on water quality and sediment levels. Change when color darkens or water flow slows.

Filters

- Rust
- Dirt
- Microscopic particles

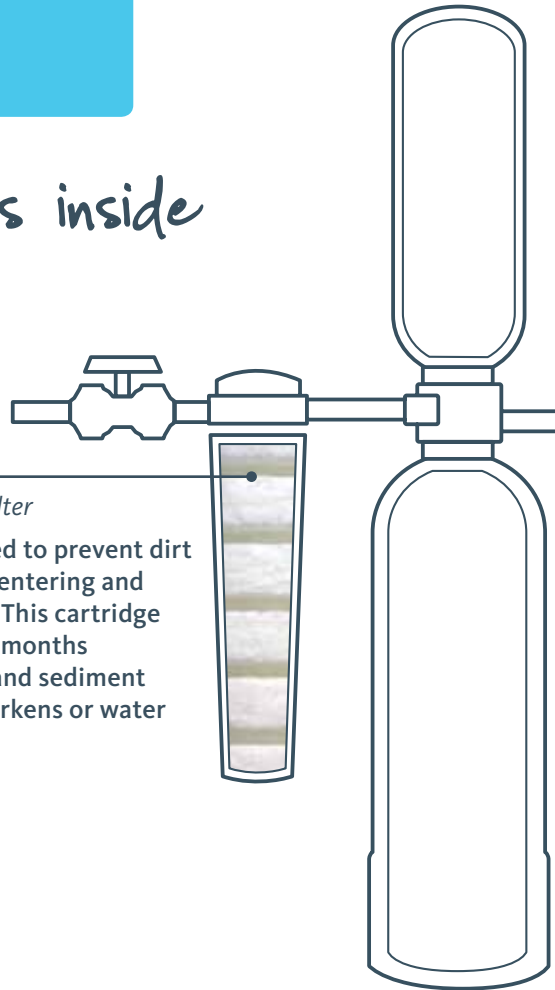

Pure Satisfaction

All Aquasana products offer a 90-day 100% satisfaction guarantee. (This system includes a three-year warranty, which covers defects in materials and workmanship.) If for any reason you are not satisfied with your purchase, contact the dealer you purchased from for a full refund (upon return of the product.)

This filter system is designed and tested for use with genuine Aquasana parts, including replacement filters and all hardware. Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty. Contact your Ferguson dealer for all replacement parts.

Specifications

Pre-filter: EQ-PFC.20
Rated service flow: 7 gpm
Max working pressure: 20-100 psi
Max operating temperature: 40-90° F
Recommended replacement: 3-6 months (as needed)
Available for ¾" or 1" install kits, single or double manifolds