



A M A S C O Company
Phone: (800) 421-0001
Fax: (517) 439-9644
Internet: www.alsonsc.com

Specifications

Full Spray Hand Shower Unit 1551 Series

- Glide rail mounting system
- 1/2-14 NPSM connection point
- Designed and manufactured in accordance with ANSI A112.18.1M
- Canadian Standard Association Certified - B125-93
- Meets ASSE 1014 requirement of withstanding an operating supply pressure of 125 PSI (862kPa)
- Meets ASSE 1014 requirement of withstanding and operating temperature of 110° Fahrenheit (43.3° Celsius)

Hand Shower

- Full spray
- 2.5 GPM @ 80 PSI
- White handle and faceplate with rub clean to remove mineral deposits
- Complies to ANSI/ASME Standard A112.18.1M
- CSA Certified

Swivel Connector


- Acrylic tailpiece with ABS plastic body
- Fits all Alsons pin mount systems

Shower Glide Rail

- 24" vertical self tension slide
- Adhesive or screw mounting
- ADA Compliant

UltraFlex Shower Hose

- 70" long, flexible vinyl hose
- Includes one conical and one hex all brass nuts
- Lifetime Warranty

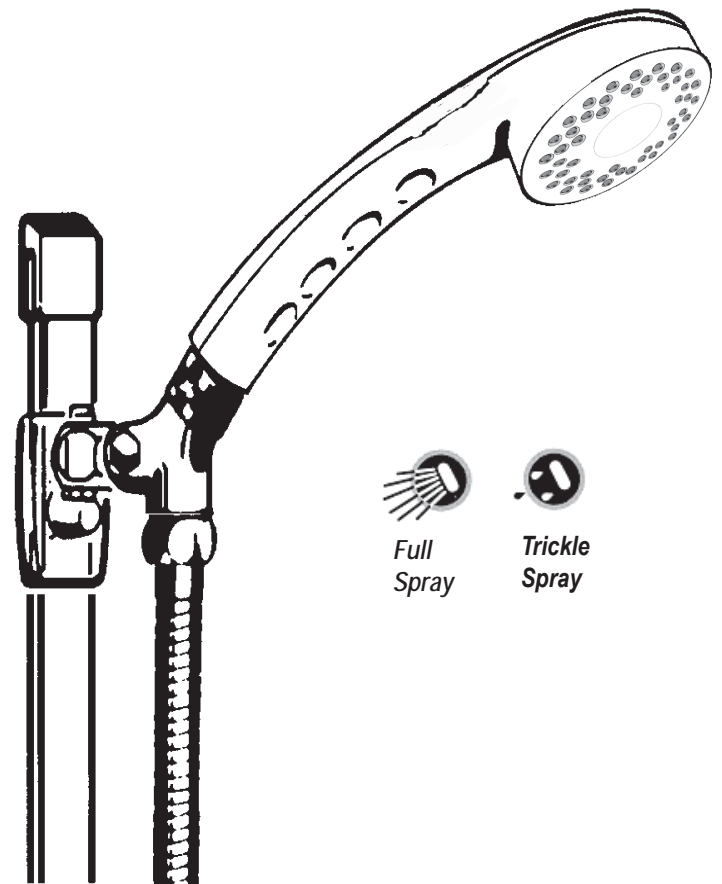

Finishes	Model Numbers
White & Chrome	1551 BX



Made in the USA
Revised 9/05