

GENERAL

Wall mounted drinking fountain constructed of #20 gauge, type 304, stainless steel polished to a lustrous satin finish.

Contoured basin minimizes splashing and has exclusive Flexi-Guard® safety bubbler to prevent accidental mouth injuries. Keyed in location to prevent rotation. Easy to operate, fully functional, stainless steel front push bar is vandal-resistant with raised letters to aid the visually impaired. Flow regulator provides stream from 20 to 105 psi water pressure. Vandal-resistant bottom cover plate.

NO LEAD DESIGN

THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.


Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.

CONSTRUCTION


Furnished complete with Flexi-Guard® safety bubbler, fully assembled front push bar, flow regulator (20 to 105 psi), bottom cover plate and domed strainer. No trap furnished.

STANDARDS

This fountain is certified by WQA to lead-free compliance including NSF/ANSI 372 and 61.

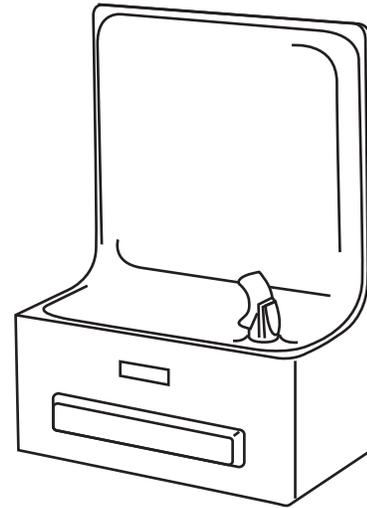

Model EDFP19C

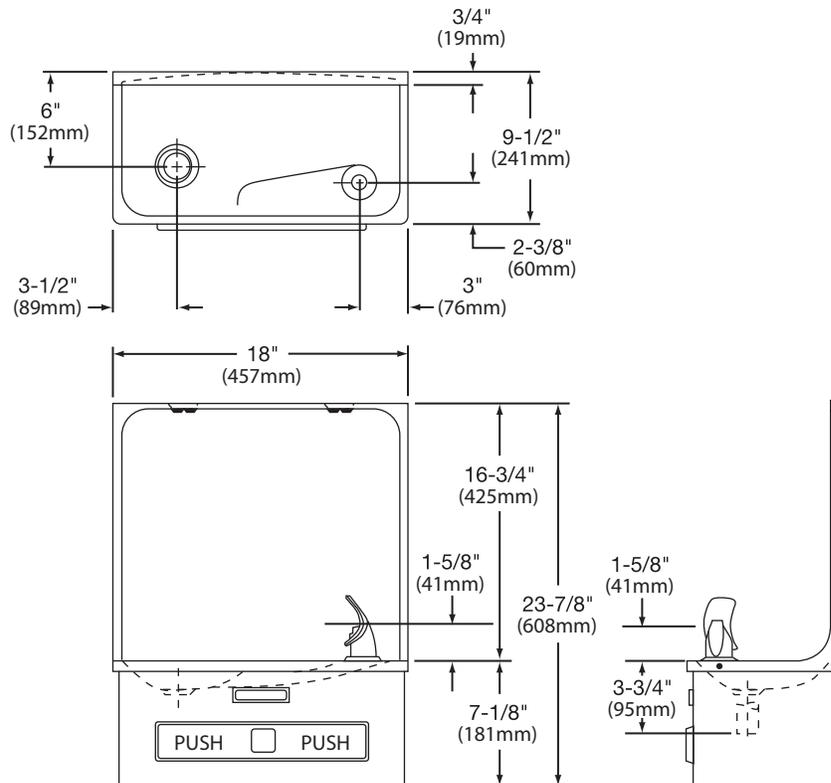

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


**No Lead Simulated Semi-Recessed
Drinking Fountain, Wall Mount -
Fully Exposed Barrier-Free Access
Model EDFP19C**

**ELKAY®
PARTS LIST**




INSTALLER NOTE

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. SHUT-OFF VALVE (NOT FURNISHED) TO ACCEPT 3/8" O.D. UNPLATED COPPER TUBE.

OPERATION OF QUICK CONNECT FITTINGS

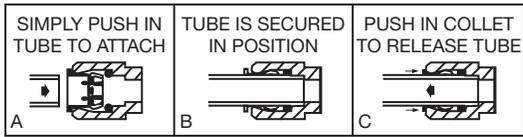

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE

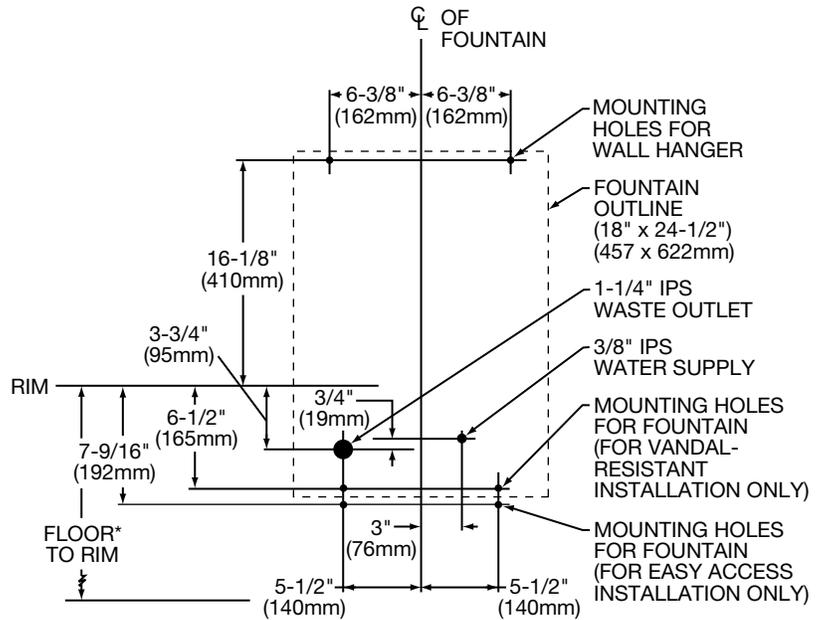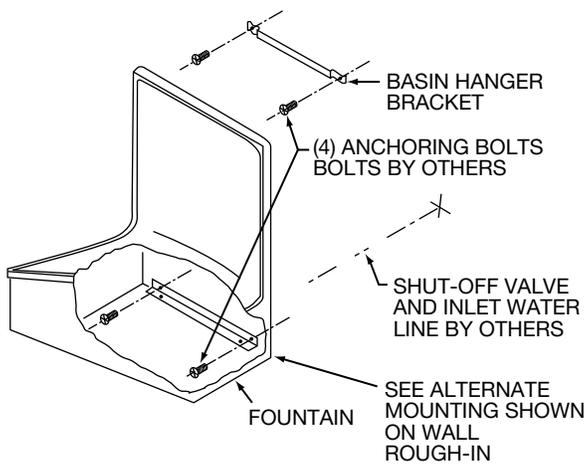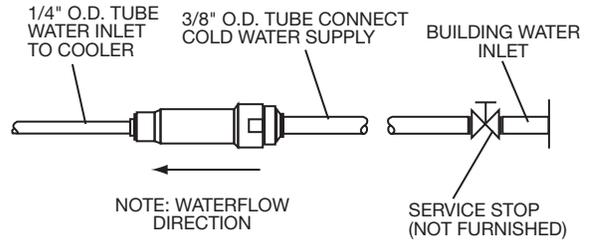

WALL ROUGH-IN

*34-1/8" (823mm) RECOMMENDED HEIGHT FROM FLOOR TO PROVIDE 27" CLEARANCE FROM FLOOR TO UNDERSIDE.