


LG6-4MFC Finish(C)

LG6-4MFK Finish(K)

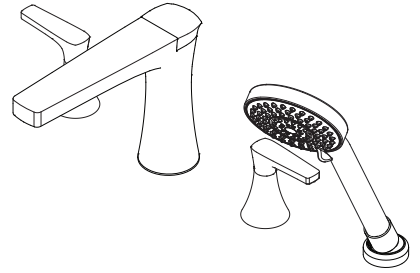

Specifications

- 4-Hole Installation
- Trim Only, Valve Not Included

Features

- 1.8 GPM Flow Rate (Handheld)
- 4-Hole Installation
- Fixed Hubs
- All Metal Construction
- Requires OX6-440R Rough-In
- Multi Function Handheld
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

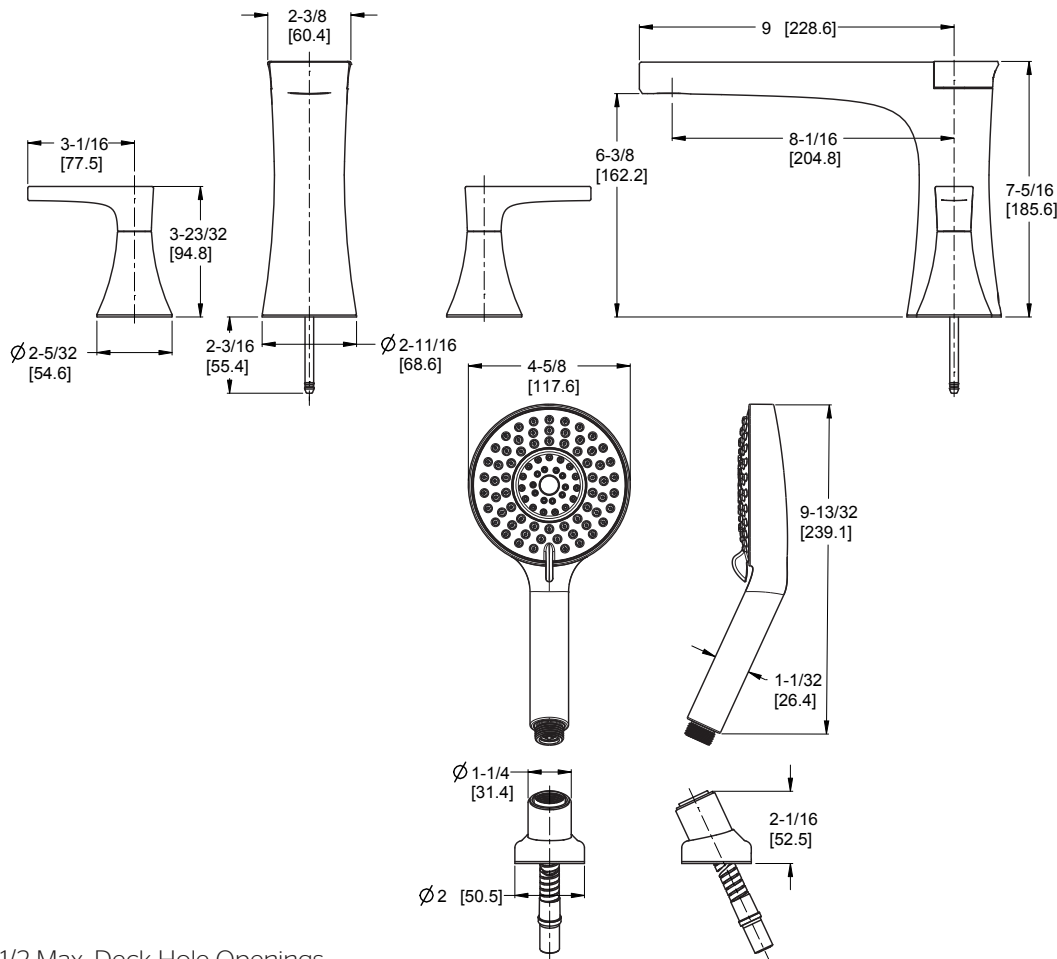

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings