



38-500 SERIES LABORATORY FAUCET VACUUM BREAKER

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® 38-500 Series Lab Faucet Vacuum Breaker is designed to provide protection against back-siphonage wherever a hose is connected to a faucet.

FEATURES

- Corrosion resistant
- Forged brass body
- Polished chrome finish
- Easy to maintain
- Compact and lightweight
- Suitable for hot or cold water service




PERFORMANCE RATING

Maximum Supply Pressure 125 psi
Temperature Range 33 °F – 212 °F


APPROVALS

ASSE® 1035, CSA® B64.7 and IAPMO listed

FLOW CURVE

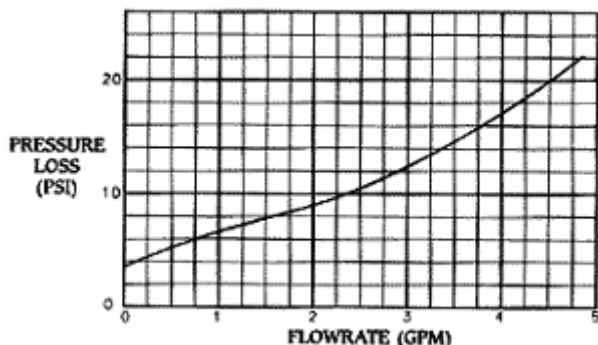

TYPICAL INSTALLATION

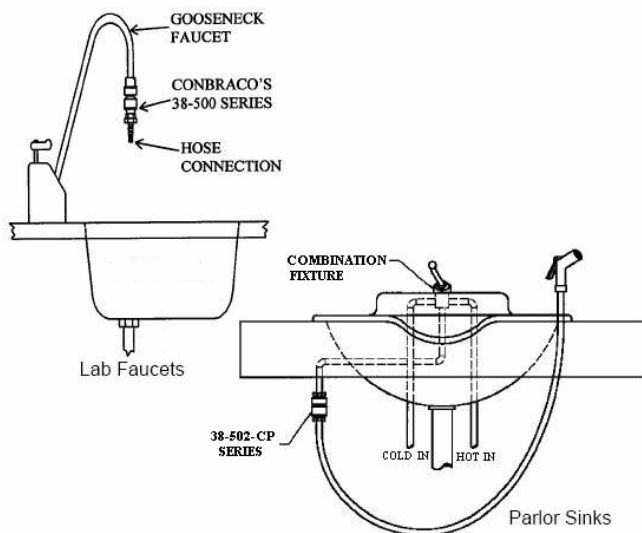

ORDERING INFORMATION

3 8 - 5 0 2 - X X X

OPTIONS

OPTIONS

- ☐ 01 – Inlet: 3/8" MNPSM* Outlet: 3/8" FNPT
- ☐ 02 – Inlet: 3/8" FNPT Outlet: 3/8" FNPT
- ☐ 03 – Inlet: 3/8" FNPT Outlet: 3/8" MNPSM
- ☐ CP2** – Inlet: 1/4" FNPT Outlet: 1/4" FNPT
- ☐ CP3** – Inlet: 3/8" FNPT Outlet: 3/8" FNPT

Note:


*American National Standard straight pipe thread for free-fitting mechanical joints (male)

**CP2 and CP3 are non-approved devices with a rough brass finish for continuous pressure applications

Example: 38-502-02 = 3/8" FNPT x 3/8" FNPT Polished Chrome Lab Faucet Vacuum Breaker

DIMENSIONS (in.) – WEIGHTS (lbs.)

Model No.	A	B	WT.
38-502-01	2.33	1.24	.40
38-502-02	2.34	1.24	.42
35-502-03	2.34	1.24	.42
38-502-CP2	2.34	1.24	.43
38-502-CP3	2.34	1.24	.42

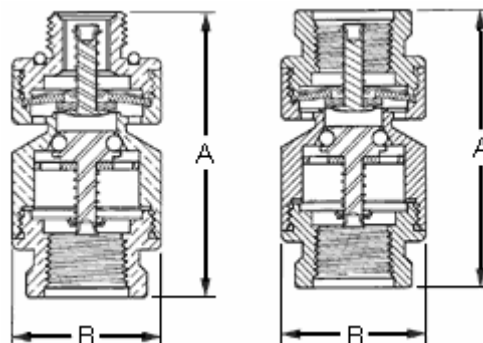

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA; www.conbraco.com; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.