



Air Conditioning & Heating

# GSZ14

**ENERGY-EFFICIENT  
SPLIT SYSTEM HEAT PUMP  
UP TO 15 SEER & 9.0 HSPF  
1½ TO 5 TONS**

**COOLING CAPACITY: 18,000 TO 60,000 BTU/H**

**HEATING CAPACITY: 18,000 TO 60,000 BTU/H**



### Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
Expanded Heating Data.....	20
Performance Data.....	22
AHRI Ratings.....	24
Wiring Diagram.....	43
Dimensions.....	44
Accessories.....	44

### Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

### Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

	G	S	Z	14	036	1	A	A	
	1	2	3	4,5	6,7,8	9	10	11	
<b>Brand</b>	G Goodman® (Standard Feature Set Models)								<b>Engineering *</b> Minor Revision
<b>Product Category</b>	S Split System								<b>Engineering *</b> Major Revision
<b>Unit Type</b>	X Condenser R-410A Z Heat Pump R-410A						1 208/230 V, 1 Phase, 60 Hz 2 220/240 V, 1 Phase, 50 Hz		<b>Electrical</b>
<b>Efficiency</b>	13 13 SEER 14 14 SEER 16 16 SEER						018 1½ Tons    042 3½ Tons 024 2 Tons    048 4 Tons 030 2½ Tons    049 4 Tons 036 3 Tons    060 5 Tons		<b>Nominal Capacity</b>
* Neither used for order entry or inventory management.									

	GSZ14 0181KA	GSZ14 0241KA	GSZ14 0301KA	GSZ14 0361KA	GSZ14 0421KA	GSZ14 0481KA	GSZ14 0491KA	GSZ14 0601KA
<b>NOMINAL CAPACITIES</b>								
Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	48,000	60,000
SEER / EER	14/11.5	14/11.5	14/11.5	14/11.5	14/11.5	14/11.5	14/11.5	14/11.5
Decibels	72	72	74	74	75	75	76	76
<b>COMPRESSOR</b>								
RLA	9.0	10.9	13.5	15.4	16.7	18.5	19.9	26.4
LRA	47.5	62.9	72.5	83.9	109.0	124.0	109.0	134.0
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
<b>CONDENSER FAN MOTOR</b>								
Horsepower	1/6	1/6	1/6	1/6	1/6	1/4	1/6	1/4
FLA	1.1	1.1	1.1	1.1	1.1	1.5	1.1	1.5
<b>REFRIGERATION SYSTEM</b>								
Refrigerant Line Size <sup>1</sup>								
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size								
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	3/4"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	125	125	125	134	158	168	215	214
<b>ELECTRICAL DATA</b>								
Volts/Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Minimum Circuit Ampacity <sup>2</sup>	12.4	14.7	17.9	20.4	22.0	24.6	26.0	34.5
Max. Overcurrent Protection <sup>3</sup>	20	25	30	35	35	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
<b>EQUIPMENT WEIGHT (LBS)</b>	132	142	156	183	191	222	183	260
<b>SHIP WEIGHT (LBS)</b>	146	156	172	199	207	242	199	280

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.  
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

IDB		OUTDOOR AMBIENT TEMPERATURE																											
		65°F				75°F				85°F				95°F				105°F				115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
		ENTERING INDOOR WET BULB TEMPERATURE																											
AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
525	MBh	17.9	18.1	18.7	-	17.7	18.0	18.5	-	17.3	17.5	18.0	-	16.4	16.7	17.2	-	15.5	15.7	16.3	-	14.6	14.8	15.4	-				
	S/T	0.62	0.54	0.40	-	0.62	0.55	0.40	-	0.65	0.57	0.43	-	1.00	0.59	0.45	-	1.00	0.61	0.47	-	1.00	0.67	0.53	-				
	ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-				
	kW	1.06	1.05	1.05	-	1.17	1.17	1.17	-	1.30	1.30	1.30	-	1.45	1.45	1.44	-	1.61	1.60	1.60	-	1.79	1.79	1.79	-				
	Amps	4.0	4.0	4.0	-	4.5	4.5	4.5	-	5.1	5.1	5.1	-	5.8	5.8	5.8	-	6.5	6.5	6.5	-	7.4	7.4	7.4	-				
610	HI PR	244	245	247	-	283	284	286	-	323	325	326	-	367	368	370	-	414	415	417	-	464	465	467	-				
	LO PR	125	126	129	-	132	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	159	162	-				
	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.8	15.1	15.6	-				
	S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.54	-	1.00	0.74	0.60	-				
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	19	17	14	-				
675	kW	1.06	1.06	1.06	-	1.18	1.18	1.18	-	1.31	1.31	1.31	-	1.45	1.45	1.45	-	1.61	1.61	1.61	-	1.80	1.80	1.80	-				
	Amps	4.0	4.0	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.8	5.8	5.8	-	6.6	6.6	6.6	-	7.4	7.4	7.4	-				
	HI PR	247	248	250	-	285	286	288	-	326	327	329	-	369	370	372	-	416	417	419	-	466	468	469	-				
	LO PR	127	128	131	-	134	136	139	-	141	143	146	-	147	148	151	-	152	154	157	-	159	161	164	-				
	MBh	18.4	18.6	19.2	-	18.2	18.5	19.0	-	17.8	18.0	18.5	-	16.9	17.2	17.7	-	16.0	16.2	16.8	-	15.1	15.3	15.9	-				
70	S/T	0.72	0.64	0.50	-	0.73	0.65	0.51	-	0.75	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.72	0.58	-	1.00	0.77	0.63	-				
	ΔT	17	16	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-				
	kW	1.07	1.07	1.06	-	1.18	1.18	1.18	-	1.32	1.31	1.31	-	1.46	1.46	1.46	-	1.62	1.62	1.61	-	1.80	1.80	1.80	-				
	Amps	4.1	4.1	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.8	5.8	5.8	-	6.6	6.6	6.6	-	7.4	7.4	7.4	-				
	HI PR	248	250	251	-	287	288	290	-	328	329	330	-	371	372	374	-	418	419	421	-	468	469	471	-				
LO PR	128	130	133	-	136	138	141	-	143	144	147	-	148	150	153	-	154	155	159	-	161	162	166	-					

525	MBh	17.9	18.1	18.7	19.5	17.7	18.0	18.5	19.3	17.3	17.5	18.1	18.9	16.5	16.7	17.2	18.1	15.5	15.7	16.3	17.1	14.6	14.8	15.4	16.2
	S/T	0.75	0.67	0.53	0.38	0.76	0.68	0.54	0.39	1.00	0.70	0.56	0.42	1.00	0.72	0.58	0.44	1.00	0.75	0.61	0.46	1.00	1.00	0.66	0.51
	ΔT	23	21	18	15	23	21	18	15	23	22	18	15	23	21	18	15	23	21	18	14	24	22	19	15
	kW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.45	1.45	1.44	1.45	1.61	1.60	1.60	1.61	1.79	1.79	1.79	1.80
	Amps	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.6	5.1	5.1	5.1	5.2	5.8	5.8	5.8	5.8	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4
610	HI PR	245	246	247	252	283	284	286	290	324	325	326	331	367	368	370	374	414	415	417	421	464	465	467	471
	LO PR	125	126	129	135	132	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	159	162	167
	MBh	18.2	18.4	18.9	19.8	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4
	S/T	0.82	0.74	0.60	0.46	1.00	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.58
	ΔT	22	20	17	13	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14
675	kW	1.06	1.06	1.06	1.07	1.18	1.18	1.18	1.19	1.31	1.31	1.31	1.32	1.45	1.45	1.45	1.46	1.61	1.61	1.61	1.62	1.80	1.80	1.80	1.80
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.8	5.8	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.4
	HI PR	247	248	250	254	286	287	288	293	326	327	329	333	370	371	372	377	417	418	419	424	467	468	469	474
	LO PR	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169
	MBh	18.4	18.6	19.2	20.0	18.2	18.5	19.0	19.8	17.8	18.0	18.5	19.4	17.0	17.2	17.7	18.6	16.0	16.2	16.8	17.6	15.1	15.3	15.9	16.7
75	S/T	0.85	0.77	0.63	0.49	1.00	0.78	0.64	0.49	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.54	1.00	1.00	0.71	0.56	1.00	1.00	0.76	0.62
	ΔT	21	19	16	13	21	19	16	13	21	20	16	13	21	19	16	13	21	19	16	12	22	20	17	13
	kW	1.07	1.06	1.06	1.07	1.18	1.18	1.18	1.19	1.32	1.31	1.31	1.32	1.46	1.46	1.45	1.46	1.62	1.62	1.61	1.62	1.80	1.80	1.80	1.81
	Amps	4.1	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.8	5.8	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.5
	HI PR	249	250	251	256	287	288	290	294	328	329	331	335	371	372	374	378	418	419	421	425	468	469	471	475
LO PR	129	130	133	139	136	138	141	146	143	144	147	153	148	150	153	158	154	155	159	164	161	162	166	171	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	18.0	18.2	18.8	19.6	17.8	18.1	18.6	19.4	17.4	17.6	18.1	19.0	16.6	16.8	17.3	18.2	15.6	15.8	16.4	17.2	14.7	14.9	15.5	16.3
	S/T	1.00	0.80	0.66	0.51	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.55	1.00	1.00	0.71	0.57	1.00	1.00	0.74	0.59	1.00	1.00	0.79	0.64
	ΔT	27	25	22	19	27	25	22	19	27	25	22	19	27	25	22	18	27	25	22	18	28	26	23	19
	KW	1.06	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.45	1.45	1.44	1.45	1.61	1.60	1.60	1.61	1.79	1.79	1.79	1.80
	Amps	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.6	5.1	5.1	5.1	5.2	5.8	5.8	5.8	5.8	6.5	6.5	6.5	6.6	7.4	7.4	7.4	7.4
	HI PR	245	246	248	252	284	285	286	291	324	325	327	331	368	369	370	375	415	416	417	422	465	466	468	472
	LO PR	125	127	130	135	133	134	138	143	140	141	144	150	145	147	150	155	151	152	155	161	158	159	162	168
	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5
	S/T	1.00	0.87	0.73	0.59	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.86	0.71
	ΔT	26	24	21	17	26	24	21	17	26	24	21	18	26	24	21	17	26	24	20	17	27	25	22	18
KW	1.06	1.06	1.06	1.07	1.18	1.18	1.18	1.19	1.31	1.31	1.31	1.32	1.45	1.45	1.45	1.46	1.61	1.61	1.61	1.62	1.80	1.80	1.80	1.81	
Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.8	5.8	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.4	
HI PR	247	248	250	254	286	287	289	293	326	328	329	334	370	371	373	377	417	418	420	424	467	468	470	474	
LO PR	127	129	132	137	135	136	140	145	142	143	146	152	147	149	152	157	153	154	157	163	160	161	164	170	
MBh	18.5	18.7	19.3	20.1	18.3	18.6	19.1	19.9	17.9	18.1	18.6	19.5	17.0	17.3	17.8	18.7	16.1	16.3	16.9	17.7	15.2	15.4	16.0	16.8	
S/T	1.00	0.90	0.76	0.62	1.00	0.91	0.77	0.62	1.00	0.94	0.80	0.65	1.00	1.00	0.82	0.67	1.00	1.00	0.84	0.69	1.00	1.00	0.89	0.74	
ΔT	25	23	20	17	25	23	20	17	25	24	20	17	25	23	20	17	25	23	20	16	26	24	21	17	
KW	1.07	1.07	1.06	1.07	1.18	1.18	1.18	1.19	1.32	1.31	1.31	1.32	1.46	1.46	1.46	1.46	1.62	1.62	1.61	1.62	1.80	1.80	1.80	1.81	
Amps	4.1	4.1	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.8	5.8	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.5	
HI PR	249	250	252	256	288	289	291	295	328	329	331	335	372	373	375	379	419	420	422	426	469	470	472	476	
LO PR	129	131	134	139	137	138	141	147	143	145	148	153	149	150	154	159	154	156	159	165	161	163	166	171	

85	MBh	18.3	18.5	19.1	19.9	18.1	18.4	18.9	19.7	17.7	17.9	18.4	19.3	16.9	17.1	17.6	18.5	15.9	16.1	16.7	17.5	15.0	15.2	15.8	16.6
	S/T	1.00	0.91	0.77	0.62	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.65	1.00	1.00	0.82	0.67	1.00	1.00	0.84	0.69	1.00	1.00	1.00	0.75
	ΔT	31	29	25	22	30	29	25	22	31	29	26	22	30	29	25	22	30	28	25	22	31	30	26	23
	KW	1.06	1.06	1.05	1.06	1.18	1.17	1.17	1.18	1.31	1.31	1.30	1.31	1.45	1.45	1.45	1.45	1.61	1.61	1.60	1.61	1.79	1.79	1.79	1.80
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.5	4.6	5.2	5.2	5.1	5.2	5.8	5.8	5.8	5.8	6.5	6.5	6.5	6.6	7.4	7.4	7.4	7.4
	HI PR	246	247	249	253	285	286	288	292	325	326	328	332	369	370	372	376	416	417	419	423	466	467	469	473
	LO PR	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170
	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8
	S/T	1.00	0.98	0.84	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.82
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	27	24	21	29	27	24	21	30	28	25	22
KW	1.06	1.06	1.06	1.07	1.18	1.18	1.18	1.19	1.31	1.31	1.31	1.32	1.46	1.45	1.45	1.46	1.61	1.61	1.61	1.62	1.80	1.80	1.80	1.81	
Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.8	5.8	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.4	
HI PR	249	250	251	256	287	288	290	294	328	329	330	335	371	372	374	378	418	419	421	425	468	469	471	475	
LO PR	129	131	134	139	137	138	142	147	143	145	148	154	149	151	154	159	155	156	159	165	162	163	166	172	
MBh	18.8	19.0	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	18.9	19.8	17.4	17.6	18.1	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1	
S/T	1.00	1.00	0.87	0.72	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.80	1.00	1.00	1.00	0.85	
ΔT	29	27	23	20	29	27	23	20	29	27	24	20	28	27	23	20	28	26	23	20	29	28	24	21	
KW	1.07	1.07	1.07	1.07	1.19	1.19	1.18	1.19	1.32	1.32	1.32	1.32	1.46	1.46	1.46	1.47	1.62	1.62	1.62	1.63	1.81	1.80	1.80	1.81	
Amps	4.1	4.1	4.1	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.9	5.9	5.8	5.9	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.5	
HI PR	250	251	253	257	289	290	292	296	329	330	332	336	373	374	376	380	420	421	423	427	470	471	473	477	
LO PR	131	132	136	141	139	140	143	149	145	147	150	155	151	152	156	161	156	158	161	166	163	165	168	173	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
		ENTERING INDOOR WET BULB TEMPERATURE																													
AIRFLOW	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	
<b>700</b>	MBh	23.7	24.0	24.7	-	-	23.4	23.8	24.5	-	-	22.8	23.2	23.9	-	-	21.7	22.1	22.8	-	-	20.4	20.8	21.5	-	-	19.2	19.6	20.3	-	
	S/T	0.59	0.51	0.37	-	-	0.60	0.52	0.37	-	-	0.62	0.54	0.40	-	-	0.65	0.56	0.42	-	-	1.00	0.59	0.44	-	-	1.00	0.64	0.50	-	
	ΔT	19	17	14	-	-	19	17	14	-	-	19	17	14	-	-	19	17	14	-	-	19	17	14	-	-	20	18	15	-	
	kW	1.41	1.40	1.40	-	-	1.57	1.57	1.57	-	-	1.76	1.76	1.75	-	-	1.96	1.96	1.95	-	-	2.18	2.18	2.18	-	-	2.44	2.44	2.44	-	
	Amps	5.2	5.2	5.2	-	-	6.0	5.9	5.9	-	-	6.8	6.8	6.8	-	-	7.7	7.7	7.7	-	-	8.7	8.7	8.7	-	-	9.9	9.9	9.9	-	
	HI PR	249	250	252	-	-	288	290	291	-	-	330	331	333	-	-	374	375	377	-	-	422	423	425	-	-	474	475	476	-	
LO PR	123	124	128	-	-	130	132	135	-	-	137	139	142	-	-	143	144	147	-	-	148	150	153	-	-	155	157	160	-		
<b>800</b>	MBh	23.9	24.2	25.0	-	-	23.7	24.0	24.7	-	-	23.1	23.4	24.1	-	-	22.0	22.3	23.1	-	-	20.7	21.0	21.7	-	-	19.5	19.8	20.6	-	
	S/T	0.67	0.59	0.44	-	-	0.67	0.59	0.45	-	-	0.70	0.62	0.48	-	-	1.00	0.64	0.50	-	-	1.00	0.66	0.52	-	-	1.00	0.72	0.58	-	
	ΔT	18	16	13	-	-	18	16	13	-	-	18	16	13	-	-	18	16	13	-	-	18	16	13	-	-	19	17	14	-	
	kW	1.41	1.41	1.41	-	-	1.58	1.58	1.58	-	-	1.77	1.76	1.76	-	-	1.97	1.96	1.96	-	-	2.19	2.19	2.19	-	-	2.45	2.45	2.45	-	
	Amps	5.2	5.2	5.2	-	-	6.0	6.0	6.0	-	-	6.8	6.8	6.8	-	-	7.8	7.8	7.7	-	-	8.8	8.8	8.8	-	-	10.0	10.0	10.0	-	
	HI PR	251	252	254	-	-	290	292	293	-	-	332	333	335	-	-	376	377	379	-	-	424	426	427	-	-	476	477	479	-	
LO PR	125	126	129	-	-	132	134	137	-	-	139	140	143	-	-	144	146	149	-	-	150	151	154	-	-	157	158	161	-		
<b>870</b>	MBh	24.1	24.5	25.2	-	-	23.9	24.2	25.0	-	-	23.3	23.6	24.3	-	-	22.2	22.6	23.3	-	-	20.9	21.2	22.0	-	-	19.7	20.1	20.8	-	
	S/T	0.71	0.62	0.48	-	-	0.71	0.63	0.49	-	-	0.74	0.66	0.51	-	-	1.00	0.68	0.53	-	-	1.00	0.70	0.56	-	-	1.00	0.76	0.61	-	
	ΔT	17	16	12	-	-	17	15	12	-	-	17	16	13	-	-	17	15	12	-	-	17	15	12	-	-	18	16	13	-	
	kW	1.42	1.42	1.42	-	-	1.59	1.58	1.58	-	-	1.77	1.77	1.77	-	-	1.97	1.97	1.97	-	-	2.20	2.19	2.19	-	-	2.46	2.46	2.45	-	
	Amps	5.3	5.3	5.2	-	-	6.0	6.0	6.0	-	-	6.9	6.9	6.8	-	-	7.8	7.8	7.8	-	-	8.8	8.8	8.8	-	-	10.0	10.0	10.0	-	
	HI PR	252	253	255	-	-	292	293	295	-	-	333	334	336	-	-	378	379	381	-	-	426	427	429	-	-	477	478	480	-	
LO PR	126	127	130	-	-	133	135	138	-	-	140	141	145	-	-	145	147	150	-	-	151	152	156	-	-	158	159	163	-		

IDB		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
		ENTERING INDOOR WET BULB TEMPERATURE																													
AIRFLOW	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	59	63	67	71	71	71	
<b>700</b>	MBh	23.7	24.0	24.7	25.8	25.8	23.5	23.8	24.5	25.6	25.6	22.8	23.2	23.9	25.0	25.0	21.8	22.1	22.8	23.9	23.9	20.5	20.8	21.5	22.6	22.6	19.3	19.6	20.3	21.4	
	S/T	0.73	0.65	0.50	0.35	0.35	0.73	0.65	0.51	0.36	0.36	1.00	0.68	0.54	0.39	0.39	1.00	0.70	0.56	0.41	0.41	1.00	0.72	0.58	0.43	0.43	1.00	1.00	0.64	0.48	
	ΔT	23	21	18	15	15	23	21	18	14	14	23	21	18	15	15	23	21	18	14	14	22	21	17	14	14	23	22	19	15	
	kW	1.40	1.40	1.40	1.41	1.41	1.57	1.57	1.57	1.58	1.58	1.76	1.75	1.75	1.76	1.76	1.96	1.95	1.95	1.96	1.96	2.18	2.18	2.18	2.19	2.19	2.44	2.44	2.44	2.45	
	Amps	5.2	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.0	6.8	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.8	7.8	8.7	8.7	8.7	8.8	8.8	9.9	9.9	9.9	10.0	
	HI PR	249	250	252	256	256	289	290	291	296	296	330	331	333	337	337	375	376	377	382	382	423	424	425	430	430	474	475	477	481	
LO PR	123	125	128	133	133	131	132	135	140	140	137	139	142	147	147	143	144	147	153	153	148	150	153	158	158	155	157	160	165		
<b>800</b>	MBh	23.9	24.3	25.0	26.1	26.1	23.7	24.0	24.8	25.8	25.8	23.1	23.4	24.1	25.2	25.2	22.0	22.4	23.1	24.2	24.2	20.7	21.1	21.8	22.8	22.8	19.5	19.9	20.6	21.7	
	S/T	0.80	0.72	0.58	0.43	0.43	0.81	0.73	0.59	0.44	0.44	1.00	0.76	0.61	0.46	0.46	1.00	0.78	0.63	0.48	0.48	1.00	0.80	0.66	0.51	0.51	1.00	1.00	0.71	0.56	
	ΔT	22	20	17	13	13	21	20	17	13	13	22	20	17	14	14	21	20	17	13	13	21	20	16	13	13	22	21	17	14	
	kW	1.41	1.41	1.41	1.41	1.41	1.58	1.58	1.58	1.59	1.59	1.76	1.76	1.76	1.77	1.77	1.96	1.96	1.96	1.97	1.97	2.19	2.19	2.18	2.20	2.20	2.45	2.45	2.45	2.46	
	Amps	5.2	5.2	5.2	5.3	5.3	6.0	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	6.9	7.8	7.7	7.7	7.8	7.8	8.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	
	HI PR	251	252	254	258	258	291	292	294	298	298	332	333	335	339	339	377	378	379	384	384	425	426	427	432	432	476	477	479	483	
LO PR	125	126	129	135	135	132	134	137	142	142	139	140	143	149	149	144	146	149	154	154	150	151	154	160	160	157	158	161	167		
<b>870</b>	MBh	24.1	24.5	25.2	26.3	26.3	23.9	24.3	25.0	26.1	26.1	23.3	23.6	24.3	25.4	25.4	22.2	22.6	23.3	24.4	24.4	20.9	21.3	22.0	23.1	23.1	19.7	20.1	20.8	21.9	
	S/T	0.84	0.76	0.62	0.47	0.47	1.00	0.77	0.62	0.47	0.47	1.00	0.79	0.65	0.50	0.50	1.00	0.82	0.67	0.52	0.52	1.00	0.84	0.69	0.54	0.54	1.00	1.00	0.75	0.60	
	ΔT	21	19	16	13	13	21	19	16	13	13	21	19	16	13	13	21	19	16	13	13	21	19	16	13	13	22	20	17	14	
	kW	1.42	1.42	1.41	1.43	1.43	1.58	1.58	1.58	1.59	1.59	1.77	1.77	1.77	1.78	1.78	1.97	1.97	1.97	1.98	1.98	2.19	2.19	2.19	2.20	2.20	2.46	2.46	2.45	2.47	
	Amps	5.3	5.2	5.2	5.3	5.3	6.0	6.0	6.0	6.1	6.1	6.9	6.9	6.8	6.9	6.9	7.8	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	
	HI PR	253	254	255	260	260	292	293	295	299	299	333	335	336	341	341	378	379	381	385	385	426	427	429	433	433	477	478	480	484	
LO PR	126	127	130	136	136	133	135	138	143	143	140	141	145	150	150	146	147	150	155	155	151	153	156	161	161	158	159	163	168		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
		59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71
80	700	MBh	23.8	24.1	24.8	25.9	23.6	23.9	24.6	25.7	23.0	23.3	24.0	25.1	21.9	22.2	22.9	24.0	20.6	20.9	21.6	22.7	19.4	19.7	20.4	21.5					
		S/T	1.00	0.78	0.64	0.49	1.00	0.79	0.64	0.49	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.54	1.00	1.00	0.71	0.56	1.00	1.00	0.77	0.62					
		ΔT	26	25	22	18	26	25	21	18	26	25	22	18	26	25	21	18	26	24	21	18	27	25	22	19					
		kW	1.41	1.40	1.40	1.41	1.57	1.57	1.57	1.58	1.57	1.76	1.76	1.75	1.76	1.96	1.96	1.95	1.97	2.18	2.18	2.18	2.19	2.44	2.44	2.44	2.45				
		Amps	5.2	5.2	5.2	5.2	6.0	5.9	5.9	6.0	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.8	8.7	8.7	8.7	8.8	9.9	9.9	9.9	10.0				
	HI PR	250	251	252	257	289	290	292	296	289	330	332	333	338	375	376	378	382	423	424	426	430	474	475	477	482					
	LO PR	124	125	128	133	131	133	136	141	138	139	142	148	143	143	145	148	153	149	150	153	159	156	157	160	166					
	MBh	24.0	24.4	25.1	26.2	23.8	24.2	24.9	26.0	23.2	23.6	24.3	25.3	22.1	22.5	23.2	24.3	20.8	21.2	21.9	23.0	19.6	20.0	20.7	21.8						
	S/T	1.00	0.86	0.71	0.56	1.00	0.86	0.72	0.57	1.00	0.89	0.75	0.59	1.00	1.00	0.77	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.84	0.69						
	ΔT	25	24	20	17	25	24	20	17	25	24	21	17	25	24	20	17	25	23	20	17	26	24	21	18						
kW	1.41	1.41	1.41	1.42	1.58	1.58	1.58	1.59	1.77	1.76	1.76	1.77	1.97	1.97	1.96	1.96	1.97	2.19	2.19	2.19	2.20	2.45	2.45	2.45	2.46						
Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0							
HI PR	252	253	255	259	291	292	294	298	333	334	335	340	377	378	380	384	425	426	428	432	476	477	479	484							
LO PR	125	127	130	135	133	134	137	143	139	141	144	149	145	145	146	150	155	150	152	155	160	157	159	162	167						
MBh	24.3	24.6	25.3	26.4	24.0	24.4	25.1	26.2	23.4	23.8	24.5	25.6	22.4	22.7	23.4	24.5	21.0	21.4	22.1	23.2	19.9	20.2	20.9	22.0							
S/T	1.00	0.89	0.75	0.60	1.00	0.90	0.76	0.61	1.00	0.93	0.78	0.63	1.00	1.00	0.80	0.65	1.00	1.00	0.83	0.68	1.00	1.00	0.88	0.73							
ΔT	25	23	20	17	25	23	20	17	25	23	20	17	25	23	20	16	24	23	20	16	25	24	21	17							
kW	1.42	1.42	1.42	1.43	1.59	1.58	1.58	1.59	1.77	1.77	1.77	1.78	1.97	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.20	2.46	2.46	2.45	2.47						
Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0							
HI PR	253	254	256	260	293	294	295	300	334	335	337	341	378	380	381	386	426	426	428	434	478	479	481	485							
LO PR	126	128	131	136	134	135	139	144	140	142	145	150	146	146	148	151	156	152	153	156	161	158	160	163	168						

85	700	MBh	24.2	24.5	25.2	26.3	24.0	24.3	25.0	26.1	23.4	23.7	24.4	25.5	22.3	22.6	23.3	24.4	21.0	21.3	22.0	23.1	19.8	20.1	20.8	21.9
		S/T	1.00	0.89	0.74	0.59	1.00	0.89	0.75	0.60	1.00	1.00	0.78	0.63	1.00	1.00	0.80	0.65	1.00	1.00	0.82	0.67	1.00	1.00	1.00	0.72
		ΔT	30	28	25	22	30	28	25	22	30	28	25	22	30	28	25	21	29	28	25	21	30	29	26	22
		kW	1.41	1.41	1.40	1.42	1.57	1.57	1.57	1.58	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.45	2.45	2.44	2.45
		Amps	5.2	5.2	5.2	5.2	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.8	8.8	8.7	8.7	8.8	10.0	10.0	10.0	10.0
	HI PR	251	252	254	258	290	291	293	297	332	333	334	339	376	377	379	383	424	425	427	431	475	477	478	483	
	LO PR	125	127	130	135	133	134	138	143	140	141	144	149	145	145	147	150	155	151	152	155	161	157	159	162	167
	MBh	24.5	24.8	25.5	26.6	24.2	24.6	25.3	26.4	23.6	24.0	24.7	25.7	26.7	22.5	22.9	23.6	24.7	21.2	21.6	22.3	23.4	20.0	20.4	21.1	22.2
	S/T	1.00	0.96	0.82	0.67	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.90	0.75	1.00	1.00	1.00	0.80	
	ΔT	29	27	24	20	29	27	24	20	29	27	24	21	29	27	24	20	28	27	23	20	29	28	25	21	
kW	1.42	1.42	1.41	1.43	1.58	1.58	1.58	1.59	1.77	1.77	1.77	1.78	1.97	1.97	1.96	1.98	2.19	2.19	2.19	2.20	2.46	2.45	2.45	2.46		
Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.9	6.8	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0		
HI PR	253	254	256	260	292	293	295	300	334	335	337	341	378	379	381	385	426	427	429	433	478	479	480	485		
LO PR	127	129	132	137	135	136	139	144	141	143	146	151	147	147	148	151	157	152	154	157	162	159	161	164	169	
MBh	24.7	25.0	25.7	26.8	24.4	24.8	25.5	26.6	23.8	24.2	24.9	26.0	26.6	22.8	23.1	23.8	24.9	21.4	21.8	22.5	23.6	20.3	20.6	21.3	22.4	
S/T	1.00	1.00	0.86	0.71	1.00	1.00	0.86	0.71	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.84		
ΔT	28	26	23	20	28	26	23	20	28	26	23	20	28	26	23	20	28	26	23	20	29	27	24	21		
kW	1.42	1.42	1.42	1.43	1.59	1.59	1.58	1.60	1.77	1.77	1.77	1.78	1.97	1.97	1.97	1.98	2.20	2.20	2.19	2.21	2.46	2.46	2.46	2.47		
Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1		
HI PR	254	255	257	261	294	295	297	301	335	336	338	342	380	381	382	387	428	429	430	435	479	480	482	486		
LO PR	128	130	133	138	136	137	140	146	142	144	147	152	148	148	149	153	158	153	155	158	163	160	162	165	170	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	870	MBh	28.4	28.8	29.7	-	28.2	28.6	29.4	-	27.5	27.9	28.7	-	26.2	26.6	27.4	-	24.7	25.1	25.9	-	23.3	23.6	24.5	-
		S/T	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	1.00	0.70	0.56	-
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	
	kW	1.69	1.69	1.68	-	1.89	1.89	1.89	-	2.12	2.11	2.11	-	2.36	2.36	2.35	-	2.63	2.63	2.63	-	2.95	2.95	2.95	-	
	Amps	6.5	6.5	6.5	-	7.5	7.5	7.4	-	8.5	8.5	8.5	-	9.6	9.6	9.6	-	10.9	10.9	10.8	-	12.3	12.3	12.3	-	
	HI PR	250	251	253	-	289	290	292	-	330	331	333	-	374	375	377	-	422	423	425	-	473	474	475	-	
	LO PR	118	120	123	-	125	127	130	-	131	133	136	-	137	138	141	-	142	143	146	-	148	150	153	-	
	MBh	29.0	29.4	30.2	-	28.7	29.1	30.0	-	28.0	28.4	29.2	-	26.7	27.1	28.0	-	25.2	25.6	26.4	-	23.8	24.2	25.0	-	
	S/T	0.69	0.61	0.48	-	0.69	0.62	0.49	-	0.72	0.64	0.51	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	
	ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	17	15	12	-	18	17	13	-	
kW	1.70	1.70	1.69	-	1.90	1.90	1.90	-	2.13	2.12	2.12	-	2.37	2.37	2.36	-	2.64	2.64	2.64	-	2.96	2.96	2.96	-		
Amps	6.6	6.6	6.6	-	7.5	7.5	7.5	-	8.5	8.5	8.5	-	9.7	9.7	9.6	-	10.9	10.9	10.9	-	12.4	12.4	12.4	-		
HI PR	252	254	255	-	292	293	294	-	333	334	335	-	377	378	380	-	424	425	427	-	475	476	478	-		
LO PR	120	122	125	-	128	129	132	-	134	135	138	-	139	140	143	-	144	146	149	-	151	152	155	-		
MBh	29.6	30.0	30.9	-	29.4	29.8	30.6	-	28.6	29.0	29.9	-	27.4	27.8	28.6	-	25.8	26.2	27.1	-	24.4	24.8	25.7	-		
S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	0.72	0.65	0.52	-	0.74	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-		
ΔT	17	15	11	-	17	15	11	-	17	15	12	-	17	15	11	-	16	15	11	-	17	16	12	-		
kW	1.71	1.71	1.70	-	1.91	1.91	1.90	-	2.13	2.13	2.13	-	2.38	2.38	2.37	-	2.65	2.65	2.65	-	2.97	2.97	2.97	-		
Amps	6.6	6.6	6.6	-	7.6	7.6	7.5	-	8.6	8.6	8.6	-	9.7	9.7	9.7	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-		
HI PR	255	256	258	-	294	295	297	-	335	336	338	-	379	380	382	-	427	428	430	-	478	479	480	-		
LO PR	123	124	127	-	130	132	134	-	136	138	141	-	142	143	146	-	147	148	151	-	153	155	158	-		

75	870	MBh	28.5	28.9	29.7	31.0	28.2	28.6	29.4	30.7	27.5	27.9	28.7	30.0	26.2	26.6	27.5	28.7	24.7	25.1	25.9	27.2	23.3	23.7	24.5	25.8
		S/T	0.77	0.70	0.57	0.43	0.78	0.71	0.57	0.44	0.81	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.82	0.69	0.55
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	24	22	18	15	
	kW	1.69	1.69	1.68	1.70	1.89	1.89	1.88	1.90	2.11	2.11	2.11	2.12	2.36	2.36	2.35	2.37	2.63	2.63	2.63	2.64	2.95	2.95	2.95	2.96	
	Amps	6.5	6.5	6.5	6.6	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.5	9.6	9.6	9.6	9.7	10.9	10.9	10.8	10.9	12.3	12.3	12.3	12.4	
	HI PR	250	251	253	257	289	290	292	297	330	331	333	337	374	374	376	377	382	422	423	425	429	473	474	476	480
	LO PR	118	120	123	128	125	127	130	135	131	133	136	141	137	137	138	141	146	142	143	146	151	148	150	153	158
	MBh	29.0	29.4	30.2	31.5	28.8	29.1	30.0	31.3	28.0	28.4	29.3	30.5	26.8	27.2	28.0	29.3	25.2	25.6	26.5	27.7	23.8	24.2	25.0	26.3	
	S/T	0.81	0.74	0.61	0.47	0.82	0.74	0.61	0.47	1.00	0.77	0.64	0.50	1.00	0.79	0.65	0.52	1.00	0.81	0.68	0.54	1.00	0.86	0.73	0.59	
	ΔT	22	20	16	13	22	20	16	13	22	20	17	13	22	20	16	13	21	19	16	13	22	21	17	14	
kW	1.70	1.70	1.69	1.71	1.90	1.90	1.89	1.91	2.12	2.12	2.12	2.14	2.37	2.37	2.36	2.38	2.64	2.64	2.64	2.65	2.96	2.96	2.96	2.97		
Amps	6.6	6.6	6.6	6.6	7.5	7.5	7.5	7.6	8.5	8.5	8.5	8.6	9.7	9.7	9.6	9.7	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.4		
HI PR	253	254	256	260	292	293	295	299	333	334	336	340	377	378	380	384	425	426	427	432	475	476	478	482		
LO PR	120	122	125	130	128	129	132	137	134	135	138	143	139	140	143	148	144	146	149	153	151	152	155	160		
MBh	29.6	30.0	30.9	32.2	29.4	29.8	30.6	31.9	28.7	29.1	29.9	31.2	27.4	27.8	28.6	29.9	25.9	26.3	27.1	28.4	24.5	24.8	25.7	27.0		
S/T	0.82	0.74	0.61	0.47	0.82	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.81	0.68	0.54	1.00	0.86	0.73	0.59		
ΔT	21	19	15	12	21	19	15	12	21	19	16	12	21	19	15	12	21	19	15	12	22	20	16	13		
kW	1.71	1.70	1.70	1.72	1.91	1.91	1.90	1.92	2.13	2.13	2.13	2.14	2.38	2.38	2.37	2.39	2.65	2.65	2.64	2.66	2.97	2.97	2.96	2.98		
Amps	6.6	6.6	6.6	6.7	7.6	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.7	9.7	9.7	9.7	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.5		
HI PR	255	256	258	262	294	295	297	301	335	336	338	342	379	380	382	387	427	428	430	434	478	479	481	485		
LO PR	123	124	127	132	130	132	135	139	136	138	141	146	142	143	146	151	147	148	151	156	153	155	158	163		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)



IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	28.6	29.0	29.8	31.1	28.4	28.8	29.6	30.9	27.6	28.0	28.9	30.1	26.4	26.8	27.6	28.9	24.8	25.2	26.1	27.3	23.4	23.8	24.7	25.9
	S/T	0.90	0.82	0.69	0.55	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.81	0.67
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19
	kW	1.69	1.69	1.68	1.70	1.89	1.89	1.88	1.90	2.12	2.11	2.11	2.13	2.36	2.36	2.35	2.37	2.63	2.63	2.63	2.64	2.95	2.95	2.95	2.96
	Amps	6.5	6.5	6.5	6.6	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.5	9.6	9.6	9.6	9.7	10.9	10.9	10.8	10.9	12.3	12.3	12.3	12.4
	HI PR	251	252	254	258	290	291	293	297	331	332	334	338	375	376	378	382	423	424	425	430	473	474	476	480
	LO PR	119	120	123	128	126	127	130	135	132	133	136	141	137	139	142	147	142	144	147	152	149	150	153	158
	MBh	29.2	29.5	30.4	31.7	28.9	29.3	30.1	31.4	28.2	28.6	29.4	30.7	26.9	27.3	28.1	29.4	25.4	25.8	26.6	27.9	24.0	24.4	25.2	26.5
	S/T	0.93	0.86	0.73	0.59	1.00	0.87	0.73	0.59	1.00	0.89	0.76	0.62	1.00	0.91	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.85	0.71
	ΔT	26	24	20	17	26	24	20	17	26	24	21	17	26	24	20	17	25	24	20	17	27	25	21	18
kW	1.70	1.70	1.69	1.71	1.90	1.90	1.90	1.91	2.13	2.12	2.12	2.14	2.37	2.37	2.36	2.38	2.64	2.64	2.64	2.65	2.96	2.96	2.96	2.97	
Amps	6.6	6.6	6.6	6.6	7.5	7.5	7.5	7.6	8.5	8.5	8.5	8.6	9.7	9.7	9.6	9.7	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.4	
HI PR	253	254	256	260	292	293	295	299	333	334	336	340	377	378	380	385	425	426	428	432	476	477	479	483	
LO PR	121	122	125	130	128	129	132	137	134	136	139	144	139	141	144	149	145	146	149	154	151	153	155	160	
MBh	29.8	30.2	31.0	32.3	29.5	29.9	30.8	32.1	28.8	29.2	30.0	31.3	27.5	27.9	28.8	30.1	26.0	26.4	27.2	28.5	24.6	25.0	25.8	27.1	
S/T	1.00	0.87	0.73	0.59	1.00	0.87	0.74	0.60	1.00	0.90	0.76	0.63	1.00	0.92	0.78	0.64	1.00	1.00	0.80	0.67	1.00	1.00	0.86	0.72	
ΔT	25	23	19	16	25	23	19	16	25	23	20	16	25	23	19	16	24	23	19	16	26	24	20	17	
kW	1.71	1.71	1.70	1.72	1.91	1.91	1.90	1.92	2.13	2.13	2.13	2.14	2.38	2.38	2.37	2.39	2.65	2.65	2.65	2.66	2.97	2.97	2.97	2.98	
Amps	6.6	6.6	6.6	6.7	7.6	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.7	9.7	9.7	9.8	11.0	10.9	10.9	11.0	12.4	12.4	12.4	12.5	
HI PR	256	257	258	263	295	296	298	302	336	337	339	343	380	381	383	387	427	428	430	435	478	479	481	485	
LO PR	124	125	128	133	131	132	135	140	137	138	141	146	142	144	146	151	147	149	152	157	154	155	158	163	
85	MBh	29.1	29.5	30.3	31.6	28.8	29.2	30.1	31.3	28.1	28.5	29.3	30.6	26.8	27.2	28.1	29.4	25.3	25.7	26.5	27.8	23.9	24.3	25.1	26.4
	S/T	1.00	0.92	0.79	0.65	1.00	0.93	0.80	0.66	1.00	0.95	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.91	0.77
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	22	31	29	26	22
	kW	1.69	1.69	1.69	1.70	1.89	1.89	1.89	1.90	2.12	2.12	2.11	2.13	2.36	2.36	2.36	2.37	2.64	2.63	2.63	2.65	2.96	2.95	2.95	2.97
	Amps	6.6	6.6	6.5	6.6	7.5	7.5	7.5	7.5	8.5	8.5	8.5	8.6	9.6	9.6	9.6	9.7	10.9	10.9	10.9	10.9	12.3	12.3	12.3	12.4
	HI PR	252	253	255	259	291	292	294	298	332	333	335	339	376	377	379	383	424	425	427	431	474	476	477	482
	LO PR	120	122	125	130	127	129	132	137	134	135	138	143	139	140	143	148	144	146	148	153	151	152	155	160
	MBh	29.6	30.0	30.9	32.1	29.4	29.8	30.6	31.9	28.6	29.0	29.9	31.2	27.4	27.8	28.6	29.9	25.8	26.2	27.1	28.4	24.4	24.8	25.7	26.9
	S/T	1.00	0.96	0.83	0.69	1.00	0.96	0.83	0.69	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.95	0.81
	ΔT	29	27	24	20	29	27	24	20	29	28	24	21	29	27	24	20	29	27	24	20	30	28	25	21
kW	1.70	1.70	1.70	1.71	1.90	1.90	1.90	1.91	2.13	2.13	2.12	2.14	2.37	2.37	2.37	2.38	2.65	2.64	2.64	2.66	2.97	2.96	2.96	2.98	
Amps	6.6	6.6	6.6	6.7	7.5	7.5	7.5	7.6	8.6	8.6	8.5	8.6	9.7	9.7	9.7	9.7	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.4	
HI PR	254	255	257	261	293	295	296	301	334	335	337	342	379	380	381	386	426	427	429	433	477	478	480	484	
LO PR	123	124	127	132	130	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	154	157	162	
MBh	30.3	30.7	31.5	32.8	30.0	30.4	31.2	32.5	29.3	29.7	30.5	31.8	28.0	28.4	29.3	30.5	26.5	26.9	27.7	29.0	25.1	25.5	26.3	27.6	
S/T	1.00	0.96	0.83	0.69	1.00	0.97	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81	
ΔT	28	27	23	20	28	26	23	19	29	27	23	20	28	26	23	19	28	26	23	19	29	27	24	20	
kW	1.71	1.71	1.71	1.72	1.91	1.91	1.91	1.92	2.14	2.14	2.13	2.15	2.38	2.38	2.38	2.39	2.65	2.65	2.65	2.67	2.97	2.97	2.97	2.98	
Amps	6.7	6.6	6.6	6.7	7.6	7.6	7.6	7.6	8.6	8.6	8.6	8.7	9.7	9.7	9.7	9.8	11.0	11.0	10.9	11.0	12.4	12.4	12.4	12.5	
HI PR	257	258	260	264	296	297	299	303	337	338	340	344	381	382	384	388	429	430	431	436	479	480	482	486	
LO PR	125	127	130	135	132	134	137	142	139	140	143	148	144	145	148	153	149	150	153	158	155	157	160	165	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																							
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79
1070	MBh	36.3	36.8	37.9	39.5	41.5	36.0	36.5	37.5	39.2	41.2	35.0	35.5	36.6	38.3	40.3	33.4	33.9	35.0	36.8	38.9	31.5	32.0	33.0	34.9	37.0	29.7	30.2	31.2	33.2	35.4	27.0	27.5	28.5	30.6	32.9	
	S/T	0.65	0.57	0.44	0.32	0.21	0.66	0.58	0.45	0.33	0.22	0.68	0.61	0.47	0.34	0.23	0.70	0.62	0.49	0.36	0.24	0.72	0.64	0.51	0.38	0.26	0.74	0.66	0.53	0.40	0.28	0.76	0.68	0.55	0.42	0.30	
	ΔT	19	18	14	11	8	19	17	14	11	8	20	18	14	11	8	19	17	14	11	8	19	17	13	10	7	19	17	14	11	8	18	16	13	10	7	
	kW	2.17	2.17	2.16	2.14	2.11	2.44	2.43	2.43	2.43	2.42	2.73	2.73	2.72	2.71	2.70	3.05	3.05	3.04	3.03	3.02	3.41	3.41	3.40	3.39	3.38	3.83	3.83	3.82	3.81	3.80						
	Amps	8.3	8.3	8.2	8.1	8.0	9.5	9.5	9.5	9.5	9.5	10.8	10.8	10.8	10.8	10.8	12.3	12.3	12.3	12.3	12.3	13.9	13.9	13.9	13.9	13.9	15.9	15.9	15.8	15.8	15.8						
	HI PR	263	265	266	268	271	305	306	308	311	314	348	349	351	353	356	394	395	397	399	401	444	446	447	448	449	498	499	501	503	506						
	LO PR	121	123	126	130	135	129	130	133	137	141	135	137	140	144	148	140	142	145	148	151	146	147	150	153	156	152	154	157	160	164						
70	MBh	36.8	37.3	38.4	39.8	41.8	36.5	37.0	38.1	39.7	41.7	35.6	36.1	37.2	38.9	40.9	34.0	34.5	35.5	37.3	39.4	32.0	32.5	33.6	35.5	37.7	30.2	30.7	31.8	33.8	36.1						
	S/T	0.68	0.61	0.48	0.35	0.23	0.69	0.61	0.48	0.35	0.23	0.71	0.64	0.51	0.38	0.26	0.73	0.66	0.52	0.39	0.27	0.75	0.68	0.55	0.42	0.30	0.77	0.70	0.57	0.44	0.32						
	ΔT	18	17	13	10	7	18	17	13	10	7	19	17	13	10	7	18	17	13	10	7	18	16	13	10	7	17	15	12	9	6						
	kW	2.18	2.18	2.17	2.15	2.12	2.45	2.44	2.44	2.43	2.42	2.74	2.74	2.74	2.73	2.72	3.06	3.06	3.06	3.05	3.04	3.42	3.42	3.41	3.40	3.39	3.84	3.84	3.83	3.82	3.81						
	Amps	8.3	8.3	8.3	8.3	8.3	9.5	9.5	9.5	9.5	9.5	10.9	10.9	10.9	10.9	10.9	12.4	12.4	12.3	12.3	12.3	14.0	14.0	14.0	14.0	14.0	15.9	15.9	15.9	15.9	15.9						
	HI PR	266	267	268	271	275	307	308	310	313	316	350	351	353	356	359	396	398	399	401	403	447	448	450	452	454	500	501	503	506	510						
	LO PR	123	125	128	132	137	131	132	135	138	141	137	138	142	146	150	142	144	147	150	153	148	149	152	155	158	154	156	159	162	166						
1350	MBh	37.6	38.1	39.2	40.7	42.4	37.3	37.8	38.9	40.6	42.4	36.3	36.8	37.9	39.7	41.6	34.7	35.2	36.3	38.1	40.1	32.8	33.3	34.3	36.2	38.3	31.0	31.5	32.5	34.5	36.7						
	S/T	0.69	0.62	0.49	0.36	0.24	0.70	0.62	0.49	0.36	0.24	0.72	0.65	0.52	0.39	0.27	0.74	0.67	0.54	0.41	0.29	0.76	0.69	0.56	0.43	0.31	0.78	0.71	0.58	0.45	0.33						
	ΔT	18	16	12	9	6	17	16	12	9	6	18	16	12	9	6	17	16	12	9	6	17	15	12	9	6	16	14	11	8	5						
	kW	2.19	2.19	2.19	2.18	2.16	2.46	2.46	2.45	2.44	2.43	2.75	2.75	2.75	2.74	2.73	3.07	3.07	3.07	3.06	3.05	3.43	3.43	3.42	3.41	3.40	3.85	3.85	3.84	3.83	3.82						
	Amps	8.4	8.4	8.4	8.4	8.4	9.6	9.6	9.6	9.6	9.6	10.9	10.9	10.9	10.9	10.9	12.4	12.4	12.4	12.4	12.4	14.1	14.0	14.0	14.0	14.0	16.0	16.0	15.9	15.9	15.9						
	HI PR	268	269	271	275	280	309	310	312	315	318	352	354	355	358	361	399	400	402	404	406	449	450	452	454	456	503	504	505	507	510						
	LO PR	126	127	130	134	139	133	135	138	141	144	139	141	144	147	150	145	146	149	151	153	150	152	155	158	161	157	158	161	164	167						

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																							
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79
75	MBh	36.3	36.8	37.9	39.5	41.5	36.0	36.5	37.6	39.2	41.2	35.0	35.5	36.6	38.3	40.3	33.4	33.9	35.0	36.8	38.9	31.5	32.0	33.0	34.9	37.0	29.7	30.2	31.2	33.2	35.4						
	S/T	0.77	0.70	0.57	0.43	0.30	0.78	0.71	0.57	0.44	0.31	0.80	0.73	0.60	0.46	0.33	0.82	0.75	0.62	0.48	0.35	0.84	0.77	0.64	0.50	0.37	0.86	0.79	0.66	0.52	0.39						
	ΔT	24	22	18	14	11	24	22	18	14	11	24	22	18	15	12	24	22	18	14	11	23	21	17	13	10	22	20	16	12	9						
	kW	2.17	2.17	2.16	2.14	2.11	2.43	2.43	2.43	2.43	2.42	2.73	2.73	2.72	2.71	2.70	3.05	3.05	3.04	3.03	3.02	3.41	3.41	3.40	3.39	3.38	3.83	3.83	3.82	3.81	3.80						
	Amps	8.3	8.3	8.2	8.3	8.3	9.5	9.5	9.5	9.5	9.5	10.8	10.8	10.8	10.9	10.9	12.3	12.3	12.3	12.3	12.3	13.9	13.9	13.9	13.9	13.9	15.9	15.8	15.8	15.9	15.9						
	HI PR	264	265	267	271	275	305	306	308	312	316	348	349	351	356	359	395	396	398	402	406	445	446	448	452	456	498	499	501	506	510						
	LO PR	121	123	126	131	137	129	130	133	138	143	135	137	140	145	150	141	142	145	149	153	146	147	150	153	156	152	154	157	162	167						
1200	MBh	36.9	37.4	38.4	40.1	41.9	36.5	37.0	38.1	39.7	41.7	35.6	36.1	37.2	38.9	40.9	34.0	34.5	35.5	37.3	39.4	32.0	32.5	33.6	35.5	37.7	30.2	30.7	31.8	33.8	36.1						
	S/T	0.81	0.73	0.60	0.46	0.32	0.81	0.74	0.61	0.47	0.33	0.83	0.76	0.63	0.49	0.35	0.85	0.78	0.65	0.51	0.37	0.87	0.80	0.67	0.53	0.39	0.89	0.82	0.69	0.55	0.41						
	ΔT	23	21	17	14	11	23	21	17	13	10	23	21	17	14	11	23	21	17	13	10	22	20	17	13	10	21	19	16	12	9						
	kW	2.18	2.18	2.17	2.15	2.12	2.44	2.44	2.44	2.46	2.46	2.74	2.74	2.73	2.75	2.75	3.06	3.06	3.05	3.07	3.07	3.42	3.42	3.41	3.43	3.43	3.84	3.84	3.83	3.85	3.85						
	Amps	8.3	8.3	8.3	8.4	8.4	9.5	9.5	9.5	9.6	9.6	10.9	10.9	10.9	11.0	11.0	12.4	12.3	12.3	12.4	12.4	14.0	14.0	14.0	14.1	14.1	15.9	15.9	15.9	16.0	16.0						
	HI PR	266	267	269	273	277	307	308	310	314	318	350	351	353	358	361	397	398	400	404	408	447	448	450	454	458	500	501	503	508	512						
	LO PR	123	125	128	133	139	131	132	135	140	145	137	138	142	147	152	142	144	147	151	155	148	149	152	155	158	154	156	159	164	169						
1350	MBh	37.6	38.1	39.2	40.7	42.4	37.3	37.8	38.9	40.6	42.4	36.3	36.8	37.9	39.7	41.6	34.7	35.2	36.3	38.1	40.1	32.8	33.3	34.3	36.2	38.3	31.0	31.5	32.5	34.5	36.7						
	S/T	0.69	0.62	0.49	0.36	0.24	0.70	0.62	0.49	0.36	0.24	0.72	0.65	0.52	0.39	0.27	0.74	0.67	0.54	0.41	0.29	0.76	0.69	0.56	0.43	0.31	0.78	0.71	0.58	0.45	0.33						
	ΔT	18	16	12	9	6	17	16	12	9	6	18	16	12	9	6	17	16	12	9	6	17	15	12	9	6	16	14	11	8	5						
	kW	2.19	2.19	2.19	2.18	2.16	2.46	2.46	2.45	2.44	2.43	2.75	2.75	2.75	2.74	2.73	3.07	3.07	3.07	3.06	3.05	3.43	3.43	3.42	3.41	3.40	3.85	3.85	3.84	3.83	3.82						
	Amps	8.4	8.4	8.4	8.4	8.4	9.6	9.6	9.6	9.6	9.6	10.9	10.9	10.9	10.9	10.9	12.4	12.4	12.4	12.4	12.4	14.1	14.0	14.0	14.0	14.0	16.0	16.0	15.9	15.9	15.9						
	HI PR	268	269	271	275	280	309	310	312	315	318	352	354	355	358	361	399	400	402	404	406	449	45														

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												105°F												115°F											
		65°F				75°F				85°F				95°F				105°F				115°F															
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	1070	MBh	36.5	37.0	38.1	39.7	36.2	36.7	37.7	39.4	35.2	35.7	36.8	38.4	33.6	34.1	35.2	36.8	31.7	32.2	33.2	34.9	29.9	30.4	31.4	33.1											
		S/T	0.90	0.82	0.69	0.55	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.81	0.67											
		ΔT	28	26	22	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20											
		kW	2.17	2.17	2.16	2.18	2.43	2.43	2.43	2.45	2.73	2.73	2.72	2.74	3.05	3.05	3.04	3.06	3.41	3.41	3.40	3.42	3.83	3.83	3.82	3.84											
		Amps	8.3	8.3	8.2	8.3	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.9	12.3	12.3	12.3	12.4	13.9	13.9	13.9	14.0	15.9	15.9	15.8	15.9											
	1200	HI PR	264	265	267	272	305	306	308	313	349	350	351	356	395	396	398	403	445	446	448	453	499	500	502	506											
		LO PR	122	123	127	132	129	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	154	157	163											
		MBh	37.0	37.5	38.6	40.2	36.7	37.2	38.3	39.9	35.8	36.3	37.4	39.0	34.2	34.7	35.7	37.4	32.2	32.7	33.8	35.4	30.4	30.9	32.0	33.6											
		S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.89	0.75	0.61	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.84	0.71											
		ΔT	27	25	21	18	27	25	21	18	27	25	22	18	27	25	21	18	27	25	21	17	28	26	22	19											
1350	kW	2.18	2.18	2.17	2.19	2.45	2.44	2.44	2.46	2.74	2.74	2.74	2.76	3.06	3.06	3.06	3.08	3.42	3.42	3.41	3.43	3.84	3.84	3.83	3.85												
	Amps	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.4	14.0	14.0	14.0	14.1	15.9	15.9	15.9	16.0												
	HI PR	266	267	269	274	307	309	310	315	351	352	354	358	397	398	400	405	447	448	450	455	501	502	504	508												
	LO PR	124	125	128	133	131	133	136	141	138	139	142	147	143	144	147	153	148	150	153	158	155	156	159	164												
	MBh	37.8	38.3	39.4	41.0	37.5	38.0	39.1	40.7	36.5	37.1	38.1	39.8	34.9	35.4	36.5	38.1	33.0	33.5	34.5	36.2	31.2	31.7	32.8	34.4												
85	1070	S/T	1.00	0.87	0.73	0.60	1.00	0.87	0.74	0.60	1.00	0.90	0.77	0.63	1.00	1.00	0.78	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.86	0.72											
		ΔT	26	24	20	17	26	24	20	17	26	24	21	17	26	24	20	17	26	24	20	16	27	25	21	18											
		kW	2.19	2.19	2.19	2.21	2.46	2.46	2.45	2.47	2.75	2.75	2.75	2.77	3.07	3.07	3.07	3.09	3.43	3.43	3.42	3.44	3.85	3.85	3.84	3.86											
		Amps	8.4	8.4	8.4	8.4	9.6	9.6	9.6	9.7	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.5	14.0	14.0	14.0	14.1	16.0	16.0	15.9	16.0											
		HI PR	269	270	272	276	310	311	313	317	353	354	356	361	400	401	403	407	450	451	453	457	503	504	506	511											
	1200	LO PR	126	128	131	136	134	135	138	143	140	142	145	150	145	147	150	155	151	152	155	160	157	159	162	167											
		MBh	37.1	37.6	38.7	40.3	36.8	37.3	38.3	40.0	35.8	36.3	37.4	39.0	34.2	34.7	35.8	37.4	32.3	32.8	33.8	35.5	30.5	31.0	32.0	33.7											
		S/T	1.00	0.92	0.79	0.65	1.00	0.93	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77											
		ΔT	32	30	26	22	32	30	26	22	32	30	26	23	31	30	26	22	31	29	26	22	32	31	27	23											
		kW	2.17	2.17	2.17	2.19	2.44	2.44	2.43	2.45	2.74	2.73	2.73	2.75	3.06	3.05	3.05	3.07	3.41	3.41	3.41	3.43	3.83	3.83	3.83	3.85											
1350	Amps	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.6	10.9	10.9	10.8	10.9	12.3	12.3	12.3	12.4	14.0	14.0	13.9	14.0	15.9	15.9	15.9	16.0												
	HI PR	265	266	268	273	307	308	310	314	350	351	353	357	396	397	399	404	446	448	449	454	500	501	503	507												
	LO PR	124	125	128	133	131	133	136	141	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164												
	MBh	37.6	38.1	39.2	40.8	37.3	37.8	38.9	40.5	36.4	36.9	38.0	39.6	34.8	35.3	36.4	38.0	32.8	33.3	34.4	36.0	31.0	31.5	32.6	34.2												
	S/T	1.00	0.95	0.82	0.68	1.00	0.96	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.75	1.00	1.00	1.00	0.80												
1350	ΔT	31	29	25	21	31	29	25	21	31	29	25	22	31	29	25	21	30	28	25	21	31	30	26	22												
	kW	2.19	2.18	2.18	2.20	2.45	2.45	2.44	2.46	2.75	2.74	2.74	2.76	3.07	3.06	3.06	3.08	3.42	3.42	3.42	3.44	3.84	3.84	3.84	3.86												
	Amps	8.4	8.3	8.3	8.4	9.6	9.6	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.4	14.0	14.0	14.0	14.1	15.9	15.9	15.9	16.0												
	HI PR	267	269	270	275	309	310	312	316	352	353	355	359	398	399	401	406	448	450	451	456	502	503	505	509												
	LO PR	126	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	151	155	160	157	158	161	166												
1350	MBh	38.4	38.9	40.0	41.6	38.1	38.6	39.7	41.3	37.2	37.7	38.7	40.4	35.5	36.0	37.1	38.8	33.6	34.1	35.2	36.8	31.8	32.3	33.4	35.0												
	S/T	1.00	0.97	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.77	1.00	1.00	1.00	0.82												
	ΔT	30	28	24	21	30	28	24	20	30	28	24	21	30	28	24	20	29	27	24	20	31	29	25	21												
	kW	2.20	2.20	2.19	2.21	2.46	2.46	2.46	2.48	2.76	2.76	2.75	2.77	3.08	3.08	3.07	3.09	3.44	3.43	3.43	3.45	3.86	3.85	3.85	3.87												
	Amps	8.4	8.4	8.4	8.5	9.6	9.6	9.6	9.7	11.0	11.0	10.9	11.0	12.4	12.4	12.4	12.5	14.1	14.1	14.0	14.1	16.0	16.0	16.0	16.1												
1350	HI PR	270	271	273	277	311	312	314	319	354	355	357	362	401	402	404	408	451	452	454	458	504	506	507	512												
	LO PR	128	130	133	138	135	137	140	145	142	143	146	151	147	149	152	157	153	154	157	162	159	161	164	169												

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
		AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	1300	MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-					
		S/T	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.69	0.62	0.48	-	1.00	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-					
		ΔT	18	17	13	-	18	16	13	-	19	17	13	-	18	16	13	-	18	16	13	-	19	17	14	-					
		kW	2.44	2.44	2.44	-	2.72	2.72	2.72	-	3.03	3.03	3.03	-	3.37	3.37	3.36	-	3.74	3.74	3.73	-	4.18	4.18	4.17	-					
		Amps	9.0	9.0	8.9	-	10.2	10.2	10.2	-	11.7	11.6	11.6	-	13.2	13.2	13.2	-	14.9	14.9	14.9	-	16.9	16.9	16.9	-					
		HI PR	254	255	257	-	294	295	297	-	335	337	338	-	380	381	383	-	429	430	431	-	480	481	483	-					
	LO PR	124	125	129	-	131	133	136	-	138	139	143	-	143	145	148	-	149	150	153	-	156	157	160	-						
	1400	MBh	40.6	41.1	42.3	-	40.2	40.8	42.0	-	39.2	39.7	40.9	-	37.4	38.0	39.1	-	35.2	35.8	37.0	-	33.2	33.8	35.0	-					
		S/T	0.69	0.61	0.48	-	0.69	0.62	0.48	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-					
		ΔT	18	16	13	-	18	16	13	-	18	16	13	-	17	15	12	-	17	16	12	-	19	17	13	-					
		kW	2.45	2.45	2.45	-	2.73	2.73	2.72	-	3.04	3.04	3.03	-	3.37	3.37	3.37	-	3.75	3.75	3.74	-	4.19	4.19	4.18	-					
		Amps	9.0	9.0	9.0	-	10.3	10.3	10.2	-	11.7	11.7	11.7	-	13.2	13.2	13.2	-	14.9	14.9	14.9	-	17.0	16.9	16.9	-					
HI PR		255	256	258	-	295	296	298	-	337	338	340	-	382	383	384	-	430	431	433	-	481	483	484	-						
LO PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	161	-							
1575	MBh	41.3	41.9	43.1	-	41.0	41.5	42.7	-	39.9	40.5	41.7	-	38.2	38.7	39.9	-	36.0	36.5	37.7	-	34.0	34.6	35.7	-						
	S/T	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.70	0.57	-	1.00	0.75	0.62	-						
	ΔT	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	11	-	18	16	13	-						
	kW	2.46	2.46	2.46	-	2.74	2.74	2.74	-	3.05	3.05	3.04	-	3.39	3.38	3.38	-	3.76	3.76	3.75	-	4.20	4.20	4.19	-						
	Amps	9.1	9.0	9.0	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	13.3	13.3	13.2	-	15.0	15.0	15.0	-	17.0	17.0	17.0	-						
	HI PR	258	259	260	-	297	298	300	-	339	340	342	-	384	385	387	-	432	433	435	-	484	485	487	-						
LO PR	127	129	132	-	135	136	140	-	141	143	146	-	147	148	152	-	152	154	157	-	159	161	164	-							
75	1300	MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4					
		S/T	0.79	0.72	0.58	0.44	0.80	0.72	0.59	0.44	1.00	0.75	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.81	0.68	0.53	1.00	1.00	0.70	0.56					
		ΔT	22	20	17	14	22	20	17	14	22	21	17	14	22	20	17	14	22	20	17	13	23	21	18	14					
		kW	2.44	2.44	2.44	2.46	2.72	2.72	2.71	2.73	3.03	3.03	3.02	3.04	3.37	3.36	3.36	3.38	3.74	3.74	3.73	3.75	4.18	4.18	4.17	4.19					
		Amps	9.0	9.0	8.9	9.0	10.2	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0					
		HI PR	254	255	257	261	294	295	297	301	336	337	338	343	380	382	383	388	429	430	432	436	480	481	483	488					
	LO PR	124	126	129	134	131	133	136	141	138	139	143	148	143	145	148	153	149	150	153	159	156	157	160	165						
	1400	MBh	40.6	41.2	42.3	44.2	40.2	40.8	42.0	43.8	39.2	39.8	40.9	42.8	37.4	38.0	39.2	41.0	35.2	35.8	37.0	38.8	33.3	33.8	35.0	36.8					
		S/T	0.82	0.74	0.60	0.46	0.82	0.75	0.61	0.47	1.00	0.77	0.64	0.49	1.00	0.79	0.65	0.51	1.00	0.81	0.68	0.53	1.00	1.00	0.73	0.59					
		ΔT	22	20	17	13	22	20	16	13	22	20	17	13	22	20	16	13	21	20	16	13	22	21	17	14					
		kW	2.45	2.45	2.44	2.47	2.73	2.73	2.72	2.74	3.04	3.04	3.03	3.05	3.37	3.37	3.37	3.39	3.75	3.75	3.74	3.76	4.19	4.18	4.18	4.20					
		Amps	9.0	9.0	9.0	9.1	10.3	10.3	10.2	10.3	11.7	11.7	11.7	11.7	13.2	13.2	13.2	13.3	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0					
HI PR		256	257	258	263	295	296	298	303	337	338	340	344	382	383	385	389	430	431	433	437	482	483	485	489						
LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	152	155	160	157	158	161	167							
1575	MBh	41.4	41.9	43.1	44.9	41.0	41.6	42.7	44.6	40.0	40.5	41.7	43.5	38.2	38.7	39.9	41.7	36.0	36.6	37.7	39.6	34.0	34.6	35.8	37.6						
	S/T	0.84	0.76	0.62	0.48	1.00	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	0.81	0.68	0.53	1.00	0.83	0.70	0.55	1.00	1.00	0.75	0.61						
	ΔT	21	19	16	12	21	19	16	12	21	19	16	12	21	19	16	12	20	19	15	12	22	20	16	13						
	kW	2.46	2.46	2.46	2.48	2.74	2.74	2.73	2.75	3.05	3.05	3.04	3.06	3.39	3.38	3.38	3.40	3.76	3.76	3.75	3.77	4.20	4.20	4.19	4.21						
	Amps	9.1	9.0	9.0	9.1	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	13.3	13.3	13.2	13.3	15.0	15.0	15.0	15.1	17.0	17.0	17.0	17.1						
	HI PR	258	259	261	265	298	299	300	305	339	340	342	346	384	385	387	391	432	433	435	440	484	485	487	491						
LO PR	128	129	132	137	135	136	140	145	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169							

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
<b>80</b>	AIRFLOW	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6	
		S/T	1.00	0.84	0.71	0.56	1.00	0.85	0.71	0.57	1.00	0.87	0.74	0.59	1.00	1.00	0.76	0.61	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69	
	<b>1300</b>	ΔT	26	24	21	18	26	24	21	18	26	25	21	18	26	24	21	18	26	24	21	17	27	25	22	18	
		kW	2.44	2.44	2.44	2.46	2.72	2.72	2.72	2.74	3.03	3.03	3.02	3.05	3.37	3.36	3.36	3.38	3.74	3.74	3.73	3.76	4.18	4.18	4.17	4.20	
	Amps	9.0	9.0	8.9	9.0	10.2	10.2	10.2	10.3	11.7	11.6	11.6	11.7	13.2	13.2	13.2	13.3	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0		
		HI PR	255	256	258	262	294	296	297	302	336	337	339	343	381	382	382	388	429	430	432	437	481	482	484	488	
	LO PR	125	126	129	134	132	133	137	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166		
		MBh	40.8	41.4	42.5	44.4	40.4	41.0	42.2	44.0	39.4	40.0	41.2	43.0	37.6	38.2	39.4	41.2	35.4	36.0	37.2	39.0	33.5	34.0	35.2	37.0	
	<b>85</b>	AIRFLOW	S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.59	1.00	0.90	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.85	0.71
			ΔT	26	24	21	17	26	24	20	17	26	24	21	17	26	24	20	17	25	24	20	17	26	25	21	18
<b>1400</b>		kW	2.45	2.45	2.45	2.47	2.73	2.73	2.72	2.74	3.04	3.04	3.03	3.05	3.37	3.37	3.37	3.39	3.75	3.75	3.74	3.76	4.19	4.19	4.18	4.20	
		Amps	9.0	9.0	9.0	9.1	10.3	10.3	10.2	10.3	11.7	11.7	11.7	11.8	13.2	13.2	13.2	13.3	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	
HI PR		256	257	259	263	296	297	299	303	337	338	340	345	382	383	385	389	431	432	433	438	482	483	485	489		
		LO PR	126	127	130	136	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	160	157	159	162	167	
AIRFLOW		MBh	41.6	42.1	43.3	45.1	41.2	41.8	43.0	44.8	40.2	40.7	41.9	43.7	38.4	38.9	40.1	41.9	36.2	36.8	38.0	39.8	34.2	34.8	36.0	37.8	
		S/T	1.00	0.88	0.75	0.61	1.00	0.89	0.76	0.61	1.00	0.92	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.87	0.73	
<b>1300</b>		AIRFLOW	ΔT	25	23	20	16	25	23	20	16	25	23	20	16	25	23	20	16	24	23	19	16	26	24	20	17
			kW	2.46	2.46	2.46	2.48	2.74	2.74	2.73	2.76	3.05	3.05	3.04	3.07	3.39	3.38	3.38	3.40	3.76	3.76	3.75	3.78	4.20	4.20	4.19	4.21
	Amps	9.1	9.0	9.0	9.1	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	13.3	13.3	13.2	13.3	15.0	15.0	15.0	15.1	17.0	17.0	17.0	17.1		
		HI PR	258	259	261	266	298	299	301	305	340	341	342	347	384	386	387	392	433	434	436	440	484	485	487	492	
	LO PR	128	130	133	138	135	137	140	145	142	144	147	152	148	149	152	157	153	154	158	163	160	161	164	169		
		MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3	
	<b>1400</b>	AIRFLOW	S/T	1.00	0.94	0.81	0.66	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.71	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.81
			ΔT	29	27	24	21	29	27	24	21	29	28	25	21	29	27	24	20	29	27	24	20	30	28	25	21
		Amps	2.45	2.45	2.44	2.46	2.73	2.73	2.72	2.74	3.04	3.03	3.03	3.05	3.37	3.37	3.37	3.39	3.75	3.74	3.74	3.76	4.19	4.18	4.18	4.20	
			HI PR	256	257	259	263	296	297	299	303	337	338	340	345	382	383	385	389	430	432	433	438	482	483	485	489
LO PR		126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	163	168		
		MBh	41.5	42.0	43.2	45.0	41.1	41.7	42.9	44.7	40.1	40.6	41.8	43.6	38.3	38.9	40.0	41.9	36.1	36.7	37.9	39.7	34.1	34.7	35.9	37.7	
<b>1575</b>		AIRFLOW	S/T	1.00	0.97	0.83	0.69	1.00	1.00	0.84	0.69	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	1.00	0.81
			ΔT	29	27	24	21	29	27	24	21	29	28	24	21	29	27	24	20	29	27	24	20	30	28	25	21
		Amps	2.46	2.46	2.45	2.47	2.74	2.73	2.73	2.75	3.04	3.04	3.04	3.06	3.38	3.38	3.37	3.39	3.75	3.75	3.75	3.77	4.19	4.19	4.19	4.21	
			HI PR	257	258	260	264	297	298	300	304	339	340	341	346	383	384	386	391	432	433	435	439	483	484	486	491
	LO PR	128	129	132	137	135	137	140	145	142	143	146	151	147	149	152	157	152	154	157	162	159	161	164	169		
		MBh	42.2	42.8	44.0	45.8	41.9	42.4	43.6	45.4	40.8	41.4	42.6	44.4	39.1	39.6	40.8	42.6	36.9	37.4	38.6	40.4	34.9	35.4	36.6	38.4	
	<b>1575</b>	AIRFLOW	S/T	1.00	0.99	0.85	0.71	1.00	1.00	0.86	0.71	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	1.00	0.83
			ΔT	28	26	23	20	28	26	23	20	28	27	23	20	28	26	23	20	28	26	23	19	29	27	24	20
		Amps	2.47	2.47	2.46	2.48	2.75	2.74	2.74	2.76	3.06	3.05	3.05	3.07	3.39	3.39	3.38	3.41	3.77	3.76	3.76	3.78	4.21	4.20	4.20	4.22	
			HI PR	259	261	262	267	299	300	302	306	341	342	344	348	386	387	389	393	434	435	437	441	486	487	488	493
LO PR		130	131	135	140	137	139	142	147	144	145	148	154	149	151	154	159	155	156	159	165	162	163	166	171		
		MBh	42.2	42.8	44.0	45.8	41.9	42.4	43.6	45.4	40.8	41.4	42.6	44.4	39.1	39.6	40.8	42.6	36.9	37.4	38.6	40.4	34.9	35.4	36.6	38.4	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.9	46.5	47.9	-	45.5	46.1	47.5	-	44.3	44.9	46.3	-	42.2	42.9	44.2	-	39.7	40.4	41.7	-	37.4	38.1	39.4	-
	S/T	0.64	0.56	0.42	-	0.65	0.57	0.43	-	0.67	0.59	0.45	-	0.69	0.61	0.47	-	1.00	0.64	0.50	-	1.00	0.69	0.55	-
	ΔT	1.9	1.7	1.4	-	1.9	1.7	1.4	-	1.9	1.7	1.4	-	1.9	1.7	1.4	-	1.9	1.7	1.4	-	2.0	1.8	1.5	-
	kW	2.79	2.78	2.78	-	3.11	3.10	3.10	-	3.46	3.46	3.46	-	3.85	3.85	3.84	-	4.28	4.28	4.28	-	4.79	4.79	4.78	-
	Amps	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.1	15.0	-	17.1	17.0	17.0	-	19.4	19.4	19.3	-
	HI PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	387	-	433	434	436	-	485	486	488	-
LO PR	122	124	127	-	130	131	134	-	136	138	141	-	142	143	146	-	147	149	152	-	154	156	159	-	
1400	MBh	46.4	47.0	48.4	-	46.0	46.6	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.7	-	40.2	40.9	42.2	-	37.9	38.6	39.9	-
	S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.54	-	1.00	0.74	0.60	-
	ΔT	1.8	1.6	1.3	-	1.8	1.6	1.3	-	1.8	1.6	1.3	-	1.8	1.6	1.3	-	1.8	1.6	1.3	-	1.9	1.7	1.4	-
	kW	2.80	2.80	2.79	-	3.12	3.12	3.11	-	3.48	3.48	3.47	-	3.87	3.86	3.86	-	4.30	4.30	4.29	-	4.80	4.80	4.80	-
	Amps	10.3	10.3	10.2	-	11.7	11.7	11.7	-	13.4	13.4	13.3	-	15.1	15.1	15.1	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-
	HI PR	258	259	260	-	298	299	301	-	340	341	343	-	386	387	388	-	435	436	437	-	487	488	490	-
LO PR	124	125	129	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-	
1800	MBh	47.3	47.9	49.3	-	46.9	47.5	48.9	-	45.7	46.3	47.7	-	43.6	44.3	45.6	-	41.1	41.8	43.1	-	38.8	39.5	40.8	-
	S/T	0.73	0.65	0.51	-	0.73	0.66	0.52	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.64	-
	ΔT	1.7	1.5	1.2	-	1.7	1.5	1.2	-	1.7	1.5	1.2	-	1.7	1.5	1.2	-	1.7	1.5	1.2	-	1.8	1.6	1.3	-
	kW	2.82	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.88	3.88	3.87	-	4.31	4.31	4.31	-	4.82	4.82	4.81	-
	Amps	10.3	10.3	10.3	-	11.8	11.8	11.8	-	13.4	13.4	13.4	-	15.2	15.2	15.2	-	17.2	17.2	17.2	-	19.5	19.5	19.5	-
	HI PR	260	261	263	-	300	302	303	-	343	344	346	-	388	389	391	-	437	438	440	-	489	491	492	-
LO PR	126	128	131	-	134	135	138	-	140	142	145	-	146	147	150	-	151	153	156	-	158	159	163	-	

1400	MBh	45.9	46.6	47.9	50.0	45.5	46.1	47.5	49.6	44.3	45.0	46.3	48.4	42.2	42.9	44.3	46.4	39.7	40.4	41.7	43.8	37.4	38.1	39.5	41.5
	S/T	0.77	0.69	0.55	0.41	0.78	0.70	0.56	0.41	1.00	0.73	0.59	0.44	1.00	0.75	0.61	0.46	1.00	0.77	0.63	0.48	1.00	1.00	0.68	0.54
	ΔT	2.3	2.1	1.8	1.4	2.3	2.1	1.8	1.4	2.3	2.1	1.8	1.4	2.3	2.1	1.8	1.4	2.2	2.1	1.7	1.4	2.4	2.2	1.9	1.5
	kW	2.79	2.78	2.78	2.80	3.11	3.10	3.10	3.12	3.46	3.46	3.45	3.48	3.85	3.85	3.84	3.87	4.28	4.28	4.27	4.30	4.79	4.79	4.78	4.81
	Amps	10.2	10.2	10.2	10.3	11.7	11.6	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.1	15.0	15.1	17.0	17.0	17.0	17.1	19.4	19.4	19.3	19.4
	HI PR	256	257	259	263	296	297	299	304	339	340	341	346	384	385	387	391	433	434	436	440	485	486	488	493
LO PR	122	124	127	132	130	131	134	140	136	138	141	146	142	143	146	152	147	149	152	157	154	156	159	164	
1560	MBh	46.4	47.1	48.4	50.5	46.0	46.6	48.0	50.1	44.8	45.5	46.8	48.9	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.3	37.9	38.6	40.0	42.0
	S/T	0.82	0.74	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.58
	ΔT	2.2	2.0	1.7	1.3	2.2	2.0	1.7	1.3	2.2	2.0	1.7	1.4	2.2	2.0	1.7	1.3	2.2	2.0	1.7	1.3	2.3	2.1	1.8	1.4
	kW	2.80	2.80	2.79	2.81	3.12	3.12	3.11	3.14	3.48	3.47	3.47	3.49	3.86	3.86	3.86	3.88	4.30	4.29	4.29	4.31	4.80	4.80	4.79	4.82
	Amps	10.3	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.4	13.3	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5
	HI PR	258	259	261	265	298	299	301	305	340	341	343	348	386	387	389	393	435	436	438	442	487	488	490	494
LO PR	124	125	129	134	131	133	136	141	138	139	142	148	143	145	148	153	149	150	153	159	156	157	160	165	
1800	MBh	47.3	48.0	49.3	51.4	46.9	47.6	48.9	51.0	45.7	46.4	47.7	49.8	43.7	44.3	45.7	47.8	41.1	41.8	43.2	45.2	38.8	39.5	40.9	43.0
	S/T	0.86	0.78	0.64	0.50	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62
	ΔT	2.1	1.9	1.6	1.2	2.1	1.9	1.6	1.2	2.1	1.9	1.6	1.3	2.1	1.9	1.6	1.2	2.1	1.9	1.5	1.2	2.2	2.0	1.7	1.3
	kW	2.82	2.81	2.81	2.83	3.14	3.13	3.13	3.15	3.49	3.49	3.49	3.51	3.88	3.88	3.87	3.90	4.31	4.31	4.30	4.33	4.82	4.82	4.81	4.84
	Amps	10.3	10.3	10.3	10.4	11.8	11.8	11.8	11.9	13.4	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.1	17.3	19.5	19.5	19.5	19.6
	HI PR	260	261	263	268	301	302	304	308	343	344	346	350	388	389	391	396	437	438	440	445	490	491	493	497
LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	163	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)



IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1400	MBh	46.1	46.8	48.2	50.2	45.7	46.4	47.8	49.8	44.5	45.2	46.6	48.6	42.5	43.1	44.5	46.6	40.0	40.6	42.0	44.1	37.7	38.3	39.7	41.8
		S/T	1.00	0.82	0.68	0.54	1.00	0.83	0.69	0.54	1.00	0.86	0.72	0.57	1.00	0.88	0.74	0.59	1.00	1.00	0.76	0.61	1.00	1.00	0.81	0.66
	Delta T	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	26	25	21	18	27	26	22	19	
	KW	2.79	2.78	2.78	2.80	3.11	3.10	3.10	3.12	3.46	3.46	3.46	3.48	3.85	3.85	3.84	3.87	4.28	4.28	4.28	4.30	4.79	4.79	4.78	4.81	
	AMPS	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.1	15.0	15.1	17.1	17.0	17.0	17.1	19.4	19.4	19.3	19.4	
	HI PR	256	258	259	264	297	298	300	304	339	340	342	346	384	386	387	392	433	435	436	441	486	487	489	493	
	LO PR	123	124	128	133	130	132	135	140	137	138	142	147	142	144	147	152	148	149	152	158	155	156	159	164	
	1560	MBh	46.6	47.3	48.7	50.8	46.2	46.9	48.3	50.3	45.0	45.7	47.1	49.1	43.0	43.6	45.0	47.1	40.5	41.1	42.5	44.6	38.2	38.8	40.2	42.3
		S/T	1.00	0.87	0.73	0.59	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.86	0.71
	Delta T	26	24	21	17	26	24	21	17	26	24	21	18	26	24	21	17	26	24	20	17	27	25	22	18	
KW	2.80	2.80	2.79	2.82	3.12	3.12	3.11	3.14	3.48	3.48	3.47	3.49	3.86	3.86	3.86	3.88	4.30	4.29	4.29	4.31	4.80	4.80	4.80	4.82		
AMPS	10.3	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.4	13.4	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5		
HI PR	258	259	261	266	299	300	301	306	341	342	344	348	386	387	389	394	435	436	438	443	488	489	490	495		
LO PR	124	126	129	134	132	133	136	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166		
1800	MBh	47.6	48.2	49.6	51.7	47.1	47.8	49.2	51.2	46.0	46.6	48.0	50.1	43.9	44.5	45.9	48.0	41.4	42.0	43.4	45.5	39.1	39.7	41.1	43.2	
	S/T	1.00	0.91	0.77	0.62	1.00	0.92	0.78	0.63	1.00	0.95	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.85	0.70	1.00	1.00	0.90	0.75	
Delta T	25	23	20	16	25	23	20	16	25	23	20	16	25	23	20	16	24	23	19	16	26	24	20	17		
KW	2.82	2.81	2.81	2.83	3.14	3.13	3.13	3.15	3.49	3.49	3.49	3.51	3.88	3.88	3.87	3.90	4.31	4.31	4.31	4.33	4.82	4.82	4.81	4.84		
AMPS	10.3	10.3	10.3	10.4	11.8	11.8	11.8	11.9	13.4	13.4	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.3	19.5	19.5	19.5	19.6		
HI PR	261	262	264	268	301	302	304	308	343	344	346	351	389	390	392	396	438	439	441	445	490	491	493	498		
LO PR	127	128	132	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168		
85	1400	MBh	46.9	47.6	48.9	51.0	46.5	47.2	48.5	50.6	45.3	46.0	47.3	49.4	43.3	43.9	45.3	47.4	40.7	41.4	42.8	44.8	38.4	39.1	40.5	42.6
		S/T	1.00	0.93	0.79	0.64	1.00	0.94	0.80	0.65	1.00	1.00	0.82	0.67	1.00	1.00	0.84	0.69	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
	Delta T	30	28	25	22	30	28	25	22	30	29	25	22	30	28	25	21	30	28	25	21	31	29	26	22	
	KW	2.79	2.79	2.78	2.81	3.11	3.11	3.11	3.13	3.47	3.47	3.46	3.49	3.86	3.86	3.85	3.87	4.29	4.29	4.28	4.31	4.80	4.79	4.79	4.81	
	AMPS	10.2	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.3	13.3	13.3	13.4	15.1	15.1	15.1	15.2	17.1	17.1	17.0	17.2	19.4	19.4	19.4	19.5	
	HI PR	258	259	261	265	298	299	301	305	340	341	343	348	386	387	389	393	435	436	438	442	487	488	490	494	
	LO PR	125	126	129	135	132	134	137	142	139	140	143	149	144	146	149	154	150	151	154	159	156	158	161	166	
	1560	MBh	47.4	48.1	49.4	51.5	47.0	47.7	49.0	51.1	45.8	46.5	47.8	49.9	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.3	38.9	39.6	41.0	43.1
		S/T	1.00	0.98	0.84	0.69	1.00	0.98	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.77	1.00	1.00	1.00	0.82
	Delta T	29	28	24	21	29	27	24	21	30	28	24	21	29	27	24	21	29	27	24	21	30	28	25	22	
KW	2.81	2.80	2.80	2.82	3.13	3.12	3.12	3.14	3.48	3.48	3.48	3.50	3.87	3.87	3.86	3.89	4.30	4.30	4.30	4.32	4.81	4.81	4.80	4.83		
AMPS	10.3	10.3	10.3	10.4	11.8	11.7	11.7	11.8	13.4	13.4	13.4	13.5	15.2	15.2	15.1	15.2	17.1	17.1	17.1	17.2	19.5	19.5	19.4	19.5		
HI PR	259	261	262	267	300	301	303	307	342	343	345	349	387	389	390	395	436	438	439	444	489	490	492	496		
LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	162	168		
1800	MBh	48.3	49.0	50.3	52.4	47.9	48.6	49.9	52.0	46.7	47.4	48.7	50.8	44.7	45.3	46.7	48.8	42.2	42.8	44.2	46.3	39.9	40.5	41.9	44.0	
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.95	0.80	1.00	1.00	1.00	0.86	
Delta T	28	26	23	20	28	26	23	20	28	27	23	20	28	26	23	20	28	26	23	19	29	27	24	21		
KW	2.82	2.82	2.82	2.84	3.14	3.14	3.14	3.16	3.50	3.50	3.49	3.52	3.89	3.89	3.88	3.90	4.32	4.32	4.31	4.34	4.83	4.82	4.82	4.84		
AMPS	10.4	10.4	10.3	10.4	11.8	11.8	11.8	11.9	13.5	13.5	13.4	13.5	15.2	15.2	15.2	15.3	17.2	17.2	17.2	17.3	19.5	19.5	19.5	19.6		
HI PR	262	263	265	269	302	303	305	310	345	346	347	352	390	391	393	397	439	440	442	446	491	492	494	499		
LO PR	129	130	133	139	136	138	141	146	143	144	147	153	148	150	153	158	154	155	158	163	160	162	165	170		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)





IDB		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																			
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79																																																																																																																																																																																																																																																																																																																																																																																																														
		ENTERING INDOOR WET BULB TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127																																																																																																																																																																																																																																																																																																																																						
1400	AIRFLOW	46.1	46.8	48.1	50.2	45.7	46.4	47.7	49.8	44.5	45.2	46.5	48.6	42.5	43.1	44.5	46.6	40.0	40.7	42.0	44.1	37.8	38.4	39.7	41.8	0.91	0.84	0.70	0.56	1.00	0.84	0.71	0.57	1.00	0.87	0.73	0.59	1.00	0.89	0.75	0.61	1.00	1.00	0.78	0.63	1.00	1.00	0.83	0.69	2.69	2.69	2.69	2.71	3.01	3.01	3.00	3.02	3.36	3.36	3.35	3.37	3.74	3.74	3.74	3.75	4.16	4.16	4.16	4.15	4.18	4.66	4.66	4.65	4.68	9.9	9.9	9.8	9.9	11.3	11.3	11.3	11.4	12.9	12.9	12.9	13.0	14.7	14.6	14.6	14.7	16.6	16.6	16.6	16.6	16.6	18.9	18.9	18.8	18.9	249	250	252	257	288	289	291	295	329	330	332	336	373	374	376	380	420	421	423	427	471	472	474	478	121	123	126	131	128	130	133	138	135	136	139	144	140	142	145	150	145	147	150	155	152	153	156	162	47.0	47.6	48.9	51.0	46.6	47.2	48.5	50.6	45.4	46.0	47.4	49.4	43.3	44.0	45.3	47.4	40.8	41.5	42.8	44.9	38.6	39.2	40.6	42.6	1.00	0.88	0.74	0.60	1.00	0.88	0.75	0.60	1.00	0.91	0.77	0.63	1.00	0.93	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.86	0.72	2.71	2.71	2.70	2.72	3.02	3.02	3.02	3.04	3.37	3.37	3.37	3.39	3.75	3.75	3.75	3.77	4.18	4.18	4.17	4.17	4.68	4.67	4.67	4.69	9.9	9.9	9.9	10.0	11.4	11.4	11.4	11.5	13.0	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.7	16.6	18.9	18.9	18.9	19.0	252	253	255	259	291	292	293	298	331	333	334	339	375	376	378	382	423	424	426	430	473	474	476	480	123	125	128	133	131	132	135	140	137	138	142	147	142	144	147	152	148	149	152	157	154	156	159	164	48.0	48.6	50.0	52.0	47.6	48.2	49.6	51.6	46.4	47.0	48.4	50.4	44.4	45.0	46.3	48.4	41.9	42.5	43.9	45.9	39.6	40.2	41.6	43.7	1.00	0.88	0.75	0.61	1.00	0.89	0.75	0.61	1.00	0.91	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.87	0.73	2.72	2.72	2.71	2.74	3.04	3.03	3.03	3.05	3.39	3.39	3.38	3.40	3.77	3.76	3.76	3.78	4.19	4.19	4.18	4.21	4.69	4.69	4.68	4.71	10.0	10.0	10.0	10.1	11.4	11.4	11.4	11.5	13.1	13.0	13.0	13.1	14.8	14.8	14.8	14.9	16.7	16.7	16.7	16.8	19.0	19.0	19.0	19.1	254	255	257	261	293	294	296	300	334	335	337	341	378	379	381	385	425	426	428	432	476	477	478	483	126	128	131	136	133	135	138	143	140	141	144	149	145	146	149	155	150	152	155	160	157	158	161	166
1800	AIRFLOW	46.9	47.5	48.9	50.9	46.5	47.1	48.5	50.5	45.3	45.9	47.3	49.4	43.3	43.9	45.3	47.3	40.8	41.4	42.8	44.8	38.5	39.2	40.5	42.6	1.00	0.94	0.80	0.66	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.88	0.73	1.00	1.00	0.93	0.79	2.70	2.70	2.69	2.72	3.01	3.01	3.01	3.03	3.36	3.36	3.36	3.38	3.74	3.74	3.74	3.76	4.17	4.17	4.16	4.18	4.67	4.66	4.66	4.68	9.9	9.9	9.9	10.0	11.3	11.3	11.3	11.4	12.9	12.9	12.9	13.0	14.7	14.7	14.7	14.8	16.6	16.6	16.6	16.7	18.9	18.9	18.9	19.0	251	252	253	258	290	291	292	297	330	331	333	337	374	375	377	381	422	423	424	429	472	473	475	479	123	124	128	133	130	132	135	140	137	138	141	146	142	143	146	151	147	149	152	157	154	155	158	163	47.7	48.4	49.7	51.8	47.3	48.0	49.3	51.4	46.1	46.8	48.1	50.2	44.1	44.7	46.1	48.2	41.6	42.3	43.6	45.7	39.3	40.0	41.3	43.4	1.00	0.98	0.84	0.70	1.00	0.98	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.75	1.00	1.00	0.91	0.77	1.00	1.00	0.90	0.82	2.71	2.71	2.71	2.73	3.03	3.03	3.02	3.05	3.38	3.38	3.37	3.40	3.76	3.76	3.75	3.78	4.18	4.18	4.18	4.20	4.68	4.68	4.67	4.70	10.0	10.0	9.9	10.0	11.4	11.4	11.4	11.5	13.0	13.0	13.0	13.1	14.8	14.7	14.7	14.8	16.7	16.7	16.7	16.8	19.0	19.0	19.0	19.1	253	254	256	260	292	293	295	299	333	334	335	340	377	378	379	384	424	425	427	431	474	475	477	481	125	127	130	135	132	134	137	142	139	140	143	148	144	146	149	154	149	151	154	159	156	157	161	166	48.7	49.4	50.7	52.8	48.3	49.0	50.3	52.4	47.2	47.8	49.1	51.2	45.1	45.8	47.1	49.2	42.6	43.3	44.6	46.7	40.4	41.0	42.4	44.4	1.00	0.98	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	0.90	0.83	2.73	2.73	2.72	2.74	3.04	3.04	3.03	3.06	3.39	3.39	3.39	3.41	3.77	3.77	3.77	3.79	4.20	4.19	4.19	4.21	4.70	4.69	4.69	4.71	10.0	10.0	10.0	10.1	11.5	11.5	11.4	11.5	13.1	13.1	13.0	13.2	14.8	14.8	14.8	14.9	16.8	16.7	16.7	16.8	19.0	19.0	19.0	19.1	255	256	258	262	294	295	297	301	335	336	338	342	379	380	382	386	426	427	429	433	477	478	480	484	128	129	132	137	135	137	140	145	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	168		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71						
70	1790	MBh	58.2	59.0	60.8	-	57.7	58.5	60.3	-	56.2	57.0	58.8	-	53.6	54.5	56.2	-	50.5	51.3	53.0	-	47.6	48.4	50.1	-	47.6	48.4	50.1	-	47.6	48.4	50.1	-			
		S/T	0.67	0.59	0.46	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	0.74	0.67	0.53	-	1.00	0.72	0.58	-	1.00	0.72	0.58	-	1.00	0.72	0.58	-			
		ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-			
		kW	3.35	3.35	3.34	-	3.78	3.78	3.77	-	4.25	4.25	4.24	-	4.76	4.76	4.75	-	5.34	5.33	5.33	-	6.01	6.00	6.00	-	6.01	6.00	6.00	-	6.01	6.00	6.00	-			
		Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.2	-	19.6	19.6	19.6	-	22.2	22.2	22.2	-	25.3	25.3	25.3	-	25.3	25.3	25.3	-	25.3	25.3	25.3	-			
	HI PR	258	259	261	-	298	299	301	-	340	341	343	-	386	387	389	-	435	436	438	-	487	488	490	-	487	488	490	-	487	488	490	-				
	LO PR	116	118	121	-	123	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	150	-	146	148	150	-	146	148	150	-				
	MBh	59.1	59.9	61.6	-	58.6	59.4	61.1	-	57.1	57.9	59.6	-	54.5	55.3	57.0	-	51.3	52.1	53.9	-	48.4	49.3	51.0	-	48.4	49.3	51.0	-	48.4	49.3	51.0	-				
	S/T	0.70	0.62	0.49	-	0.71	0.63	0.49	-	0.73	0.66	0.52	-	0.75	0.68	0.54	-	0.77	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.75	0.61	-	1.00	0.75	0.61	-				
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-	19	17	14	-				
kW	3.37	3.37	3.36	-	3.80	3.79	3.79	-	4.27	4.27	4.26	-	4.78	4.78	4.77	-	5.35	5.35	5.34	-	6.03	6.02	6.01	-	6.03	6.02	6.01	-	6.03	6.02	6.01	-					
Amps	13.2	13.2	13.2	-	15.2	15.2	15.1	-	17.4	17.3	17.3	-	19.7	19.7	19.6	-	22.3	22.3	22.3	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-					
HI PR	260	261	263	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	489	490	492	-	489	490	492	-	489	490	492	-					
LO PR	118	120	123	-	125	127	130	-	131	133	136	-	136	138	141	-	142	143	146	-	148	149	152	-	148	149	152	-	148	149	152	-					
MBh	60.3	61.1	62.8	-	59.8	60.6	62.3	-	58.3	59.1	60.8	-	55.7	56.5	58.2	-	52.5	53.4	55.1	-	49.7	50.5	52.2	-	49.7	50.5	52.2	-	49.7	50.5	52.2	-					
S/T	0.71	0.64	0.50	-	0.72	0.64	0.51	-	0.75	0.67	0.53	-	0.76	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.63	-	1.00	0.76	0.63	-	1.00	0.76	0.63	-					
ΔT	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	11	-	18	16	13	-	18	16	13	-	18	16	13	-					
kW	3.39	3.39	3.38	-	3.81	3.81	3.80	-	4.29	4.28	4.28	-	4.80	4.80	4.79	-	5.37	5.37	5.36	-	6.04	6.04	6.03	-	6.04	6.04	6.03	-	6.04	6.04	6.03	-					
Amps	13.3	13.3	13.3	-	15.3	15.3	15.2	-	17.4	17.4	17.4	-	19.8	19.8	19.7	-	22.4	22.4	22.4	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-					
HI PR	262	263	265	-	302	303	305	-	345	346	347	-	390	391	393	-	439	440	442	-	491	492	494	-	491	492	494	-	491	492	494	-					
LO PR	121	122	125	-	128	129	132	-	134	135	138	-	139	140	143	-	144	145	148	-	150	152	155	-	150	152	155	-	150	152	155	-					

75	1790	MBh	58.3	59.1	60.8	63.4	57.8	58.6	60.3	62.9	56.3	57.1	58.8	61.4	53.7	54.5	56.2	58.8	50.5	51.3	53.0	55.7	47.6	48.4	50.2	52.8	47.6	48.4	50.2	52.8	47.6	48.4	50.2	52.8			
		S/T	0.80	0.72	0.59	0.44	0.80	0.73	0.59	0.45	0.83	0.75	0.62	0.47	1.00	0.77	0.64	0.49	1.00	0.81	0.67	0.53	1.00	0.88	0.74	0.60	1.00	0.88	0.74	0.60	1.00	0.88	0.74	0.60			
		ΔT	23	21	18	14	23	21	18	14	23	21	18	14	23	21	18	14	23	21	17	13	22	20	16	13	23	21	18	14	23	21	18	14			
		kW	3.35	3.35	3.34	3.37	3.78	3.77	3.77	3.80	4.25	4.25	4.24	4.27	4.76	4.76	4.75	4.78	5.33	5.33	5.32	5.36	6.01	6.00	5.99	6.03	6.01	6.00	5.99	6.03	6.01	6.00	5.99	6.03	6.01	6.00	
		Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.0	15.2	17.3	17.2	17.2	17.4	19.6	19.6	19.6	19.7	22.2	22.2	22.2	22.3	25.3	25.3	25.2	25.4	25.3	25.2	25.4	25.3	25.2	25.4	25.3	25.2	25.4		
	HI PR	258	259	261	265	298	299	301	306	340	341	343	348	386	387	389	393	435	436	438	442	487	488	490	495	487	488	490	495	487	488	490	495	487	488	490	495
	LO PR	116	118	121	126	123	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	150	155	146	148	150	155	146	148	150	155	146	148	150	155
	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.5	55.3	57.0	59.7	51.4	52.2	53.9	56.5	48.5	49.3	51.0	53.6	48.5	49.3	51.0	53.6	48.5	49.3	51.0	53.6	48.5	49.3	51.0	53.6
	S/T	0.83	0.75	0.62	0.47	0.84	0.76	0.62	0.48	0.86	0.79	0.65	0.51	1.00	0.81	0.67	0.53	1.00	0.83	0.69	0.55	1.00	0.88	0.74	0.60	1.00	0.88	0.74	0.60	1.00	0.88	0.74	0.60	1.00	0.88	0.74	0.60
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	22	20	16	13	23	21	18	14	23	21	18	14	23	21	18	14
kW	3.37	3.37	3.36	3.39	3.79	3.79	3.78	3.82	4.27	4.26	4.26	4.29	4.78	4.78	4.77	4.80	5.35	5.35	5.34	5.37	6.02	6.02	6.01	6.04	6.02	6.01	6.04	6.02	6.01	6.04	6.02	6.01	6.04	6.02	6.01	6.04	
Amps	13.2	13.2	13.2	13.3	15.2	15.2	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.6	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.3	25.5	25.4	25.3	25.5	25.4	25.3	25.5	25.4	25.3	25.5	25.4	25.3	25.5	
HI PR	260	261	263	267	300	301	303	307	342	343	345	350	388	389	391	395	437	438	440	444	489	490	492	497	489	490	492	497	489	490	492	497	489	490	492	497	
LO PR	118	120	123	127	125	127	130	134	131	133	136	141	136	138	141	146	142	143	146	151	148	149	152	157	148	149	152	157	148	149	152	157	148	149	152	157	
MBh	60.3	61.1	62.9	65.5	59.8	60.6	62.3	65.0	58.3	59.1	60.8	63.5	55.7	56.5	58.3	60.9	52.6	53.4	55.1	57.7	49.7	50.5	52.2	54.9	49.7	50.5	52.2	54.9	49.7	50.5	52.2	54.9	49.7	50.5	52.2	54.9	
S/T	0.84	0.77	0.63	0.49	0.85	0.77	0.64	0.49	1.00	0.80	0.66	0.52	1.00	0.82	0.68	0.54	1.00	0.84	0.70	0.56	1.00	0.89	0.76	0.61	1.00	0.89	0.76	0.61	1.00	0.89	0.76	0.61	1.00	0.89	0.76	0.61	
ΔT	21	19	16	12	21	19	16	12	21	20	16	12	21	19	16	12	21	19	16	12	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	
kW	3.39	3.38	3.38	3.41	3.81	3.81	3.80	3.83	4.29	4.28	4.27	4.31	4.80	4.79	4.79	4.82	5.37	5.37	5.36	5.39	6.04	6.04	6.03	6.06	6.04	6.03	6.06	6.04	6.03	6.06	6.04	6.03	6.06	6.04	6.03	6.06	
Amps	13.3	13.3	13.3	13.4	15.3	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.7	19.9	22.4	22.4	22.3	22.5	25.5	25.4	25.4	25.6	25.5	25.4	25.6	25.5	25.4	25.6	25.5	25.4	25.6	25.5	25.4	25.6	
HI PR	262	263	265	270	303	304	305	310	345	346	348	352	390	391	393	398	439	440	442	447	492	493	495	499	492	493	495	499	492	493	495	499	492	493	495	499	
LO PR	121	122	125	130	128	129	132	137	134	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	150												

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79
80	1790	MBh	58.6	59.4	61.1	63.7	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.1	50.8	51.6	53.3	56.0	47.9	48.7	50.5	53.1											
		S/T	0.92	0.85	0.71	0.57	1.00	0.85	0.72	0.57	1.00	0.88	0.74	0.60	1.00	0.90	0.76	0.62	1.00	0.92	0.78	0.64	1.00	1.00	1.00	0.84	0.69										
		ΔT	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	21	18	28	26	23	19											
		kW	3.35	3.35	3.34	3.38	3.78	3.78	3.77	3.80	4.25	4.25	4.24	4.27	4.76	4.76	4.75	4.79	5.34	5.33	5.33	5.36	6.01	6.00	6.00	6.03											
		Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.2	17.4	19.6	19.6	19.6	19.7	22.2	22.2	22.2	22.3	25.3	25.3	25.3	25.4											
	HI PR	258	259	261	266	299	300	302	306	341	342	344	348	386	387	389	394	435	436	438	443	488	489	491	495												
	LO PR	117	118	121	126	124	125	128	133	130	131	134	139	135	137	140	144	140	142	145	150	147	148	151	156												
	MBh	59.4	60.2	61.9	64.6	58.9	59.7	61.4	64.1	57.4	58.2	59.9	62.6	54.8	55.6	57.3	60.0	51.7	52.5	54.2	56.8	48.8	49.6	51.3	53.9												
	S/T	0.96	0.88	0.74	0.60	1.00	0.89	0.75	0.61	1.00	0.91	0.78	0.63	1.00	0.93	0.79	0.65	1.00	0.95	0.82	0.67	1.00	1.00	1.00	0.87	0.73											
	ΔT	26	24	21	17	26	24	21	17	26	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18												
kW	3.37	3.37	3.36	3.39	3.80	3.79	3.79	3.82	4.27	4.27	4.26	4.29	4.78	4.78	4.77	4.80	5.35	5.35	5.34	5.38	6.02	6.02	6.01	6.05													
Amps	13.2	13.2	13.2	13.3	15.2	15.2	15.1	15.3	17.4	17.3	17.3	17.5	19.7	19.7	19.6	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.3	25.5													
HI PR	260	261	263	268	301	302	304	308	343	344	346	350	388	389	391	396	437	438	440	445	490	491	493	497													
LO PR	119	120	123	128	126	127	130	135	132	133	136	141	137	138	141	146	142	143	146	151	148	150	153	158													
MBh	60.6	61.4	63.2	65.8	60.1	60.9	62.6	65.3	58.6	59.4	61.1	63.8	56.0	56.8	58.6	61.2	52.9	53.7	55.4	58.0	50.0	50.8	52.5	55.1													
S/T	0.97	0.89	0.76	0.61	1.00	0.90	0.76	0.62	1.00	0.92	0.79	0.64	1.00	0.94	0.81	0.66	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.88	0.74												
ΔT	25	23	20	16	25	23	20	16	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17													
kW	3.39	3.39	3.38	3.41	3.81	3.81	3.80	3.84	4.29	4.28	4.28	4.31	4.80	4.80	4.79	4.82	5.37	5.37	5.36	5.39	6.04	6.04	6.03	6.06													
Amps	13.3	13.3	13.3	13.4	15.3	15.3	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.7	19.9	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6													
HI PR	263	264	266	270	303	304	306	310	345	346	348	353	391	392	394	398	440	441	443	447	492	493	495	499													
LO PR	121	123	125	130	128	129	132	137	134	136	139	143	139	141	144	149	144	146	149	154	151	152	155	160													
85	1790	MBh	59.5	60.3	62.1	64.7	59.0	59.8	61.6	64.2	57.5	58.3	60.1	62.7	54.9	55.8	57.5	60.1	51.8	52.6	54.3	56.9	48.9	49.7	51.4	54.1											
		S/T	1.00	0.95	0.81	0.67	1.00	0.96	0.82	0.68	1.00	0.98	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.94	0.79											
		ΔT	31	29	25	22	31	29	25	22	31	29	26	22	31	29	25	22	30	29	25	22	32	30	26	23											
		kW	3.36	3.36	3.35	3.38	3.79	3.78	3.78	3.81	4.26	4.26	4.25	4.28	4.77	4.77	4.76	4.79	5.34	5.34	5.33	5.37	6.02	6.01	6.00	6.04											
		Amps	13.2	13.2	13.2	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.3	17.4	19.7	19.7	19.6	19.8	22.3	22.3	22.2	22.4	25.3	25.3	25.3	25.4											
	HI PR	260	261	262	267	300	301	303	307	342	343	345	349	388	389	390	395	437	438	439	444	489	490	492	496												
	LO PR	119	120	123	128	126	127	130	135	132	133	136	141	137	138	141	146	142	143	146	151	148	150	153	158												
	MBh	60.4	61.2	62.9	65.5	59.9	60.7	62.4	65.0	58.4	59.2	60.9	63.5	55.8	56.6	58.3	60.9	52.6	53.4	55.2	57.8	49.7	50.6	52.3	54.9												
	S/T	1.00	0.98	0.85	0.70	1.00	0.99	0.85	0.71	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.78	1.00	1.00	0.97	0.83												
	ΔT	30	28	25	21	30	28	24	21	30	28	25	21	30	28	24	21	30	28	24	21	31	29	25	22												
kW	3.38	3.38	3.37	3.40	3.80	3.80	3.79	3.83	4.28	4.27	4.27	4.30	4.79	4.79	4.78	4.81	5.36	5.36	5.35	5.38	6.03	6.03	6.02	6.05													
Amps	13.3	13.3	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.3	22.3	22.5	25.4	25.4	25.4	25.5													
HI PR	261	263	264	269	302	303	305	309	344	345	347	351	390	391	392	397	439	440	441	446	491	492	494	498													
LO PR	120	122	125	130	127	129	132	137	134	135	138	143	139	140	143	148	144	145	148	153	150	152	154	159													
MBh	61.6	62.4	64.1	66.8	61.1	61.9	63.6	66.2	59.6	60.4	62.1	64.7	57.0	57.8	59.5	62.2	53.8	54.7	56.4	59.0	51.0	51.8	53.5	56.1													
S/T	1.00	0.99	0.86	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.89	0.75	1.00	1.00	0.91	0.77	1.00	1.00	0.93	0.79	1.00	1.00	0.98	0.84													
ΔT	29	27	24	20	29	27	24	20	29	27	24	20	29	27	24	20	29	27	23	20	30	28	24	21													
kW	3.40	3.39	3.39	3.42	3.82	3.82	3.81	3.84	4.30	4.29	4.28	4.32	4.81	4.80	4.80	4.83	5.38	5.38	5.37	5.40	6.05	6.05	6.04	6.07													
Amps	13.4	13.3	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.4	17.6	19.8	19.8	19.8	19.9	22.4	22.4	22.4	22.5	25.5	25.5	25.5	25.6													
HI PR	264	265	267	271	304	305	307	312	346	348	349	354	392	393	395	399	441	442	444	448	493	494	496	501													
LO PR	123	124	127	132	130	131	134	139	136	137	140	145	141	142	145	150	146	148	150	155	153	154	157	162													

I DB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRl Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

**GSZ140181K\* - ARUF25B14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	22.9	21.7	20.4	19.1	18.3	17.7	16.4	15.2	12.9	11.9	10.9	10.3	9.9	8.9	7.9	6.9	5.9	4.8
T/R	34.8	33.0	31.0	29.0	27.7	26.9	24.9	23.0	19.5	18.0	16.6	15.7	15.1	13.5	12.0	10.5	8.9	7.3
kW	1.37	1.33	1.30	1.27	1.25	1.24	1.21	1.17	1.14	1.11	1.08	1.06	1.04	1.01	0.98	0.95	0.92	0.88
Amps	7.4	6.8	6.4	6.0	5.7	5.6	5.3	5.0	4.7	4.5	4.2	4.1	4.1	3.8	3.5	3.3	3.0	2.7
COP	4.35	4.21	4.04	3.87	3.74	3.66	3.48	3.28	2.85	2.70	2.55	2.44	2.38	2.19	2.00	1.79	1.57	1.33
HI PR	409	392	377	360	352	345	332	318	305	291	280	273	268	258	248	238	229	221
LO PR	153	142	133	122	115	111	102	91	82	73	64	60	58	49	42	35	31	24

**GSZ140241K\* - ARUF25B14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	29.6	28.0	26.4	24.7	23.6	22.8	21.2	19.6	17.0	15.7	14.5	13.7	13.2	11.8	10.5	9.1	7.8	6.4
T/R	31.5	29.9	28.1	26.3	25.1	24.3	22.6	20.8	18.1	16.7	15.4	14.6	14.0	12.6	11.1	9.7	8.3	6.8
kW	1.70	1.66	1.62	1.58	1.55	1.54	1.50	1.46	1.47	1.42	1.38	1.36	1.34	1.30	1.26	1.22	1.18	1.14
Amps	9.2	8.5	7.9	7.4	7.1	7.0	6.5	6.2	5.9	5.6	5.3	5.1	5.1	4.8	4.4	4.1	3.7	3.3
COP	4.41	4.26	4.10	3.91	3.79	3.70	3.52	3.32	2.87	2.72	2.57	2.46	2.39	2.20	2.01	1.80	1.58	1.33
HI PR	384	369	354	339	331	325	312	299	287	274	263	257	252	242	233	224	216	208
LO PR	143	132	124	114	108	104	95	85	77	68	60	56	54	46	39	33	29	23

**GSZ140301K\* - ARUF29B14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	36.1	34.2	32.2	30.1	28.7	27.8	25.8	23.8	20.9	19.3	17.8	16.8	16.2	14.5	12.9	11.2	9.6	7.8
T/R	38.4	36.4	34.2	32.0	30.6	29.6	27.5	25.4	22.3	20.5	18.9	17.9	17.2	15.4	13.7	11.9	10.2	8.3
kW	2.24	2.19	2.14	2.08	2.05	2.03	1.98	1.92	1.87	1.81	1.76	1.73	1.71	1.65	1.60	1.55	1.50	1.45
Amps	12.2	11.2	10.4	9.8	9.4	9.2	8.6	8.1	7.7	7.4	7.0	6.8	6.7	6.3	5.8	5.4	4.9	4.4
COP	4.23	4.09	3.94	3.77	3.64	3.57	3.39	3.20	2.89	2.73	2.58	2.48	2.41	2.22	2.03	1.82	1.60	1.35
HI PR	419	401	386	369	360	354	340	326	312	298	287	280	275	264	254	244	235	227
LO PR	141	131	122	112	106	102	94	84	75	67	59	55	53	45	39	33	29	22

**GSZ140361K\* - ARUF37C14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	41.3	39.1	36.8	34.4	32.9	31.9	29.6	27.3	25.7	23.7	21.8	20.6	19.8	17.8	15.8	13.8	11.7	9.6
T/R	35.8	33.9	31.9	29.8	28.5	27.6	25.6	23.6	22.2	20.5	18.9	17.8	17.2	15.4	13.7	11.9	10.2	8.3
kW	2.48	2.42	2.36	2.30	2.27	2.24	2.19	2.13	2.21	2.14	2.08	2.05	2.02	1.96	1.90	1.84	1.77	1.71
Amps	13.5	12.4	11.6	10.8	10.4	10.2	9.5	9.0	8.6	8.1	7.7	7.5	7.4	7.0	6.4	6.0	5.5	4.8
COP	4.26	4.12	3.96	3.79	3.66	3.58	3.40	3.21	2.93	2.77	2.62	2.51	2.44	2.25	2.05	1.84	1.61	1.36
HI PR	370	355	341	326	319	313	301	289	276	264	253	247	243	234	225	216	208	201
LO PR	129	119	112	103	97	93	86	76	69	62	54	50	48	41	35	30	26	20

Calculations are based on nominal CFM and 70°F indoor dry bulb.  
 High pressure is measured at the suction service valve ( the larger valve).  
 Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)  
 kW = Total system power

**GSZ140421K\* - ARUF43C14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	50.3	47.6	44.8	41.9	40.0	38.8	36.0	33.2	30.4	28.1	25.9	24.4	23.5	21.1	18.7	16.3	13.9	11.4
T/R	35.8	33.9	31.9	29.8	28.5	27.6	25.6	23.6	21.7	20.0	18.4	17.4	16.7	15.0	13.3	11.6	9.9	8.1
kW	2.88	2.81	2.74	2.67	2.63	2.60	2.54	2.47	2.49	2.42	2.35	2.31	2.28	2.21	2.14	2.07	2.00	1.93
Amps	15.6	14.4	13.4	12.5	12.0	11.8	11.1	10.4	9.9	9.4	8.9	8.7	8.6	8.1	7.5	7.0	6.3	5.6
COP	4.38	4.24	4.07	3.89	3.76	3.68	3.49	3.29	3.00	2.84	2.67	2.56	2.49	2.30	2.09	1.87	1.64	1.38
HI PR	388	372	358	342	334	328	315	303	290	277	266	259	255	245	236	226	218	210
LO PR	137	127	119	109	103	99	91	81	73	65	58	54	52	44	38	32	28	22

**GSZ140481K\* - ARUF61D14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	56.4	53.4	50.3	47.0	44.9	43.5	40.4	37.2	35.4	32.6	30.1	28.4	27.3	24.5	21.7	19.0	16.2	13.3
T/R	33.6	31.8	29.9	28.0	26.7	25.9	24.0	22.2	21.0	19.4	17.9	16.9	16.3	14.6	12.9	11.3	9.6	7.9
kW	3.12	3.04	2.97	2.90	2.85	2.82	2.75	2.68	2.80	2.72	2.64	2.59	2.56	2.48	2.40	2.33	2.25	2.17
Amps	17.0	15.6	14.5	13.6	13.1	12.8	12.0	11.3	10.8	10.2	9.7	9.4	9.3	8.7	8.1	7.5	6.9	6.1
COP	4.50	4.35	4.18	3.99	3.86	3.77	3.58	3.38	3.09	2.92	2.75	2.64	2.57	2.36	2.15	1.93	1.69	1.42
HI PR	369	354	340	325	318	312	300	288	275	263	253	247	242	233	224	215	207	200
LO PR	130	120	113	103	98	94	86	77	69	62	54	51	49	41	36	30	26	21

**GSZ140491K\* - ARUF49C14\*\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	59.3	56.2	52.9	49.4	47.2	45.7	42.5	39.2	35.5	32.8	30.2	28.5	27.5	24.7	21.9	19.1	16.3	13.3
T/R	39.2	37.1	35.0	32.7	31.2	30.2	28.1	25.9	23.5	21.7	20.0	18.9	18.2	16.3	14.5	12.6	10.8	8.8
kW	3.39	3.31	3.23	3.15	3.10	3.07	2.99	2.91	2.82	2.74	2.66	2.61	2.58	2.50	2.42	2.35	2.26	2.19
Amps	18.5	17.0	15.8	14.8	14.2	13.9	13.0	12.3	11.7	11.1	10.5	10.3	10.1	9.5	8.8	8.2	7.5	6.6
COP	4.43	4.28	4.11	3.93	3.80	3.72	3.53	3.33	3.10	2.94	2.77	2.65	2.58	2.38	2.16	1.94	1.70	1.43
HI PR	413	396	381	364	355	349	335	322	308	294	282	276	271	260	250	240	232	223
LO PR	140	130	122	112	106	101	93	83	75	67	59	55	53	45	39	32	28	22

**GSZ140601K\* - ASPT61D14\* + TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	75.8	71.8	67.6	63.2	60.3	58.5	54.3	50.1	45.7	42.2	38.8	36.7	35.3	31.7	28.1	24.5	20.9	17.1
T/R	38.9	36.8	34.7	32.4	30.9	30.0	27.8	25.7	23.4	21.6	19.9	18.8	18.1	16.3	14.4	12.6	10.7	8.8
kW	4.50	4.39	4.28	4.17	4.11	4.07	3.96	3.86	3.60	3.50	3.40	3.34	3.30	3.20	3.10	3.00	2.89	2.79
Amps	24.5	22.5	21.0	19.6	18.8	18.4	17.3	16.3	15.5	14.8	14.0	13.6	13.4	12.6	11.7	10.9	9.9	8.7
COP	4.47	4.32	4.16	3.98	3.85	3.77	3.58	3.38	3.28	3.11	2.93	2.82	2.74	2.53	2.30	2.07	1.82	1.53
HI PR	427	410	394	377	368	361	347	333	319	305	292	285	280	270	259	249	240	231
LO PR	131	121	114	104	99	95	87	78	70	63	55	51	49	42	36	30	27	21

Calculations are based on nominal CFM and 70°F indoor dry bulb.  
 High pressure is measured at the suction service valve ( the larger valve).  
 Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)  
 kW = Total system power

<b>MODEL: GSZ140181K* + ARUF25B14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 610 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,900	13,986	4,914	1,180
80	18,650	14,077	4,573	1,245
85	18,400	14,168	4,232	1,310
90	18,000	14,036	3,964	1,380
<b>95</b>	<b>17,600</b>	<b>13,904</b>	<b>3,696</b>	<b>1,450</b>
100	17,100	13,675	3,425	1,530
105	16,600	13,446	3,154	1,610
110	16,150	13,474	2,676	1,705
115	15,700	13,502	2,198	1,800
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>17,000</b>	<b>13,600</b>	<b>3,400</b>	<b>1,450</b>

<b>MODEL: GSZ140241K* + ARUF25B14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 870 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	25,100	19,076	6,024	1,580
80	25,400	19,093	6,307	1,675
85	24,500	19,110	5,390	1,770
90	24,550	18,915	5,635	1,870
<b>95</b>	<b>23,400</b>	<b>18,720</b>	<b>4,680</b>	<b>1,970</b>
100	23,350	18,532	4,819	2,080
105	22,100	18,343	3,757	2,190
110	22,050	18,368	3,683	2,385
115	20,900	18,392	2,508	2,450
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>22,600</b>	<b>18,532</b>	<b>4,068</b>	<b>1,970</b>

<b>MODEL: GSZ140301K* + ARUF29B14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 870 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	29,600	20,720	8,880	1,880
80	29,250	20,764	8,486	1,995
85	28,900	20,808	8,092	2,110
90	28,250	20,616	7,634	2,230
<b>95</b>	<b>27,600</b>	<b>20,424</b>	<b>7,176</b>	<b>2,350</b>
100	26,850	20,130	6,720	2,490
105	26,100	19,836	6,264	2,630
110	25,400	19,922	5,479	2,790
115	24,700	20,007	4,693	2,950
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>26,600</b>	<b>19,950</b>	<b>6,650</b>	<b>2,360</b>

<b>MODEL: GSZ140361K* + ARUF37C14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 1070 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	37,700	26,390	11,310	2,430
80	37,250	26,443	10,807	2,575
85	36,800	26,496	10,304	2,720
90	36,000	26,272	9,728	2,880
<b>95</b>	<b>35,200</b>	<b>26,048</b>	<b>9,152</b>	<b>3,040</b>
100	34,200	25,640	8,560	3,220
105	33,200	25,232	7,968	3,400
110	32,300	25,333	6,967	3,610
115	31,400	25,434	5,966	3,820
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>33,900</b>	<b>25,425</b>	<b>8,475</b>	<b>3,050</b>

<b>MODEL: GSZ140421K* + ARUF43C14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 1300 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	41,800	29,678	12,122	2,720
80	41,300	29,935	11,365	2,870
85	40,800	30,192	10,608	3,020
90	39,900	29,916	9,984	3,190
<b>95</b>	<b>39,000</b>	<b>29,640</b>	<b>9,360</b>	<b>3,360</b>
100	37,900	29,172	8,728	3,545
105	36,800	28,704	8,096	3,730
110	35,800	28,794	7,006	3,950
115	34,800	28,884	5,916	4,170
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>37,600</b>	<b>28,952</b>	<b>8,648</b>	<b>3,360</b>

<b>MODEL: GSZ140481K + ARUF61D14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 1560 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	48,300	35,742	12,558	3,110
80	47,700	36,005	11,696	3,290
85	47,100	36,267	10,833	3,470
90	46,550	35,909	10,642	3,665
<b>95</b>	<b>45,000</b>	<b>35,550</b>	<b>9,450</b>	<b>3,860</b>
100	43,750	34,988	8,763	4,075
105	42,500	34,425	8,075	4,290
110	41,350	34,499	6,852	4,545
115	40,200	34,572	5,628	4,800
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>43,400</b>	<b>34,720</b>	<b>8,680</b>	<b>3,860</b>

<b>MODEL: GSZ140491K* + ARUF49C14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	47,700	33,867	13,833	3,000
80	47,100	33,906	13,194	3,175
85	46,500	33,945	12,555	3,350
90	45,500	33,660	11,840	3,540
<b>95</b>	<b>44,500</b>	<b>33,375</b>	<b>11,125</b>	<b>3,730</b>
100	43,250	33,068	10,183	3,940
105	42,000	32,760	9,240	4,150
110	40,850	32,856	7,995	4,400
115	39,700	32,951	6,749	4,650
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>42,900</b>	<b>32,604</b>	<b>10,296</b>	<b>3,730</b>

<b>MODEL: GSZ140601K* + ASPT61D14** + TXV</b>				
Conditions: 80 °F IBD, 67 °F IWB @ 1790 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	60,600	42,420	18,180	3,770
80	59,850	42,782	17,069	4,010
85	59,100	43,143	15,957	4,250
90	57,800	42,759	15,041	4,505
<b>95</b>	<b>56,500</b>	<b>42,375</b>	<b>14,125</b>	<b>4,760</b>
100	54,900	41,708	13,192	5,045
105	53,300	41,041	12,259	5,330
110	51,900	41,226	10,675	5,670
115	50,500	41,410	9,090	6,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>54,500</b>	<b>41,420</b>	<b>13,080</b>	<b>4,770</b>

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^			TVA RATINGS ^			HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 0181K*	ARUF25B14A*		17,600	13,900	14.00	11.50	17,000	13,600	18,000	8.20	10,000	610	7995033
	ARUF25B14A*+TXV		17,400	13,700	14.00	11.50	16,800	13,400	18,000	8.20	10,000	610	7995034
	AVPTC24B14A*		17,200	13,600	14.50	12.00	16,600	13,300	17,200	8.20	10,000	600	7994958
	AWUF31X16A*		17,200	13,600	14.50	12.00	16,600	13,300	17,200	8.20	10,000	620	7994959
	AWUF31X16A*+TXV		17,200	13,600	15.00	12.50	16,600	13,300	17,200	8.20	10,000	620	7994960
	CA*F3137*6A*+EEP+TXV		17,600	13,900	14.00	11.50	17,000	13,600	18,000	8.20	10,000	610	7995035
	CA*F3636*6D*+MBVC1200**-.1A*+TXV		17,600	13,900	15.00	12.50	17,000	13,600	17,600	8.20	10,000	600	7994961
	CA*F3636*6D*+TXV	A*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994962
	CA*F3636*6D*+TXV	A*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994963
	CA*F3636*6D*+TXV	A*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7994964
	CA*F3636*6D*+TXV	A*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994965
	CA*F3636*6D*+TXV	A*EH800603B*A*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7994966
	CA*F3636*6D*+TXV	A*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7994967
	CA*F3636*6D*+TXV	A*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994968
	CA*F3636*6D*+TXV	A*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994969
	CA*F3636*6D*+TXV	A*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7994970
	CA*F3636*6D*+TXV	G*E80603B*B*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7994971
	CA*F3636*6D*+TXV	G*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994972
	CA*F3636*6D*+TXV	G*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994973
	CA*F3636*6D*+TXV	G*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7994974
CA*F3636*6D*+TXV	G*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994975	
CA*F3636*6D*+TXV	G*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7994976	
CA*F3636*6D*+TXV	G*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994977	
CA*F3636*6D*+TXV	G*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994978	
CA*F3636*6D*+TXV	G*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7994979	
CHPF3636B6C*+MBVC1200**-.1A*+TXV		17,600	13,900	15.00	12.50	17,000	13,600	17,600	8.20	10,000	600	7995036	
CHPF3636B6C*+TXV	A*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995037	
CHPF3636B6C*+TXV	A*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995038	
CHPF3636B6C*+TXV	A*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7995039	
CHPF3636B6C*+TXV	A*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995040	
CHPF3636B6C*+TXV	A*EH800603B*A*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7995041	
CHPF3636B6C*+TXV	A*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7995042	
CHPF3636B6C*+TXV	A*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7995043	
CHPF3636B6C*+TXV	A*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7995044	
CHPF3636B6C*+TXV	A*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7995045	
CHPF3636B6C*+TXV	G*E80603B*B*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7995046	
CHPF3636B6C*+TXV	G*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995047	
CHPF3636B6C*+TXV	G*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995048	
CHPF3636B6C*+TXV	G*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7995049	
CHPF3636B6C*+TXV	G*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7995050	
CHPF3636B6C*+TXV	G*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7995051	
CHPF3636B6C*+TXV	G*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7995052	
CHPF3636B6C*+TXV	G*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7995053	

See Notes on Page 42.



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>^</sup>				HEATING RATINGS <sup>^</sup>				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	SEER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0181K* (cont.)	CHPF3636B6C*+TXV	G*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7995054
	CSCF3036N6D*+EEP+TXV		17,600	13,900	14.00	11.50	17,000	13,600	17,600	8.20	10,000	610	7994980
	CSCF3036N6D*+MBVC1200**,-1A*+TXV		17,600	13,900	15.00	12.50	17,000	13,600	17,600	8.20	10,000	600	7994981
	CSCF3036N6D*+TXV	A*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994982
	CSCF3036N6D*+TXV	A*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994983
	CSCF3036N6D*+TXV	A*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7994984
	CSCF3036N6D*+TXV	A*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994985
	CSCF3036N6D*+TXV	A*EH800603B*A*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7994986
	CSCF3036N6D*+TXV	A*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7994987
	CSCF3036N6D*+TXV	A*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994988
	CSCF3036N6D*+TXV	A*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994989
	CSCF3036N6D*+TXV	A*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7994990
	CSCF3036N6D*+TXV	G*E80603B*B*	17,800	14,100	15.00	12.50	17,200	13,800	17,800	8.20	10,000	650	7994991
	CSCF3036N6D*+TXV	G*EC960302BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994992
	CSCF3036N6D*+TXV	G*EC960402BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994993
	CSCF3036N6D*+TXV	G*EC960603BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	550	7994994
CSCF3036N6D*+TXV	G*EC960803BNA*	17,200	13,600	15.00	12.50	16,600	13,300	17,400	8.20	10,000	540	7994995	
CSCF3036N6D*+TXV	G*VC80604B*B*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	620	7994996	
CSCF3036N6D*+TXV	G*VC960403BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994997	
CSCF3036N6D*+TXV	G*VC960603BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	610	7994998	
CSCF3036N6D*+TXV	G*VC960803BNA*	17,600	13,900	14.50	12.00	17,000	13,600	17,600	8.20	10,000	615	7994999	
ARUF25B14A*		23,200	18,600	14.00	11.50	22,400	18,400	23,200	8.20	13,000	870	7995055	
ARUF25B14A*+TXV		23,200	18,600	14.00	11.50	22,400	18,400	23,200	8.20	12,600	870	7995056	
AVPTC24B14A*		23,200	18,600	14.50	12.00	22,400	18,400	23,200	8.20	13,400	860	7995057	
AMUJF31X16A*		22,800	18,200	14.50	12.00	22,000	18,100	23,200	8.20	13,000	845	7995000	
AMUJF31X16A*+TXV		22,800	18,200	15.00	12.50	22,000	18,100	23,200	8.20	13,000	845	7995001	
CA*F3137*GA*+EEP+TXV		23,600	18,900	14.00	11.50	22,800	18,700	23,200	8.20	13,000	870	7995002	
CA*F3636*6D*	A*EC960302BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	800	7995078	
CA*F3636*6D*	A*EC960402BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	820	7995079	
CA*F3636*6D*	A*EC960603BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	840	7995080	
CA*F3636*6D*	A*EC960803BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	770	7995081	
CA*F3636*6D*	A*EH800603B*A*	23,200	18,600	14.50	12.00	22,400	18,400	23,000	8.20	13,000	860	7995082	
CA*F3636*6D*	A*VC80604B*B*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	850	7995083	
CA*F3636*6D*	A*VC960403BNA*	23,000	18,400	14.50	12.00	22,200	18,200	23,200	8.20	13,000	800	7995084	
CA*F3636*6D*	A*VC960603BNA*	23,000	18,400	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995085	
CA*F3636*6D*	A*VC960803BNA*	23,000	18,400	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995086	
CA*F3636*6D*	G*E80603B*B*	23,200	18,600	14.50	12.00	22,400	18,400	23,000	8.20	13,000	860	7995087	
CA*F3636*6D*	G*EC960302BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	800	7995088	
CA*F3636*6D*	G*EC960402BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	820	7995089	
CA*F3636*6D*	G*EC960603BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	840	7995090	
CA*F3636*6D*	G*EC960803BNA*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	770	7995091	
CA*F3636*6D*	G*VC80604B*B*	23,000	18,400	14.50	12.00	22,200	18,200	22,800	8.20	13,000	850	7995092	
CA*F3636*6D*	G*VC960403BNA*	23,000	18,400	14.50	12.00	22,200	18,200	23,200	8.20	13,000	800	7995093	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0241K* (cont.)	CA *F3636*6D*	G*V C960603BNA*	23,000	14.50	12.00	23,000	18,400	23,200	8.20	13,000	810	7995094	
	CA *F3636*6D*	G*V C960803BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995095	
	CA *F3636*6D*+MBVC1200**,-1A*		23,600	14.50	12.00	22,800	18,900	23,200	8.50	13,000	855	7995058	
	CA *F3636*6D*+MBVC1200**,-1A*+TXV		23,600	15.00	12.50	22,800	18,900	23,200	8.50	13,000	855	7995059	
	CA *F3636*6D*+TXV	A*EC960302BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	800	7995060	
	CA *F3636*6D*+TXV	A*EC960402BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	820	7995061	
	CA *F3636*6D*+TXV	A*EC960603BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	840	7995062	
	CA *F3636*6D*+TXV	A*EC960803BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	770	7995063	
	CA *F3636*6D*+TXV	A*EH800603B*A*	23,200	14.50	12.00	22,400	18,600	23,000	8.20	13,000	860	7995064	
	CA *F3636*6D*+TXV	A*VC80604B*B*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	850	7995065	
	CA *F3636*6D*+TXV	A*VC960403BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	800	7995066	
	CA *F3636*6D*+TXV	A*VC960603BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995067	
	CA *F3636*6D*+TXV	A*VC960803BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995068	
	CA *F3636*6D*+TXV	G*E80603B*B*	23,200	14.50	12.00	22,400	18,600	23,000	8.20	13,000	860	7995069	
	CA *F3636*6D*+TXV	G*EC960302BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	800	7995070	
	CA *F3636*6D*+TXV	G*EC960402BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	820	7995071	
	CA *F3636*6D*+TXV	G*EC960603BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	840	7995072	
	CA *F3636*6D*+TXV	G*EC960803BNA*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	770	7995073	
	CA *F3636*6D*+TXV	G*VC80604B*B*	23,000	15.00	12.50	22,200	18,400	22,800	8.20	13,000	850	7995074	
	CA *F3636*6D*+TXV	G*VC960403BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	800	7995075	
	CA *F3636*6D*+TXV	G*VC960603BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995076	
	CA *F3636*6D*+TXV	G*VC960803BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995077	
	CHPF3636B6C*	A*EC960302BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	800	7995014	
	CHPF3636B6C*	A*EC960402BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	820	7995015	
	CHPF3636B6C*	A*EC960603BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	840	7995016	
	CHPF3636B6C*	A*EC960803BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	770	7995017	
	CHPF3636B6C*	A*EH800603B*A*	23,200	14.50	12.00	22,400	18,600	23,200	8.20	13,000	860	7995018	
	CHPF3636B6C*	A*VC80604B*B*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	850	7995019	
	CHPF3636B6C*	G*E80603B*B*	23,200	14.50	12.00	22,400	18,600	23,200	8.20	13,000	860	7995020	
	CHPF3636B6C*	G*EC960302BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	800	7995021	
CHPF3636B6C*	G*EC960402BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	820	7995022		
CHPF3636B6C*	G*EC960603BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	840	7995023		
CHPF3636B6C*	G*EC960803BNA*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	770	7995024		
CHPF3636B6C*	G*VC80604B*B*	23,000	14.50	12.00	22,200	18,400	22,800	8.20	13,000	850	7995025		
CHPF3636B6C*	A*VC960403BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	800	7995106		
CHPF3636B6C*	A*VC960603BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995107		
CHPF3636B6C*	A*VC960803BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995108		
CHPF3636B6C*	G*V C960403BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	800	7995109		
CHPF3636B6C*	G*V C960603BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995110		
CHPF3636B6C*	G*V C960803BNA*	23,000	14.50	12.00	22,200	18,400	23,200	8.20	13,000	810	7995111		
CHPF3636B6C*+EEP+TXV		23,200	14.00	11.50	22,400	18,600	23,200	8.20	13,000	870	7995003		
CHPF3636B6C*+MBVC1200**,-1A*		23,600	14.50	12.00	22,800	18,900	23,200	8.50	13,000	855	7995096		
CHPF3636B6C*+MBVC1200**,-1A*+TXV		23,600	15.00	12.50	22,800	18,900	23,200	8.50	13,000	855	7995097		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0241K* (cont.)	CHPF3636B6C*+TXV	A*EC960302BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	800	7995004	
	CHPF3636B6C*+TXV	A*EC960402BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	820	7995005	
	CHPF3636B6C*+TXV	A*EC960603BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	840	7995006	
	CHPF3636B6C*+TXV	A*EC960803BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	770	7995007	
	CHPF3636B6C*+TXV	A*EH800603B*A*	23,200	14.50	12.00	22,400	18,400	23,200	8.20	13,000	860	7995008	
	CHPF3636B6C*+TXV	G*E80603B*B*	23,200	14.50	12.00	22,400	18,400	23,200	8.20	13,000	860	7995009	
	CHPF3636B6C*+TXV	G*EC960302BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	800	7995010	
	CHPF3636B6C*+TXV	G*EC960402BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	820	7995011	
	CHPF3636B6C*+TXV	G*EC960603BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	840	7995012	
	CHPF3636B6C*+TXV	G*EC960803BNA*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	770	7995013	
	CHPF3636B6C*+TXV	A*VC80604B*B*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	850	7995098	
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	800	7995099	
	CHPF3636B6C*+TXV	A*VC960603BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995100	
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995101	
	CHPF3636B6C*+TXV	G*VC80604B*B*	23,000	15.00	12.50	22,200	18,200	22,800	8.20	13,000	850	7995102	
CHPF3636B6C*+TXV	G*VC960403BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	800	7995103		
CHPF3636B6C*+TXV	G*VC960603BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995104		
CHPF3636B6C*+TXV	G*VC960803BNA*	23,000	14.50	12.00	22,200	18,200	23,200	8.20	13,000	810	7995105		
GSZ14 0301K*	ARUF29B14A*+TXV		27,600	14.00	11.50	26,600	20,000	28,400	8.20	16,200	870	7995112	
	ARUF31B14A*		28,000	14.00	12.00	27,000	20,200	27,800	8.20	16,200	910	7995113	
	AVPTC30C14A*		27,800	15.00	12.50	26,800	20,000	28,000	8.50	16,000	860	7995114	
	AWUF31X16A*		27,800	14.00	12.00	26,800	20,000	28,000	8.20	17,000	980	7995115	
	AWUF31X16A*+TXV		27,800	14.50	12.00	26,800	20,000	28,000	8.20	17,000	980	7995116	
	CA*F3137*6A*	A*EC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400	1,020	7995132	
	CA*F3137*6A*	A*EC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	990	7995133	
	CA*F3137*6A*	A*EH800603B*A*	28,400	14.00	11.50	27,400	20,600	28,000	8.20	16,400	860	7995134	
	CA*F3137*6A*	A*VC80604B*B*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	995	7995135	
	CA*F3137*6A*	A*VC960403BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,600	1,000	7995136	
	CA*F3137*6A*	A*VC960603BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,400	910	7995137	
	CA*F3137*6A*	A*VC960803BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,400	920	7995138	
	CA*F3137*6A*	G*E80603B*B*	28,400	14.00	11.50	27,400	20,600	28,000	8.20	16,400	860	7995139	
	CA*F3137*6A*	G*EC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400	1,020	7995140	
	CA*F3137*6A*	G*EC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	990	7995141	
CA*F3137*6A*	G*VC80604B*B*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	995	7995142		
CA*F3137*6A*	G*VC960403BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,600	1,000	7995143		
CA*F3137*6A*	G*VC960603BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,400	910	7995144		
CA*F3137*6A*	G*VC960803BNA*	28,400	14.50	11.50	27,400	20,600	28,200	8.50	16,400	920	7995145		
CA*F3137*6A*+EEP+TXV	CA*F3137*6A*+EEP+TXV	28,000	14.00	11.50	27,000	20,200	28,000	8.20	16,600	870	7995117		
CA*F3137*6A*+TXV	CA*F3137*6A*+TXV	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	1,020	7995118		
CA*F3137*6A*+TXV	A*EC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	990	7995119		
CA*F3137*6A*+TXV	A*EH800603B*A*	28,400	14.50	12.00	27,400	20,600	28,000	8.20	16,400	860	7995120		
CA*F3137*6A*+TXV	A*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	995	7995121		
CA*F3137*6A*+TXV	A*VC960403BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,600	1,000	7995122		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0301K* (cont.)	CA *F3137*6A*+TXV	A*VC960603BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,400	910	7995123	
	CA *F3137*6A*+TXV	A*VC960803BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,400	920	7995124	
	CA *F3137*6A*+TXV	G*E80603B*B*	28,400	14.50	12.00	27,400	20,600	28,000	8.20	16,400	860	7995125	
	CA *F3137*6A*+TXV	G*EC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	1,020	7995126	
	CA *F3137*6A*+TXV	G*EC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	990	7995127	
	CA *F3137*6A*+TXV	G*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	995	7995128	
	CA *F3137*6A*+TXV	G*VC960403BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,600	1,000	7995129	
	CA *F3137*6A*+TXV	G*VC960603BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,400	910	7995130	
	CA *F3137*6A*+TXV	G*VC960803BNA*	28,400	15.00	12.00	27,400	20,600	28,200	8.50	16,400	920	7995131	
	CA *F3642*6D*+MBVC1200**-.1A*		28,000	20,800	12.00	27,000	20,200	28,000	8.50	16,200	855	7995146	
	CA *F3642*6D*+MBVC1200**-.1A*+TXV		28,000	20,800	12.50	27,000	20,200	28,000	8.50	16,200	855	7995147	
	CA *F3642*6D*+MBVC1600**-.1A*		28,000	20,800	14.50	27,000	20,200	28,000	8.50	16,200	855	7995148	
	CA *F3642*6D*+MBVC1600**-.1A*+TXV		28,000	20,800	15.00	27,000	20,200	28,000	8.50	16,200	855	7995149	
	CA *F3743*6D*	A*VC80805C*B*	28,200	20,800	14.50	27,200	20,400	28,000	8.50	16,200	880	7995157	
	CA *F3743*6D*	A*VC960804CNA*	28,200	20,800	14.50	27,200	20,400	28,000	8.50	16,200	940	7995158	
	CA *F3743*6D*	A*VC961005CNA*	28,200	20,800	12.00	27,200	20,400	28,000	8.50	16,200	865	7995159	
	CA *F3743*6D*	G*VC80805C*B*	28,200	20,800	12.00	27,200	20,400	28,000	8.50	16,200	880	7995160	
	CA *F3743*6D*	G*VC960804CNA*	28,200	20,800	12.00	27,200	20,400	28,000	8.50	16,200	940	7995161	
	CA *F3743*6D*	G*VC961005CNA*	28,200	20,800	12.00	27,200	20,400	28,000	8.50	16,200	865	7995162	
	CA *F3743*6D*+TXV	A*VC80805C*B*	28,200	20,800	14.00	27,000	20,200	28,000	8.20	16,600	870	7995150	
	CA *F3743*6D*+TXV	A*VC960804CNA*	28,200	20,800	15.00	27,200	20,400	28,000	8.50	16,200	880	7995151	
	CA *F3743*6D*+TXV	A*VC961005CNA*	28,200	20,800	12.50	27,200	20,400	28,000	8.50	16,200	940	7995152	
	CA *F3743*6D*+TXV	G*VC80805C*B*	28,200	20,800	15.00	27,200	20,400	28,000	8.50	16,200	865	7995153	
	CA *F3743*6D*+TXV	G*VC960804CNA*	28,200	20,800	12.50	27,200	20,400	28,000	8.50	16,200	880	7995154	
	CA *F3743*6D*+TXV	G*VC961005CNA*	28,200	20,800	12.50	27,200	20,400	28,000	8.50	16,200	940	7995155	
	CA *F3743*6D*+TXV	A*VC961005CNA*	28,200	20,800	15.00	27,200	20,400	28,000	8.50	16,200	865	7995156	
	CHPF3636B6C*	A*EC960603BNA*	28,400	21,000	11.50	27,400	20,600	28,400	8.50	16,600	1,020	7995177	
	CHPF3636B6C*	A*EC960803BNA*	28,400	21,000	11.50	27,400	20,600	28,400	8.50	16,600	990	7995178	
	CHPF3636B6C*	A*EH800603B*A*	28,000	20,800	14.00	27,000	20,200	28,000	8.20	16,200	860	7995179	
	CHPF3636B6C*	A*VC80604B*B*	28,400	21,000	14.00	27,400	20,600	28,400	8.50	16,600	995	7995180	
	CHPF3636B6C*	A*VC960403BNA*	28,400	21,000	14.00	27,400	20,600	28,400	8.50	16,600	1,000	7995181	
	CHPF3636B6C*	A*VC960603BNA*	28,200	20,800	11.50	27,200	20,400	28,400	8.50	16,400	910	7995182	
CHPF3636B6C*	A*VC960803BNA*	28,200	20,800	14.00	27,200	20,400	28,400	8.50	16,400	920	7995183		
CHPF3636B6C*	G*E80603B*B*	28,000	20,800	14.00	27,000	20,200	28,000	8.20	16,200	860	7995184		
CHPF3636B6C*	G*EC960603BNA*	28,400	21,000	11.50	27,400	20,600	28,400	8.50	16,600	1,020	7995185		
CHPF3636B6C*	G*EC960803BNA*	28,400	21,000	14.00	27,400	20,600	28,400	8.50	16,600	990	7995186		
CHPF3636B6C*	G*VC80604B*B*	28,400	21,000	14.00	27,400	20,600	28,400	8.50	16,600	995	7995187		
CHPF3636B6C*	G*VC960403BNA*	28,400	21,000	11.50	27,400	20,600	28,400	8.50	16,600	1,000	7995188		
CHPF3636B6C*	G*VC960603BNA*	28,200	20,800	14.00	27,200	20,400	28,400	8.50	16,400	910	7995189		
CHPF3636B6C*	G*VC960803BNA*	28,200	20,800	14.00	27,200	20,400	28,400	8.50	16,400	920	7995190		
CHPF3636B6C*+TXV	A*EC960603BNA*	28,400	21,000	14.50	27,400	20,600	28,400	8.50	16,600	1,020	7995163		
CHPF3636B6C*+TXV	A*EC960803BNA*	28,400	21,000	14.50	27,400	20,600	28,400	8.50	16,600	990	7995164		
CHPF3636B6C*+TXV	A*EH800603B*A*	28,000	20,800	14.50	27,000	20,200	28,000	8.20	16,200	860	7995165		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0301K* (cont.)	CHPF3636B6C*+TXV	A*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	995	7995166	
	CHPF3636B6C*+TXV	A*VC960403BNA*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	1,000	7995167	
	CHPF3636B6C*+TXV	A*VC960603BNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	910	7995168	
	CHPF3636B6C*+TXV	A*VC960803BNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	920	7995169	
	CHPF3636B6C*+TXV	G*E80603B*B*	28,000	14.50	12.00	27,000	20,200	28,000	8.20	16,200	860	7995170	
	CHPF3636B6C*+TXV	G*EC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	1,020	7995171	
	CHPF3636B6C*+TXV	G*EC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	990	7995172	
	CHPF3636B6C*+TXV	G*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	995	7995173	
	CHPF3636B6C*+TXV	G*VC960403BNA*	28,400	14.50	12.00	27,400	20,600	28,400	8.50	16,600	1,000	7995174	
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	910	7995175	
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	920	7995176	
	CHPF3642C6C*	A*VC80805C*B*	28,000	14.50	12.00	27,000	20,200	28,000	8.20	16,200	880	7995201	
	CHPF3642C6C*	A*VC960804CNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	940	7995202	
	CHPF3642C6C*	A*VC961005CNA*	28,000	14.50	12.00	27,000	20,200	28,000	8.20	16,200	865	7995203	
	CHPF3642C6C*	G*VC80805C*B*	28,000	14.50	12.00	27,000	20,200	28,000	8.20	16,200	880	7995204	
	CHPF3642C6C*	G*VC960804CNA*	28,200	14.50	12.00	27,200	20,400	28,400	8.50	16,400	940	7995205	
	CHPF3642C6C*	G*VC961005CNA*	28,000	14.50	12.00	27,000	20,200	28,000	8.20	16,200	865	7995206	
	CHPF3642C6C*+MBVCI200**,-1A*	G*VC960803BNA*	28,000	14.50	12.00	27,000	20,200	28,000	8.50	16,200	855	7995191	
	CHPF3642C6C*+MBVCI200**,-1A*+TXV	G*VC960803BNA*	28,000	15.00	12.50	27,000	20,200	28,000	8.50	16,200	855	7995192	
	CHPF3642C6C*+MBVCI1600**,-1A*	G*VC960803BNA*	28,000	14.50	12.00	27,000	20,200	28,000	8.50	16,200	855	7995193	
	CHPF3642C6C*+MBVCI1600**,-1A*+TXV	G*VC960803BNA*	28,000	15.00	12.50	27,000	20,200	28,000	8.50	16,200	855	7995194	
	CHPF3642C6C*+TXV	A*VC80805C*B*	28,000	15.00	12.50	27,000	20,200	28,000	8.20	16,200	880	7995195	
	CHPF3642C6C*+TXV	A*VC960804CNA*	28,200	15.00	12.50	27,200	20,400	28,400	8.50	16,400	940	7995196	
	CHPF3642C6C*+TXV	A*VC961005CNA*	28,000	15.00	12.50	27,000	20,200	28,000	8.20	16,200	865	7995197	
	CHPF3642C6C*+TXV	G*VC80805C*B*	28,000	15.00	12.50	27,000	20,200	28,000	8.20	16,200	880	7995198	
	CHPF3642C6C*+TXV	G*VC960804CNA*	28,200	15.00	12.50	27,200	20,400	28,400	8.50	16,400	940	7995199	
	CHPF3642C6C*+TXV	G*VC961005CNA*	28,000	15.00	12.50	27,000	20,200	28,000	8.20	16,200	865	7995200	
	CHPF3743C6B*+EEP+TXV	G*VC961005CNA*	28,000	14.00	11.50	27,000	20,200	28,000	8.20	17,000	870	7995207	
CSCF3642N6D*	A*EC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	1,020	7995233		
CSCF3642N6D*	A*EC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	990	7995234		
CSCF3642N6D*	A*EH800603B*A*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,200	860	7995235		
CSCF3642N6D*	A*VC80604B*B*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,200	995	7995236		
CSCF3642N6D*	A*VC80805C*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200	880	7995237		
CSCF3642N6D*	A*VC960403BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	1,000	7995238		
CSCF3642N6D*	A*VC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400	910	7995239		
CSCF3642N6D*	A*VC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400	920	7995240		
CSCF3642N6D*	A*VC960804CNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,400	940	7995241		
CSCF3642N6D*	A*VC961005CNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200	865	7995242		
CSCF3642N6D*	G*E80603B*B*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,200	860	7995243		
CSCF3642N6D*	G*EC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	1,020	7995244		
CSCF3642N6D*	G*EC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	990	7995245		
CSCF3642N6D*	G*VC80604B*B*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600	995	7995246		
CSCF3642N6D*	G*VC80805C*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200	880	7995247		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TVA TOTAL	SENS. <sup>3</sup>	HJ <sup>4</sup>		
GSZ14 0301K* (cont.)	CSCF3642N6D*	G*VC960403BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,600
	CSCF3642N6D*	G*VC960603BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*	G*VC960803BNA*	28,400	14.00	11.50	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*	G*VC960804CNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*	G*VC961005CNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+EEP+TXV		28,000	14.00	11.50	27,000	20,200	28,800	8.20	17,000
	CSCF3642N6D*+MBVC1200**_1A*		28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+MBVC1200**_1A*+TXV		28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+MBVC1600**_1A*		28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+MBVC1600**_1A*+TXV		28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+TXV	A*EC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600
	CSCF3642N6D*+TXV	A*EC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600
	CSCF3642N6D*+TXV	A*EH800603B*A*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+TXV	A*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600
	CSCF3642N6D*+TXV	A*VC80805C*B*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200
	CSCF3642N6D*+TXV	A*VC960403BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600
	CSCF3642N6D*+TXV	A*VC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*+TXV	A*VC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*+TXV	A*VC960804CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,400
	CSCF3642N6D*+TXV	A*VC961005CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200
CSCF3642N6D*+TXV	G*E80603B*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,200	
CSCF3642N6D*+TXV	G*EC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	
CSCF3642N6D*+TXV	G*EC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	
CSCF3642N6D*+TXV	G*VC80604B*B*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	
CSCF3642N6D*+TXV	G*VC80805C*B*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200	
CSCF3642N6D*+TXV	G*VC960403BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	
CSCF3642N6D*+TXV	G*VC960603BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,600	
CSCF3642N6D*+TXV	G*VC960803BNA*	28,400	14.50	12.00	27,400	20,600	28,200	8.50	16,400	
CSCF3642N6D*+TXV	G*VC960804CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,400	
CSCF3642N6D*+TXV	G*VC961005CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200	
CSCF3642N6D*+TXV	G*VC960804CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,400	
CSCF3642N6D*+TXV	G*VC961005CNA*	28,400	15.00	12.50	27,400	20,600	28,200	8.50	16,200	
GSZ14 0361K*	ARUF37C14A*+TXV		34,600	14.00	11.50	33,400	25,000	32,800	8.20	19,000
	ARUF37D14A*		34,400	14.00	11.50	33,200	24,800	32,800	8.20	20,000
	AVPTC36C14A*		34,400	14.00	11.50	33,200	24,800	32,600	8.20	20,000
	CA*F3137*6A*+TXV	A*EC960603BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
	CA*F3137*6A*+TXV	A*EC960803BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
	CA*F3137*6A*+TXV	A*EH800603B*A*	34,600	14.00	11.50	33,400	25,000	32,200	8.20	19,600
	CA*F3137*6A*+TXV	A*VC80604B*B*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
	CA*F3137*6A*+TXV	A*VC960403BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
	CA*F3137*6A*+TXV	A*VC960603BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
	CA*F3137*6A*+TXV	A*VC960803BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600
CA*F3137*6A*+TXV	G*E80603B*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.20	19,600	
CA*F3137*6A*+TXV	G*EC960603BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	
CA*F3137*6A*+TXV	G*EC960803BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>^</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>^</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0361K* (cont.)	CA*F3137*6A**+TXV	G*VC80604B*B*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	1,100	7995266	
	CA*F3137*6A**+TXV	G*VC960403BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	1,080	7995267	
	CA*F3137*6A**+TXV	G*VC960603BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	1,060	7995268	
	CA*F3137*6A**+TXV	G*VC960803BNA*	34,600	14.00	11.50	33,400	25,000	32,000	8.20	19,600	1,100	7995269	
	CA*F4860*6D*	A*EC961004CNA*	35,600	14.00	11.50	34,200	25,800	32,800	8.50	20,000	1,200	7995286	
	CA*F4860*6D*	A*EH800805C*A*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,030	7995287	
	CA*F4860*6D*	A*EH801005C*A*	35,600	14.00	11.50	34,200	25,800	32,200	8.50	20,000	1,090	7995288	
	CA*F4860*6D*	A*VC80805C*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,070	7995289	
	CA*F4860*6D*	A*VC81005C*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,070	7995290	
	CA*F4860*6D*	A*VC960804CNA*	34,800	14.00	11.50	33,600	25,200	32,400	8.50	20,000	1,080	7995291	
	CA*F4860*6D*	A*VC961005CNA*	34,800	14.00	11.50	33,600	25,200	32,400	8.50	20,000	1,100	7995292	
	CA*F4860*6D*	G*E80805C*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,030	7995293	
	CA*F4860*6D*	G*E81005C*B*	35,600	14.00	11.50	34,200	25,800	32,200	8.50	20,000	1,090	7995294	
	CA*F4860*6D*	G*EC961004CNA*	35,600	14.00	11.50	34,200	25,800	32,800	8.50	20,000	1,200	7995295	
	CA*F4860*6D*	G*VC80805C*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,070	7995296	
	CA*F4860*6D*	G*VC81005C*B*	34,600	14.00	11.50	33,400	25,000	32,200	8.50	20,000	1,070	7995297	
	CA*F4860*6D*	G*VC960804CNA*	34,800	14.00	11.50	33,600	25,200	32,400	8.50	20,000	1,080	7995298	
	CA*F4860*6D*	G*VC961005CNA*	34,800	14.00	11.50	33,600	25,200	32,400	8.50	20,000	1,100	7995299	
	CA*F4860*6D**+MBVC2000**-1A*		35,600	14.50	12.00	34,200	25,800	32,800	9.00	20,000	1,160	7995270	
	CA*F4860*6D**+MBVC2000**-1A**+TXV		35,600	15.00	12.50	34,200	25,800	32,800	9.00	20,000	1,160	7995271	
	CA*F4860*6D**+TXV	A*EC961004CNA*	35,600	14.50	12.00	34,200	25,800	32,800	8.50	20,000	1,200	7995272	
	CA*F4860*6D**+TXV	A*EH800805C*A*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,030	7995273	
	CA*F4860*6D**+TXV	A*EH801005C*A*	35,600	14.50	12.00	34,200	25,800	32,200	8.50	20,000	1,090	7995274	
	CA*F4860*6D**+TXV	A*VC80805C*B*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,070	7995275	
	CA*F4860*6D**+TXV	A*VC81005C*B*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,070	7995276	
	CA*F4860*6D**+TXV	A*VC960804CNA*	34,800	14.50	12.00	33,600	25,200	32,400	8.50	20,000	1,080	7995277	
	CA*F4860*6D**+TXV	A*VC961005CNA*	34,800	14.50	12.00	33,600	25,200	32,400	8.50	20,000	1,100	7995278	
	CA*F4860*6D**+TXV	G*E80805C*B*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,030	7995279	
CA*F4860*6D**+TXV	G*E81005C*B*	35,600	14.50	12.00	34,200	25,800	32,200	8.50	20,000	1,090	7995280		
CA*F4860*6D**+TXV	G*EC961004CNA*	35,600	14.50	12.00	34,200	25,800	32,800	8.50	20,000	1,200	7995281		
CA*F4860*6D**+TXV	G*VC80805C*B*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,070	7995282		
CA*F4860*6D**+TXV	G*VC81005C*B*	34,600	14.50	12.00	33,400	25,000	32,200	8.50	20,000	1,070	7995283		
CA*F4860*6D**+TXV	G*VC960804CNA*	34,800	14.50	12.00	33,600	25,200	32,400	8.50	20,000	1,080	7995284		
CA*F4860*6D**+TXV	G*VC961005CNA*	34,800	14.50	12.00	33,600	25,200	32,400	8.50	20,000	1,100	7995285		
CA*F4961*6D*	A*EC961205DNA*	35,000	14.50	11.50	33,800	25,200	32,600	8.50	20,000	1,045	7995310		
CA*F4961*6D*	A*VC961205DNA*	34,800	14.50	12.00	33,600	25,200	32,600	8.50	20,000	1,050	7995311		
CA*F4961*6D*	G*E80805D*A*	35,600	14.50	11.50	34,200	25,800	33,000	8.50	20,000	1,275	7995312		
CA*F4961*6D*	G*EC961205DNA*	35,000	14.50	11.50	33,800	25,200	32,600	8.50	20,000	1,045	7995313		
CA*F4961*6D*	G*VC961205DNA*	34,800	14.50	12.00	33,600	25,200	32,600	8.50	20,000	1,050	7995314		
CA*F4961*6D*	A*EH800805D*A*	35,600	14.50	11.50	34,200	25,800	33,000	8.50	20,000	1,275	7999168		
CA*F4961*6D**+EEP+TXV		35,400	14.00	11.50	34,000	25,600	33,200	8.20	20,600	1,070	7995300		
CA*F4961*6D**+MBVC1200**-1A*		35,600	14.50	12.00	34,200	25,800	32,400	8.50	20,000	1,050	7995301		
CA*F4961*6D**+MBVC1200**-1A**+TXV		35,600	15.00	12.50	34,200	25,800	32,400	8.50	20,000	1,050	7995302		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^			TVA RATINGS ^			HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 0361K* (cont.)	CA *F4961*6D**MBVC1600**_1A*		35,600	14.50	12.00	34,200	25,800	25,800	32,400	8.50	20,000	1,075	7995303
	CA *F4961*6D**MBVC1600**_1A**TXV		35,600	15.00	12.50	34,200	25,800	25,800	32,400	8.50	20,000	1,075	7995304
	CA *F4961*6D**TXV	A*EC961205DNA*	35,000	15.00	12.00	33,800	25,200	25,200	32,600	8.50	20,000	1,045	7995305
	CA *F4961*6D**TXV	A*VC961205DNA*	34,800	15.00	12.50	33,600	25,200	25,200	32,600	8.50	20,000	1,050	7995306
	CA *F4961*6D**TXV	G*E80805D*A*	35,600	15.00	12.00	34,200	25,800	25,800	33,000	8.50	20,000	1,275	7995307
	CA *F4961*6D**TXV	G*EC961205DNA*	35,000	15.00	12.00	33,800	25,200	25,200	32,600	8.50	20,000	1,045	7995308
	CA *F4961*6D**TXV	G*VC961205DNA*	34,800	15.00	12.50	33,600	25,200	25,200	32,600	8.50	20,000	1,050	7995309
	CA *F4961*6D**TXV	A*EH800805D*A*	35,600	15.00	12.00	34,200	25,800	25,800	33,000	8.50	20,000	1,275	7999167
	CHPF3743C6B*	A*EC961004CNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,800	8.50	20,000	1,200	7995329
	CHPF3743C6B*	A*EH800805C*A*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,030	7995330
	CHPF3743C6B*	A*EH801005C*A*	34,600	14.00	11.50	33,400	25,000	25,000	32,800	8.50	20,000	1,030	7995331
	CHPF3743C6B*	A*VC80805C*B*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,070	7995332
	CHPF3743C6B*	A*VC81005C*B*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,070	7995333
	CHPF3743C6B*	A*VC960804CNA*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,080	7995334
	CHPF3743C6B*	A*VC961005CNA*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,100	7995335
	CHPF3743C6B*	G*E80805C*B*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,030	7995336
	CHPF3743C6B*	G*E81005C*B*	34,600	14.00	11.50	33,400	25,000	25,000	32,800	8.50	20,000	1,030	7995337
	CHPF3743C6B*	G*EC961004CNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,800	8.50	20,000	1,200	7995338
	CHPF3743C6B*	A*EH800805C*A*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,070	7995339
	CHPF3743C6B*	A*EH801005C*A*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,070	7995340
CHPF3743C6B*	A*VC80805C*B*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,080	7995341	
CHPF3743C6B*	G*VC81005C*B*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,100	7995342	
CHPF3743C6B*	G*VC960804CNA*	34,600	14.00	11.50	33,400	25,000	25,000	32,000	8.50	20,000	1,080	7995026	
CHPF3743C6B**EHP+TXV	G*VC961005CNA*	34,600	14.00	11.50	33,400	25,000	25,000	33,000	8.50	20,000	1,200	7995315	
CHPF3743C6B**TXV	A*EC961004CNA*	35,000	14.50	12.00	33,800	25,200	25,200	32,800	8.50	20,000	1,200	7995316	
CHPF3743C6B**TXV	A*EH800805C*A*	35,000	14.50	12.00	33,800	25,200	25,200	32,000	8.50	20,000	1,030	7995317	
CHPF3743C6B**TXV	A*EH801005C*A*	34,600	14.50	12.00	33,400	25,000	25,000	32,800	8.50	20,000	1,030	7995318	
CHPF3743C6B**TXV	A*VC80805C*B*	35,000	14.50	12.00	33,800	25,200	25,200	32,000	8.50	20,000	1,070	7995319	
CHPF3743C6B**TXV	A*VC81005C*B*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,070	7995320	
CHPF3743C6B**TXV	A*VC960804CNA*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,080	7995321	
CHPF3743C6B**TXV	A*VC961005CNA*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,100	7995322	
CHPF3743C6B**TXV	G*E80805C*B*	35,000	14.50	12.00	33,800	25,200	25,200	32,000	8.50	20,000	1,030	7995323	
CHPF3743C6B**TXV	G*E81005C*B*	34,600	14.50	12.00	33,400	25,000	25,000	32,800	8.50	20,000	1,030	7995324	
CHPF3743C6B**TXV	G*EC961004CNA*	35,000	14.50	12.00	33,800	25,200	25,200	32,800	8.50	20,000	1,200	7995325	
CHPF3743C6B**TXV	G*VC80805C*B*	35,000	14.50	12.00	33,800	25,200	25,200	32,000	8.50	20,000	1,070	7995326	
CHPF3743C6B**TXV	G*VC81005C*B*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,070	7995327	
CHPF3743C6B**TXV	G*VC960804CNA*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,080	7995328	
CHPF3743C6B**TXV	G*VC961005CNA*	34,600	14.50	12.00	33,400	25,000	25,000	32,000	8.50	20,000	1,100	7995329	
CHPF4860D6D*	A*EC961205DNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,045	7995352	
CHPF4860D6D*	A*VC961205DNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,050	7995353	
CHPF4860D6D*	G*E80805D*A*	35,600	14.00	11.50	34,200	25,800	25,800	32,800	8.50	20,000	1,275	7995354	
CHPF4860D6D*	G*EC961205DNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,045	7995355	
CHPF4860D6D*	G*VC961205DNA*	35,000	14.00	11.50	33,800	25,200	25,200	32,000	8.50	20,000	1,050	7995356	
CHPF4860D6D*	A*EH800805D*A*	35,600	14.00	11.50	34,200	25,800	25,800	32,800	8.50	20,000	1,275	7999172	

See Notes on Page 42.



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^			TVA RATINGS ^			HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 0361K* (cont.)	CHPF4860D6D*+MBVC1600**1A*		35,400	14.50	12.00	34,000	25,600	25,600	32,400	8.50	20,000	1,075	7995343
	CHPF4860D6D*+MBVC1600**1A*+TXV		35,400	15.00	12.50	34,000	26,200	25,600	32,400	8.50	20,000	1,075	7995344
	CHPF4860D6D*+MBVC2000**1A*		36,000	14.50	12.00	34,600	26,600	26,000	32,600	8.50	20,000	1,275	7995345
	CHPF4860D6D*+MBVC2000**1A*+TXV		36,000	15.00	12.50	34,600	26,600	26,000	32,600	8.50	20,000	1,275	7995346
	CHPF4860D6D*+TXV	A*EC961205DNA*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,045	7995347
	CHPF4860D6D*+TXV	A*VC961205DNA*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995348
	CHPF4860D6D*+TXV	G*E80805D*A*	35,600	14.50	12.00	34,200	26,400	25,800	32,800	8.50	20,000	1,275	7995349
	CHPF4860D6D*+TXV	G*EC961205DNA*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,045	7995350
	CHPF4860D6D*+TXV	G*VC961205DNA*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995351
	CHPF4860D6D*+TXV	A*EH800805D*A*	35,600	14.50	12.00	34,200	26,400	25,800	32,800	8.50	20,000	1,275	7999170
	CSCF4860N6D*	A*EC961004CNA*	35,600	14.00	11.50	34,200	26,400	25,800	32,800	8.50	20,000	1,230	7995382
	CSCF4860N6D*	A*EC961205DNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,045	7995383
	CSCF4860N6D*	A*EH800805C*A*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,030	7995384
	CSCF4860N6D*	A*EH801005C*A*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,030	7995385
	CSCF4860N6D*	A*VC80805C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995386
	CSCF4860N6D*	A*VC81005C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995387
	CSCF4860N6D*	A*VC960804CNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,080	7995388
	CSCF4860N6D*	A*VC961005CNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,100	7995389
	CSCF4860N6D*	A*VC961205DNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995390
	CSCF4860N6D*	G*E80805C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,030	7995391
CSCF4860N6D*	G*E80805D*A*	35,600	14.00	11.50	34,200	26,400	25,800	32,800	8.50	20,000	1,275	7995392	
CSCF4860N6D*	G*E81005C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,800	8.50	20,000	1,030	7995393	
CSCF4860N6D*	G*EC961004CNA*	35,600	14.00	11.50	34,200	26,400	25,800	32,800	8.50	20,000	1,230	7995394	
CSCF4860N6D*	G*EC961205DNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,045	7995395	
CSCF4860N6D*	G*VC80805C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995396	
CSCF4860N6D*	G*VC81005C*B*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995397	
CSCF4860N6D*	G*VC960804CNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,080	7995398	
CSCF4860N6D*	G*VC961005CNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,100	7995399	
CSCF4860N6D*	G*VC961205DNA*	35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995400	
CSCF4860N6D*	A*EH800805D*A*	35,600	14.00	11.50	34,200	26,400	25,800	32,800	8.50	20,000	1,275	7999175	
CSCF4860N6D*+EEP+TXV		34,600	14.00	11.50	33,400	25,600	25,000	33,000	8.20	20,000	1,080	7995027	
CSCF4860N6D*+MBVC1200**1A*		35,000	14.00	11.50	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995357	
CSCF4860N6D*+MBVC1200**1A*+TXV		35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,050	7995358	
CSCF4860N6D*+MBVC1600**1A*		35,400	14.50	12.00	34,000	26,200	25,600	32,400	8.50	20,000	1,075	7995359	
CSCF4860N6D*+MBVC1600**1A*+TXV		35,400	15.00	12.50	34,000	26,200	25,600	32,400	8.50	20,000	1,075	7995360	
CSCF4860N6D*+MBVC2000**1A*		36,000	14.50	12.00	34,600	26,600	26,000	32,600	8.50	20,000	1,275	7995361	
CSCF4860N6D*+MBVC2000**1A*+TXV		36,000	15.00	12.50	34,600	26,600	26,000	32,600	8.50	20,000	1,275	7995362	
CSCF4860N6D*+TXV	A*EC961004CNA*	35,600	14.50	12.00	34,200	26,400	25,800	32,800	8.50	20,000	1,230	7995363	
CSCF4860N6D*+TXV	A*EC961205DNA*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,045	7995364	
CSCF4860N6D*+TXV	A*EH800805C*A*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,030	7995365	
CSCF4860N6D*+TXV	A*EH801005C*A*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,030	7995366	
CSCF4860N6D*+TXV	A*VC80805C*B*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995367	
CSCF4860N6D*+TXV	A*VC81005C*B*	35,000	14.50	12.00	33,800	26,000	25,200	32,000	8.50	20,000	1,070	7995368	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>^</sup>				TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>^</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 0361K* (cont.)	CSCF4860N6D*+TXV	A*VC960804CNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,080	7995369	
	CSCF4860N6D*+TXV	A*VC961005CNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,100	7995370	
	CSCF4860N6D*+TXV	A*VC961205DNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,050	7995371	
	CSCF4860N6D*+TXV	G*E80805C*B*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,030	7995372	
	CSCF4860N6D*+TXV	G*E80805D*A*	35,600	26,400	14.50	12.00	34,200	25,800	32,800	8.50	20,000	1,275	7995373	
	CSCF4860N6D*+TXV	G*E81005C*B*	35,000	26,000	14.50	12.00	33,800	25,200	32,800	8.50	20,000	1,030	7995374	
	CSCF4860N6D*+TXV	G*EC961004CNA*	35,600	26,400	14.50	12.00	34,200	25,800	32,800	8.50	20,000	1,230	7995375	
	CSCF4860N6D*+TXV	G*EC961205DNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,045	7995376	
	CSCF4860N6D*+TXV	G*VC80805C*B*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,070	7995377	
	CSCF4860N6D*+TXV	G*VC81005C*B*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,070	7995378	
	CSCF4860N6D*+TXV	G*VC960804CNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,080	7995379	
	CSCF4860N6D*+TXV	G*VC961005CNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,100	7995380	
	CSCF4860N6D*+TXV	G*VC961205DNA*	35,000	26,000	14.50	12.00	33,800	25,200	32,000	8.50	20,000	1,050	7995381	
	CSCF4860N6D*+TXV	A*EH80805D*A*	35,600	26,400	14.50	12.00	34,200	25,800	32,800	8.50	20,000	1,275	7999173	
	ARUF43C14A*+TXV		39,000	29,600	14.00	11.50	37,600	29,000	40,000	8.20	24,000	1,300	7995401	
	ARUF47D14A*		39,000	29,600	14.00	11.50	37,600	29,000	39,000	8.20	24,000	1,325	7995402	
	AVPTC42D14A*		39,500	30,000	15.00	12.50	38,000	29,400	39,000	8.50	23,000	1,220	7995403	
CA*F4860*6D*	A*EC961004CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,230	7995428		
CA*F4860*6D*	A*EC961205DNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,300	7995429		
CA*F4860*6D*	A*EH80805C*A*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,325	7995430		
CA*F4860*6D*	A*EH801005C*A*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,225	7995431		
CA*F4860*6D*	A*VC80805C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,240	7995432		
CA*F4860*6D*	A*VC81005C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,250	7995433		
CA*F4860*6D*	A*VC960804CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,310	7995434		
CA*F4860*6D*	A*VC961005CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,300	7995435		
CA*F4860*6D*	A*VC961205DNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,250	7995436		
CA*F4860*6D*	G*E80805C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,325	7995437		
CA*F4860*6D*	G*E80805D*A*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,280	7995438		
CA*F4860*6D*	G*E81005C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,225	7995439		
CA*F4860*6D*	G*EC961004CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,230	7995440		
CA*F4860*6D*	G*EC961205DNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,300	7995441		
CA*F4860*6D*	G*VC80805C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,240	7995442		
CA*F4860*6D*	G*VC81005C*B*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,250	7995443		
CA*F4860*6D*	G*VC960804CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,310	7995444		
CA*F4860*6D*	G*VC961005CNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,300	7995445		
CA*F4860*6D*	G*VC961205DNA*	39,500	30,000	14.00	11.50	38,000	29,400	39,000	8.50	23,600	1,250	7995446		
CA*F4860*6D*	A*EH80805D*A*	39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.50	23,600	1,280	7999178		
CA*F4860*6D*+EFP+TXV		39,500	30,000	14.00	11.50	38,000	29,400	39,500	8.20	24,000	1,300	7995404		
CA*F4860*6D*+MBVC1600**-.1A*		40,000	30,400	14.50	12.00	38,500	29,600	39,000	8.50	23,600	1,300	7995405		
CA*F4860*6D*+MBVC1600**-.1A*+TXV		40,000	30,400	15.00	12.50	38,500	29,600	39,000	8.50	23,600	1,300	7995406		
CA*F4860*6D*+MBVC2000**-.1A*		40,500	30,800	14.50	12.00	39,000	30,000	39,000	9.00	23,600	1,310	7995407		
CA*F4860*6D*+MBVC2000**-.1A*+TXV		40,500	30,800	15.00	12.50	39,000	30,000	39,000	9.00	23,600	1,310	7995408		
CA*F4860*6D*+TXV	A*EC961004CNA*	39,500	30,000	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,230	7995409		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>			
GSZ14 04Z1K* (cont.)	CA *F4860 *6D *+TXV	A*EC961205DNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,300	7995410	
	CA *F4860 *6D *+TXV	A*EH800805C*A*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,325	7995411	
	CA *F4860 *6D *+TXV	A*EH801005C*A*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,225	7995412	
	CA *F4860 *6D *+TXV	A*VC80805C*B*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,240	7995413	
	CA *F4860 *6D *+TXV	A*VC81005C*B*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995414	
	CA *F4860 *6D *+TXV	A*VC960804CNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,310	7995415	
	CA *F4860 *6D *+TXV	A*VC961005CNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,300	7995416	
	CA *F4860 *6D *+TXV	A*VC961205DNA*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995417	
	CA *F4860 *6D *+TXV	G*E80805C*B*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,325	7995418	
	CA *F4860 *6D *+TXV	G*E80805D*A*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7995419	
	CA *F4860 *6D *+TXV	G*E81005C*B*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,225	7995420	
	CA *F4860 *6D *+TXV	G*EC961004CNA*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,230	7995421	
	CA *F4860 *6D *+TXV	G*EC961205DNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,300	7995422	
	CA *F4860 *6D *+TXV	G*VC80805C*B*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,240	7995423	
	CA *F4860 *6D *+TXV	G*VC81005C*B*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995424	
	CA *F4860 *6D *+TXV	G*VC960804CNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,310	7995425	
	CA *F4860 *6D *+TXV	G*VC961005CNA*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,300	7995426	
	CA *F4860 *6D *+TXV	G*VC961205DNA*	39,500	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995427	
	CA *F4860 *6D *+TXV	A*EH800805D*A*	39,500	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7999176	
	CA *F4961 *6D *	A*EC961004CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,230	7995471	
	CA *F4961 *6D *	A*EC961205DNA*	40,000	14.50	12.00	38,500	29,600	40,000	8.50	24,000	1,300	7995472	
	CA *F4961 *6D *	A*EH800805C*A*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,325	7995473	
	CA *F4961 *6D *	A*EH801005C*A*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,225	7995474	
	CA *F4961 *6D *	A*VC80805C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,240	7995475	
	CA *F4961 *6D *	A*VC81005C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,250	7995476	
	CA *F4961 *6D *	A*VC960804CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,310	7995477	
	CA *F4961 *6D *	A*VC961005CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,300	7995478	
	CA *F4961 *6D *	A*VC961205DNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,250	7995479	
	CA *F4961 *6D *	G*E80805C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,325	7995480	
	CA *F4961 *6D *	G*E80805D*A*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,280	7995481	
	CA *F4961 *6D *	G*E81005C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,225	7995482	
	CA *F4961 *6D *	G*EC961004CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,230	7995483	
CA *F4961 *6D *	G*EC961205DNA*	40,000	14.50	12.00	38,500	29,600	40,000	8.50	24,000	1,300	7995484		
CA *F4961 *6D *	G*VC80805C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,240	7995485		
CA *F4961 *6D *	G*VC81005C*B*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,250	7995486		
CA *F4961 *6D *	G*VC960804CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,310	7995487		
CA *F4961 *6D *	G*VC961005CNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,300	7995488		
CA *F4961 *6D *	G*VC961205DNA*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,250	7995489		
CA *F4961 *6D *	A*EH800805D*A*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,280	7999181		
CA *F4961 *6D *+EEP+TXV	CA *F4961 *6D *+MBVC1600**-.1A*	40,000	14.00	12.00	38,500	29,600	40,000	8.50	24,000	1,300	7995447		
CA *F4961 *6D *+MBVC1600**-.1A*	CA *F4961 *6D *+MBVC1600**-.1A*	40,000	14.50	12.00	38,500	29,600	39,500	8.50	23,800	1,300	7995448		
CA *F4961 *6D *+MBVC2000**-.1A*	CA *F4961 *6D *+MBVC2000**-.1A*	40,500	15.00	12.50	38,500	29,600	39,500	9.00	23,800	1,300	7995449		
CA *F4961 *6D *+MBVC2000**-.1A*	CA *F4961 *6D *+MBVC2000**-.1A*	40,500	14.50	12.00	39,000	30,000	39,000	9.00	23,800	1,310	7995450		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^			TVA RATINGS ^			HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HJ <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 04Z1K* (cont.)	CA*F4961*6D*+MBVC2000**_1A*+TXV	A*EC961004CNA*	40,500	30,800	15.00	12.50	39,000	30,000	39,000	9.00	23,800	1,310	7995451
	CA*F4961*6D*+TXV	A*EC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,230	7995452
	CA*F4961*6D*+TXV	A*EC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	40,000	8.50	24,000	1,300	7995453
	CA*F4961*6D*+TXV	A*EH800805C*A*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,325	7995454
	CA*F4961*6D*+TXV	A*EH801005C*A*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,225	7995455
	CA*F4961*6D*+TXV	A*VC80805C*FB*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,240	7995456
	CA*F4961*6D*+TXV	A*VC81005C*FB*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,250	7995457
	CA*F4961*6D*+TXV	A*VC960804CNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,310	7995458
	CA*F4961*6D*+TXV	A*VC961005CNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,300	7995459
	CA*F4961*6D*+TXV	A*VC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,250	7995460
	CA*F4961*6D*+TXV	G*E80805C*B*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,325	7995461
	CA*F4961*6D*+TXV	G*E80805D*A*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,280	7995462
	CA*F4961*6D*+TXV	G*E81005C*B*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,225	7995463
	CA*F4961*6D*+TXV	G*EC961004CNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,230	7995464
	CA*F4961*6D*+TXV	G*EC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	40,000	8.50	24,000	1,300	7995465
	CA*F4961*6D*+TXV	G*VC80805C*FB*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,240	7995466
	CA*F4961*6D*+TXV	G*VC81005C*FB*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,250	7995467
	CA*F4961*6D*+TXV	G*VC960804CNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,310	7995468
	CA*F4961*6D*+TXV	G*VC961005CNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,300	7995469
	CA*F4961*6D*+TXV	G*VC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,250	7995470
	CA*F4961*6D*+TXV	A*EH800805D*A*	40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,800	1,280	7999180
	CHPF4860D6D*	A*EC961205DNA*	40,000	30,400	14.00	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995500
	CHPF4860D6D*	A*VC961205DNA*	39,500	30,000	14.00	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995501
	CHPF4860D6D*	G*E80805D*A*	39,500	30,000	14.00	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7995502
	CHPF4860D6D*	G*EC961205DNA*	40,000	30,400	14.00	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995503
	CHPF4860D6D*	G*VC961205DNA*	39,500	30,000	14.00	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995504
	CHPF4860D6D*	A*EH800805D*A*	39,500	30,000	14.00	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7999184
	CHPF4860D6D*+EEP+TXV		39,000	29,600	14.00	11.50	37,600	29,000	39,500	8.50	24,000	1,300	7995490
	CHPF4860D6D*+MBVC1600**_1A*		40,000	30,400	14.50	12.00	38,500	29,600	39,000	8.50	23,600	1,300	7995491
	CHPF4860D6D*+MBVC1600**_1A*+TXV		40,000	30,400	15.00	12.50	38,500	29,600	39,000	8.50	23,600	1,300	7995492
	CHPF4860D6D*+MBVC2000**_1A*		40,000	30,400	14.50	12.00	38,500	29,600	39,000	9.00	23,600	1,310	7995493
	CHPF4860D6D*+MBVC2000**_1A*+TXV	A*EC961205DNA*	40,000	30,400	15.00	12.50	38,500	29,600	39,000	9.00	23,600	1,310	7995494
CHPF4860D6D*+TXV	A*VC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995495	
CHPF4860D6D*+TXV	G*E80805D*A*	39,500	30,000	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995496	
CHPF4860D6D*+TXV	G*E80805D*A*	39,500	30,000	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7995497	
CHPF4860D6D*+TXV	G*EC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995498	
CHPF4860D6D*+TXV	G*VC961205DNA*	39,500	30,000	14.50	12.00	38,000	29,400	39,000	8.50	23,600	1,250	7995499	
CHPF4860D6D*+TXV	A*EH800805D*A*	39,500	30,000	14.50	12.00	38,000	29,400	39,500	8.50	23,600	1,280	7999183	
CSCF4860N6D*	A*EC961004CNA*	40,500	30,800	14.00	12.00	39,000	30,000	39,000	8.50	23,600	1,230	7995529	
CSCF4860N6D*	A*EC961205DNA*	40,000	30,400	14.00	12.00	38,500	29,600	40,000	8.50	23,600	1,300	7995530	
CSCF4860N6D*	A*EH800805C*A*	40,500	30,800	14.00	12.00	39,000	30,000	39,500	8.50	23,600	1,325	7995531	
CSCF4860N6D*	A*EH801005C*A*	40,500	30,800	14.00	12.00	39,000	30,000	39,000	8.50	23,600	1,225	7995532	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>				HEATING RATINGS <sup>A</sup>				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>			LOW <sup>6</sup>
GSZ14 0421K* (cont.)	CSCF4860N6D*	A*VC80805C*B*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,240	7995533
	CSCF4860N6D*	A*VC81005C*B*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995534
	CSCF4860N6D*	A*VC960804CNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,310	7995535
	CSCF4860N6D*	A*VC961005CNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995536
	CSCF4860N6D*	A*VC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995537
	CSCF4860N6D*	G*E80805C*B*	40,500	30,800	14.00	12.00	39,000	30,000	39,500	8.50	23,600	1,325	7995538
	CSCF4860N6D*	G*E80805D*A*	40,500	30,800	14.00	12.00	39,000	30,000	39,500	8.50	23,600	1,280	7995539
	CSCF4860N6D*	G*E81005C*B*	40,500	30,800	14.00	12.00	39,000	30,000	39,000	8.50	23,600	1,225	7995540
	CSCF4860N6D*	G*EC961004CNA*	40,500	30,800	14.00	12.00	39,000	30,000	39,000	8.50	23,600	1,230	7995541
	CSCF4860N6D*	G*EC961205DNA*	40,000	30,400	14.00	12.00	38,500	29,600	40,000	8.50	23,600	1,300	7995542
	CSCF4860N6D*	G*VC80805C*B*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,240	7995543
	CSCF4860N6D*	G*VC81005C*B*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995544
	CSCF4860N6D*	G*VC960804CNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,310	7995545
	CSCF4860N6D*	G*VC961005CNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995546
	CSCF4860N6D*	G*VC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995547
	CSCF4860N6D*	A*EH80805D*A*	40,500	30,800	14.00	12.00	39,000	30,000	39,500	8.50	23,600	1,280	7999188
	CSCF4860N6D*+EFP+TXV		40,500	30,800	14.00	12.00	39,000	30,000	40,000	8.50	24,000	1,300	7995505
	CSCF4860N6D*+MBVC1600**,-1A*		40,000	30,400	14.50	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995506
	CSCF4860N6D*+MBVC1600**,-1A*+TXV		40,000	30,400	15.00	12.50	38,500	29,600	39,500	8.50	23,600	1,300	7995507
	CSCF4860N6D*+MBVC2000**,-1A*		40,000	30,400	14.50	12.50	38,500	29,600	39,500	9.00	23,600	1,310	7995508
CSCF4860N6D*+MBVC2000**,-1A*+TXV		40,000	30,400	15.00	13.00	38,500	29,600	39,000	9.00	23,600	1,310	7995509	
CSCF4860N6D*+TXV	A*EC961004CNA*	40,500	30,800	14.50	12.00	39,000	30,000	39,000	8.50	23,600	1,230	7995510	
CSCF4860N6D*+TXV	A*EC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	40,000	8.50	23,600	1,300	7995511	
CSCF4860N6D*+TXV	A*EH80805C*A*	40,500	30,800	14.50	12.00	39,000	30,000	39,500	8.50	23,600	1,325	7995512	
CSCF4860N6D*+TXV	A*EH801005C*A*	40,500	30,800	14.50	12.00	39,000	30,000	39,000	8.50	23,600	1,225	7995513	
CSCF4860N6D*+TXV	A*VC80805C*B*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,240	7995514	
CSCF4860N6D*+TXV	A*VC81005C*B*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995515	
CSCF4860N6D*+TXV	A*VC960804CNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,310	7995516	
CSCF4860N6D*+TXV	A*VC961005CNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995517	
CSCF4860N6D*+TXV	A*VC961205DNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995518	
CSCF4860N6D*+TXV	G*E80805C*B*	40,500	30,800	14.50	12.00	39,000	30,000	39,500	8.50	23,600	1,325	7995519	
CSCF4860N6D*+TXV	G*E80805D*A*	40,500	30,800	14.50	12.00	39,000	30,000	39,500	8.50	23,600	1,280	7995520	
CSCF4860N6D*+TXV	G*E81005C*B*	40,500	30,800	14.50	12.00	39,000	30,000	39,000	8.50	23,600	1,225	7995521	
CSCF4860N6D*+TXV	G*EC961004CNA*	40,500	30,800	14.50	12.00	39,000	30,000	39,000	8.50	23,600	1,230	7995522	
CSCF4860N6D*+TXV	G*EC961205DNA*	40,000	30,400	14.50	12.00	38,500	29,600	40,000	8.50	23,600	1,300	7995523	
CSCF4860N6D*+TXV	G*VC80805C*B*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,240	7995524	
CSCF4860N6D*+TXV	G*VC81005C*B*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995525	
CSCF4860N6D*+TXV	G*VC960804CNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,310	7995526	
CSCF4860N6D*+TXV	G*VC961005CNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,300	7995527	
CSCF4860N6D*+TXV	G*VC961205DNA*	40,000	30,400	15.00	12.00	38,500	29,600	39,500	8.50	23,600	1,250	7995528	
CSCF4860N6D*+TXV	A*EH80805D*A*	40,500	30,800	14.50	12.00	39,000	30,000	39,500	8.50	23,600	1,280	7999186	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^			TVA RATINGS ^			HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 0481K*	ARUF61D14A*+TXV		45,000	35,600	14.00	11.50	43,500	34,800	44,500	8.50	28,000	1,555	7995548
	ASPT48D14A*		45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,525	7995028
	AVPTC48D14A*		45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,550	7995029
	CA*F4961*6D*	A*EC961205DNA*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,520	7995559
	CA*F4961*6D*	A*VC961205DNA*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,530	7995560
	CA*F4961*6D*	G*E80805D*A*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,500	7995561
	CA*F4961*6D*	G*EC961205DNA*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,520	7995562
	CA*F4961*6D*	G*VC961205DNA*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,530	7995563
	CA*F4961*6D*	A*EH800805D*A*	45,500	36,000	14.00	11.50	44,000	35,000	44,500	9.00	27,600	1,500	7999191
	CA*F4961*6D*+EEP+TXV		45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	7995549
	CA*F4961*6D*+MBVC1600**-.1A*		45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,500	7995550
	CA*F4961*6D*+MBVC1600**-.1A*+TXV		45,500	36,000	15.00	12.50	44,000	35,000	44,500	9.00	27,600	1,500	7995551
	CA*F4961*6D*+MBVC2000**-.1A*		46,000	36,400	14.50	12.00	44,500	35,400	44,500	9.00	27,600	1,570	7995552
	CA*F4961*6D*+MBVC2000**-.1A*+TXV		46,000	36,400	15.00	12.50	44,500	35,400	44,500	9.00	27,600	1,570	7995553
	CA*F4961*6D*+TXV	A*EC961205DNA*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,520	7995554
	CA*F4961*6D*+TXV	A*VC961205DNA*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,530	7995555
	CA*F4961*6D*+TXV	G*E80805D*A*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,500	7995556
	CA*F4961*6D*+TXV	G*EC961205DNA*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,520	7995557
	CA*F4961*6D*+TXV	G*VC961205DNA*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,530	7995558
	CA*F4961*6D*+TXV	A*EH800805D*A*	45,500	36,000	14.50	12.00	44,000	35,000	44,500	9.00	27,600	1,500	7999189
CHPF4860D6*	A*EC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,520	7995574	
CHPF4860D6*	A*VC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,530	7995575	
CHPF4860D6*	G*E80805D*A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	7995576	
CHPF4860D6*	G*EC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,520	7995577	
CHPF4860D6*	G*VC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,530	7995578	
CHPF4860D6*	A*EH800805D*A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	7999194	
CHPF4860D6*+EEP+TXV		45,000	35,600	14.00	11.50	43,500	34,800	44,500	9.00	27,600	1,555	7995564	
CHPF4860D6*+MBVC1600**-.1A*		45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7995565	
CHPF4860D6*+MBVC1600**-.1A*+TXV		45,000	35,600	15.00	12.50	43,500	34,800	44,000	9.00	27,600	1,500	7995566	
CHPF4860D6*+MBVC2000**-.1A*		45,500	36,000	14.50	12.00	44,000	35,000	44,000	9.00	27,600	1,570	7995567	
CHPF4860D6*+MBVC2000**-.1A*+TXV		45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	7995568	
CHPF4860D6*+TXV	A*EC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,520	7995569	
CHPF4860D6*+TXV	A*VC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,530	7995570	
CHPF4860D6*+TXV	G*E80805D*A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7995571	
CHPF4860D6*+TXV	G*EC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,520	7995572	
CHPF4860D6*+TXV	G*VC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,500	9.00	27,600	1,530	7995573	
CHPF4860D6*+TXV	A*EH800805D*A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7999192	
CSCF4860N6D*	A*EC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,520	7995589	
CSCF4860N6D*	A*VC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,520	7995590	
CSCF4860N6D*	G*E80805D*A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,530	7995591	
CSCF4860N6D*	G*EC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,520	7995592	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>				HEATING RATINGS <sup>A</sup>				CFM	AHRI #		
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>			LOW <sup>6</sup>	
GSZ14 0481K*	CSCF4860N6D*	G*VC961205DNA*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,530	7995593	
	CSCF4860N6D*	A*EH800805D*A*	45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	7999197	
	CSCF4860N6D*+EEP+TXV		45,000	35,600	14.00	11.50	43,500	34,800	45,000	9.00	27,600	1,555	7995579	
	CSCF4860N6D*+MBVC1600**_1A*		45,000	35,600	14.00	11.50	43,500	34,800	44,000	9.00	27,600	1,500	7995580	
	CSCF4860N6D*+MBVC1600**_1A*+TXV		45,000	35,600	15.00	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7995581	
	CSCF4860N6D*+MBVC2000**_1A*		45,500	36,000	14.00	12.00	44,000	35,000	44,000	9.00	27,600	1,570	7995582	
	CSCF4860N6D*+MBVC2000**_1A*+TXV		45,500	36,000	15.00	12.50	44,000	35,000	44,000	9.00	27,600	1,570	7995583	
	CSCF4860N6D*+TXV	A*EC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,520	7995584	
	CSCF4860N6D*+TXV	A*VC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,530	7995585	
	CSCF4860N6D*+TXV	G*E80805D*A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7995586	
	CSCF4860N6D*+TXV	G*EC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,520	7995587	
	CSCF4860N6D*+TXV	G*VC961205DNA*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,530	7995588	
	CSCF4860N6D*+TXV	A*EH800805D*A*	45,000	35,600	14.50	12.00	43,500	34,800	44,000	9.00	27,600	1,500	7999196	
	GSZ14 0491K*	ARUF49C14A*+TXV		44,500	33,400	14.00	11.50	43,000	32,600	46,000	8.50	27,600	1,400	7995030
		ARUF61D14A*		44,500	33,400	14.00	12.00	43,000	32,600	47,000	8.50	28,000	1,450	7995031
		AVPTC48D14A*		45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,540	7995594
CA*F4961*6D*		A*EC961004CNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,585	7995611	
CA*F4961*6D*		A*EH800805C*A*	45,500	34,200	14.00	12.00	44,000	33,400	47,000	8.50	28,000	1,515	7995612	
CA*F4961*6D*		A*EH801005C*A*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,575	7995613	
CA*F4961*6D*		A*VC960804CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,525	7995614	
CA*F4961*6D*		A*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,525	7995615	
CA*F4961*6D*		G*E80805C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,000	8.50	28,000	1,515	7995616	
CA*F4961*6D*		G*E80805D*A*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,480	7995617	
CA*F4961*6D*		G*E81005C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,575	7995618	
CA*F4961*6D*		G*EC961004CNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,585	7995619	
CA*F4961*6D*		G*VC960804CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,525	7995620	
CA*F4961*6D*		G*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,525	7995621	
CA*F4961*6D*		A*EC961205DNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,475	7996473	
CA*F4961*6D*		A*VC80805C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,510	7996474	
CA*F4961*6D*	A*VC81005C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996475		
CA*F4961*6D*	A*VC961005CNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996476		
CA*F4961*6D*	G*EC961205DNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,475	7996477		
CA*F4961*6D*	G*VC80805C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,510	7996478		
CA*F4961*6D*	G*VC81005C*B*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996479		
CA*F4961*6D*	G*VC961005CNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996480		
CA*F4961*6D*	A*EH800805D*A*	45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,480	7999200		
CA*F4961*6D*+EEP+TXV		45,000	33,800	14.00	11.50	43,500	33,000	47,500	8.50	28,600	1,600	7995595		
CA*F4961*6D*+MBVC1600**_1A*		45,500	34,200	14.50	12.00	44,000	33,400	47,000	8.50	28,000	1,500	7995596		
CA*F4961*6D*+MBVC1600**_1A*+TXV		45,500	34,200	15.00	12.20	44,000	33,400	47,000	8.50	28,000	1,500	7995597		
CA*F4961*6D*+MBVC2000**_1A*		45,500	34,200	14.50	12.20	44,000	33,400	47,000	9.00	28,000	1,570	7995598		
CA*F4961*6D*+MBVC2000**_1A*+TXV		45,500	34,200	15.00	12.50	44,000	33,400	47,000	9.00	28,000	1,570	7995599		

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>				HEATING RATINGS <sup>A</sup>				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>			LOW <sup>6</sup>
GSZ14 0491K* (cont.)	CA*F4961*6D*+TXV	A*EC961004CNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,585	7995600
	CA*F4961*6D*+TXV	A*EH800805C*A*	45,500	34,200	14.50	12.50	44,000	33,400	47,000	8.50	28,000	1,480	7995601
	CA*F4961*6D*+TXV	A*EH801005C*A*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,575	7995602
	CA*F4961*6D*+TXV	A*VC960804CNA*	45,500	34,200	15.00	12.50	44,000	33,400	47,000	8.50	28,000	1,525	7995603
	CA*F4961*6D*+TXV	A*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,525	7995604
	CA*F4961*6D*+TXV	G*E80805C*B*	45,500	34,200	14.50	12.50	44,000	33,400	47,000	8.50	28,000	1,480	7995605
	CA*F4961*6D*+TXV	G*E80805D*A*	45,500	34,200	15.00	12.50	44,000	33,400	47,000	8.50	28,000	1,480	7995606
	CA*F4961*6D*+TXV	G*E81005C*B*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,575	7995607
	CA*F4961*6D*+TXV	G*EC961004CNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,585	7995608
	CA*F4961*6D*+TXV	G*VC960804CNA*	45,500	34,200	15.00	12.20	44,000	33,400	47,000	8.50	28,000	1,525	7995609
	CA*F4961*6D*+TXV	G*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,525	7995610
	CA*F4961*6D*+TXV	A*EC961205DNA*	45,500	34,200	15.00	12.50	44,000	33,400	47,000	8.50	28,000	1,475	7996465
	CA*F4961*6D*+TXV	A*VC80805C*B*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,510	7996466
	CA*F4961*6D*+TXV	A*VC81005C*B*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,520	7996467
	CA*F4961*6D*+TXV	A*VC961005CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996468
	CA*F4961*6D*+TXV	G*EC961205DNA*	45,500	34,200	15.00	12.50	44,000	33,400	47,000	8.50	28,000	1,475	7996469
	CA*F4961*6D*+TXV	G*VC80805C*B*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,510	7996470
	CA*F4961*6D*+TXV	G*VC81005C*B*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,520	7996471
	CA*F4961*6D*+TXV	G*VC961005CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,520	7996472
	CA*F4961*6D*+TXV	A*EH800805D*A*	45,500	34,200	15.00	12.50	44,000	33,400	47,000	8.50	28,000	1,480	7999199
CHPF4860D6D*	A*EC961205DNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,520	7995632	
CHPF4860D6D*	A*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,000	8.50	28,000	1,525	7995633	
CHPF4860D6D*	G*E80805D*A*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,490	7995634	
CHPF4860D6D*	G*EC961205DNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,520	7995635	
CHPF4860D6D*	G*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,000	8.50	28,000	1,525	7995636	
CHPF4860D6D*	A*EH800805D*A*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,490	7999203	
CHPF4860D6D*+EHP+TXV		45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,600	7995622	
CHPF4860D6D*+MBVC1600**1A*		45,500	34,200	14.50	11.50	44,000	33,400	47,000	8.50	28,000	1,500	7995623	
CHPF4860D6D*+MBVC1600**1A*+TXV		45,500	34,200	15.00	12.00	44,000	33,400	47,000	8.50	28,000	1,500	7995624	
CHPF4860D6D*+MBVC2000**1A*		45,500	34,200	14.50	12.00	44,000	33,400	47,000	9.00	28,000	1,570	7995625	
CHPF4860D6D*+MBVC2000**1A*+TXV		45,500	34,200	15.00	12.50	44,000	33,400	47,000	9.00	28,000	1,570	7995626	
CHPF4860D6D*+TXV	A*EC961205DNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,520	7995627	
CHPF4860D6D*+TXV	A*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,000	8.50	28,000	1,525	7995628	
CHPF4860D6D*+TXV	G*E80805D*A*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,490	7995629	
CHPF4860D6D*+TXV	G*EC961205DNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,520	7995630	
CHPF4860D6D*+TXV	G*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,000	8.50	28,000	1,525	7995631	
CHPF4860D6D*+TXV	A*EH800805D*A*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,490	7999202	
CSCF4860N6D*	A*EC961004CNA*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,585	7995661	
CSCF4860N6D*	A*EC961205DNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,520	7995662	
CSCF4860N6D*	A*EH800805C*A*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,480	7995663	
CSCF4860N6D*	A*EH801005C*A*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,575	7995664	

See Notes on Page 42.



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>A</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>A</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>	LOW <sup>6</sup>		
GSZ14 0491K* (cont.)	CSCF4860N6D*	A*VC80805C*B*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,590	7995665
	CSCF4860N6D*	A*VC81005C*B*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,610	7995666
	CSCF4860N6D*	A*VC960804CNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,525	7995667
	CSCF4860N6D*	A*VC961005CNA*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,610	7995668
	CSCF4860N6D*	A*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,525	7995669
	CSCF4860N6D*	G*E80805C*B*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,480	7995670
	CSCF4860N6D*	G*E80805D*A*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,490	7995671
	CSCF4860N6D*	G*E81005C*B*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,575	7995672
	CSCF4860N6D*	G*EC961004CNA*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,585	7995673
	CSCF4860N6D*	G*EC961205DNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,520	7995674
	CSCF4860N6D*	G*VC80805C*B*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,590	7995675
	CSCF4860N6D*	G*VC81005C*B*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,610	7995676
	CSCF4860N6D*	G*VC960804CNA*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,525	7995677
	CSCF4860N6D*	G*VC961005CNA*	45,500	34,200	14.00	11.50	44,000	33,400	47,500	8.50	28,000	1,610	7995678
	CSCF4860N6D*	G*VC961205DNA*	45,500	34,200	14.00	12.00	44,000	33,400	47,500	8.50	28,000	1,525	7995679
	CSCF4860N6D*	A*EH80805D*A*	45,000	33,800	14.00	11.50	43,500	33,000	47,000	8.50	28,000	1,490	7999207
	CSCF4860N6D*+EFP+TXV		45,000	33,800	14.00	11.50	43,500	33,000	47,500	8.50	28,600	1,600	7995637
	CSCF4860N6D*+MBVC1600**,-1A*		45,000	33,800	14.50	11.50	43,500	33,000	47,000	8.50	28,000	1,500	7995638
	CSCF4860N6D*+MBVC1600**,-1A*+TXV		45,000	33,800	15.00	12.00	43,500	33,000	47,000	8.50	28,000	1,500	7995639
	CSCF4860N6D*+MBVC2000**,-1A*		45,500	34,200	14.50	12.00	44,000	33,400	47,000	9.00	28,000	1,570	7995640
CSCF4860N6D*+MBVC2000**,-1A*+TXV		45,500	34,200	15.00	12.50	44,000	33,400	47,000	9.00	28,000	1,570	7995641	
CSCF4860N6D*+TXV	A*EC961004CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,585	7995642	
CSCF4860N6D*+TXV	A*EC961205DNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,520	7995643	
CSCF4860N6D*+TXV	A*EH80805C*A*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,480	7995644	
CSCF4860N6D*+TXV	A*EH801005C*A*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,575	7995645	
CSCF4860N6D*+TXV	A*VC80805C*B*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,590	7995646	
CSCF4860N6D*+TXV	A*VC81005C*B*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,610	7995647	
CSCF4860N6D*+TXV	A*VC960804CNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,525	7995648	
CSCF4860N6D*+TXV	A*VC961005CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,610	7995649	
CSCF4860N6D*+TXV	A*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,525	7995650	
CSCF4860N6D*+TXV	G*E80805C*B*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,480	7995651	
CSCF4860N6D*+TXV	G*E80805D*A*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,490	7995652	
CSCF4860N6D*+TXV	G*E81005C*B*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,575	7995653	
CSCF4860N6D*+TXV	G*EC961004CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,585	7995654	
CSCF4860N6D*+TXV	G*EC961205DNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,520	7995655	
CSCF4860N6D*+TXV	G*VC80805C*B*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,590	7995656	
CSCF4860N6D*+TXV	G*VC81005C*B*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,610	7995657	
CSCF4860N6D*+TXV	G*VC960804CNA*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,525	7995658	
CSCF4860N6D*+TXV	G*VC961005CNA*	45,500	34,200	14.50	12.00	44,000	33,400	47,500	8.50	28,000	1,610	7995659	
CSCF4860N6D*+TXV	G*VC961205DNA*	45,500	34,200	14.50	12.20	44,000	33,400	47,500	8.50	28,000	1,525	7995660	
CSCF4860N6D*+TXV	A*EH80805D*A*	45,000	33,800	14.50	12.00	43,500	33,000	47,000	8.50	28,000	1,490	7999205	

See Notes on Page 42.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS <sup>1</sup>			TVA RATINGS <sup>3</sup>			HEATING RATINGS <sup>4</sup>			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI <sup>4</sup>	HSPF <sup>5</sup>	Low <sup>6</sup>		
	ASPT61D14A*		56,500	43,000	14.00	11.50	54,500	42,000	59,000	8.50	36,000	1,800	7995680
	AVPTC60D14A*		56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,745	7995032
	CA*F4961*6D**+EEP+TXV		55,500	42,000	14.00	11.50	53,500	41,000	59,000	8.50	36,600	1,600	7995681
	CA*F4961*6D**+MBVC2000**,-1A*		57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,600	1,770	7995682
	CA*F4961*6D**+MBVC2000**,-1A**+TXV		57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,600	1,770	7995683
	CA*F4961*6D**+TXV	A*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995684
	CA*F4961*6D**+TXV	A*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995685
	CA*F4961*6D**+TXV	G*E80805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,600	1,700	7995686
	CA*F4961*6D**+TXV	G*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995687
	CA*F4961*6D**+TXV	G*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995688
	CA*F4961*6D**+TXV	A*EH800805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,600	1,700	7999208
	CHPF4860D6D**+EEP+TXV		55,000	42,000	14.00	11.50	53,000	41,000	57,000	8.50	36,600	1,600	7995689
	CHPF4860D6D**+MBVC2000**,-1A*		57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	7995690
GSZ14	CHPF4860D6D**+MBVC2000**,-1A**+TXV		57,000	43,500	14.50	12.00	55,000	42,500	59,000	9.00	36,000	1,770	7995691
0601K*	CHPF4860D6D**+TXV	A*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,600	7995692
	CHPF4860D6D**+TXV	A*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,600	1,600	7995693
	CHPF4860D6D**+TXV	G*E80805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	37,000	1,700	7995694
	CHPF4860D6D**+TXV	G*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,600	7995695
	CHPF4860D6D**+TXV	G*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,600	1,600	7995696
	CHPF4860D6D**+TXV	A*EH800805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	37,000	1,700	7999210
	CSCF4860N6D**+MBVC2000**,-1A*		57,000	43,500	14.00	11.50	55,000	42,500	59,000	9.00	36,000	1,770	7995697
	CSCF4860N6D**+MBVC2000**,-1A**+TXV		57,000	43,500	14.00	12.00	55,000	42,500	59,000	9.00	36,000	1,770	7995698
	CSCF4860N6D**+TXV	A*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,600	7995699
	CSCF4860N6D**+TXV	A*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995700
	CSCF4860N6D**+TXV	G*E80805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,700	7995701
	CSCF4860N6D**+TXV	G*EC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,600	7995702
	CSCF4860N6D**+TXV	G*VC961205DNA*	56,000	42,500	14.00	11.50	54,000	41,500	58,000	8.50	36,000	1,600	7995703
	CSCF4860N6D**+TXV	A*EH800805D*A*	56,000	42,500	14.00	11.50	54,000	41,500	59,000	8.50	36,000	1,700	7999211

<sup>1</sup> Rated in accordance with ANSI/AHRI Standard 210/240

<sup>2</sup> Seasonal Energy Efficiency Ratio

<sup>3</sup> TVA Rating: BTU/h @ 75°F/63°F-95°F

<sup>4</sup> HSPF = Heating Seasonal Performance Factor

<sup>5</sup> CFM at High stage

<sup>6</sup> CFM at Intermediate and low stage

<sup>7</sup> CFM at High stage

<sup>8</sup> CFM at Intermediate and low stage

<sup>2</sup> Energy Efficiency Ratio @ 80°F/67°F/95°F

<sup>4</sup> Rated heating capacity at 47°F outdoor per AHRI 210/240


<sup>6</sup> Heating capacity at 17°F outdoor

<sup>8</sup> CFM at Intermediate and low stage

<sup>8</sup> CFM at Intermediate and low stage

**NOTES**

- Always check the S&H plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

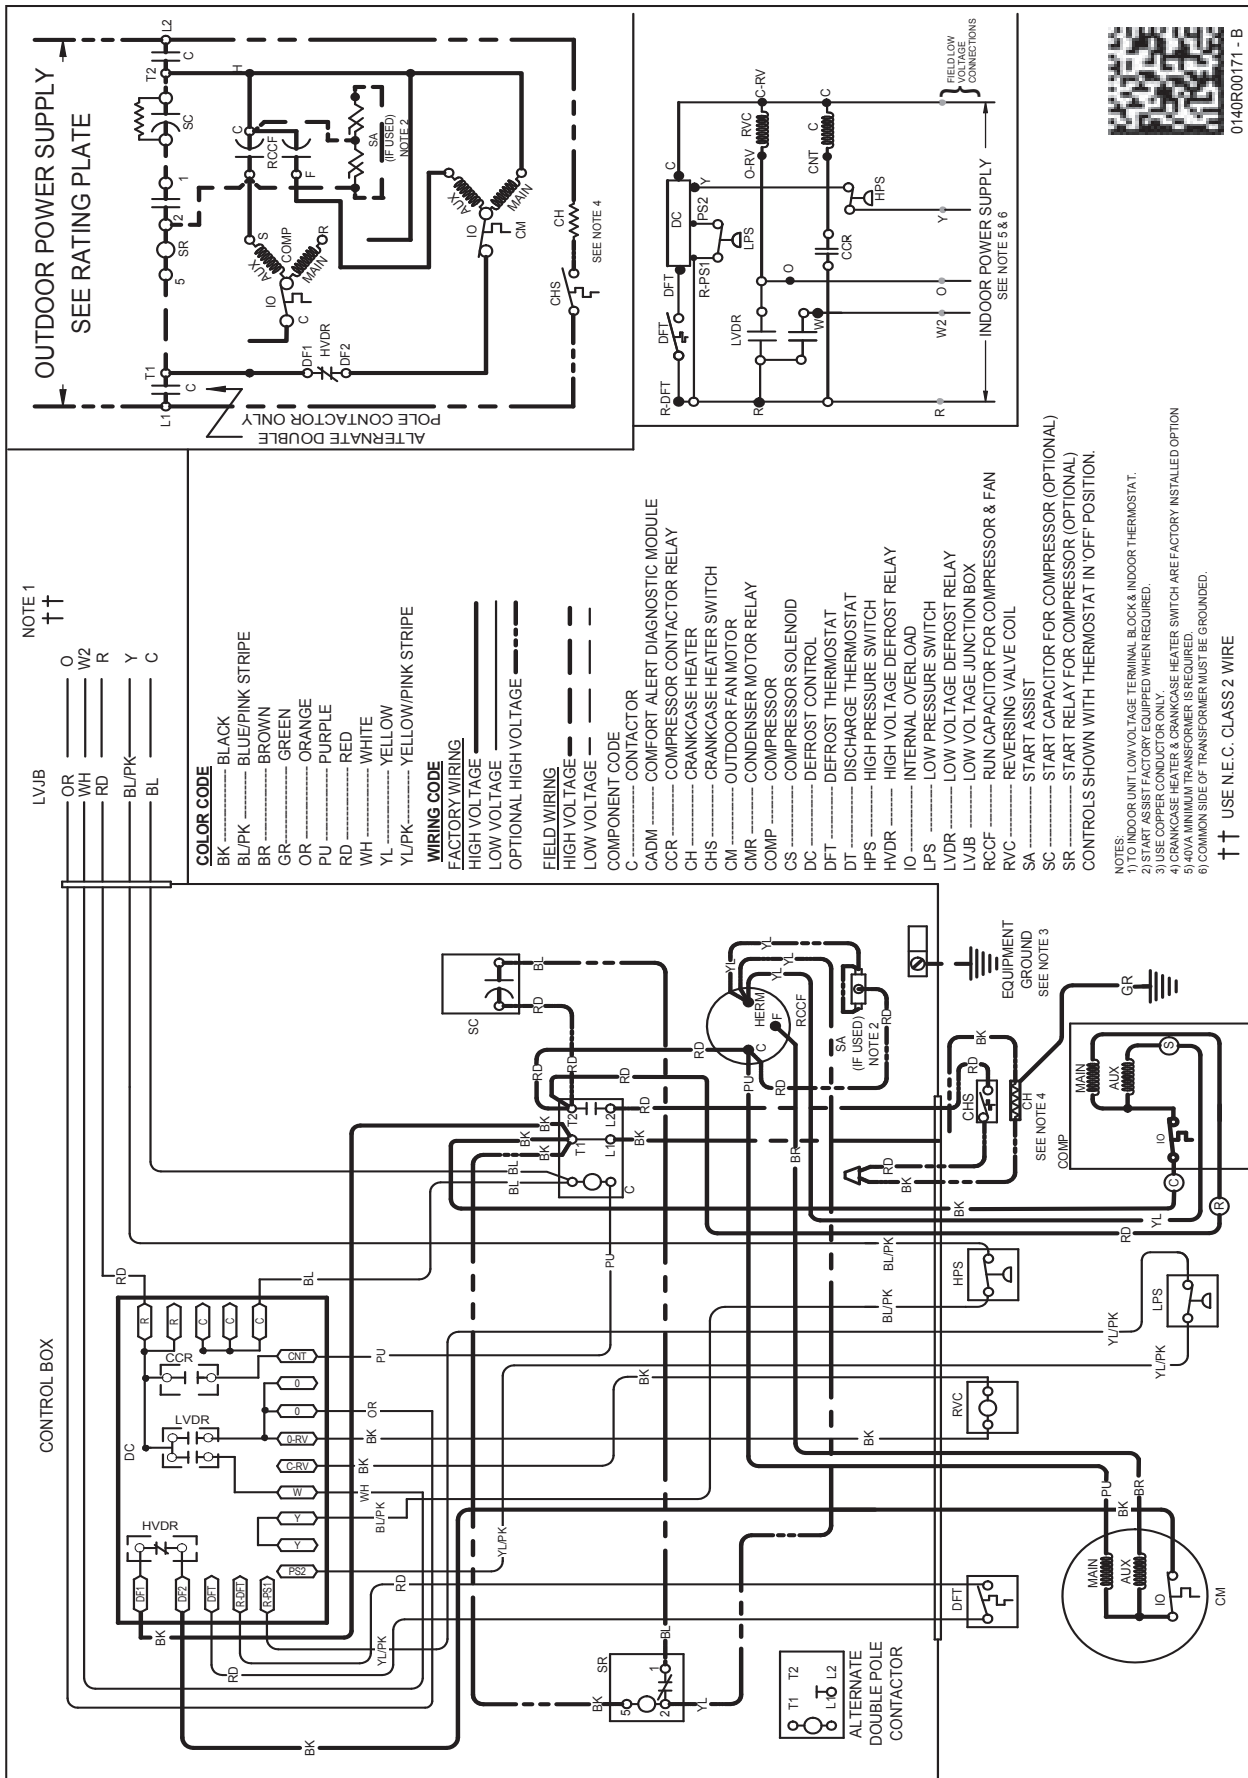

0140R00171-B

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.




**WARNING**



**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

**DIMENSIONS**

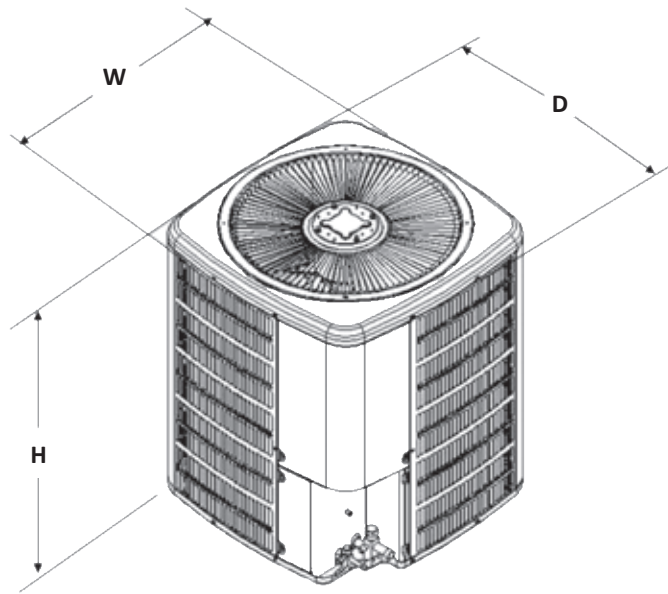

MODEL	DIMENSIONS		
	W"	D"	H"
GSZ140181K*	29	29	34½
GSZ140241K*	29	29	34½
GSZ140301K*	29	29	36¼
GSZ140361K*	29	29	36¼
GSZ140421K*	35½	35½	39¼
GSZ140481K*	29	29	36¼
GSZ140491K*	35½	35½	34¼
GSZ140601K*	35½	35½	34¼

**ACCESSORIES**

MODEL #	DESCRIPTION	GSZ14 018	GSZ14 024	GSZ14 030	GSZ14 036	GSZ14 042	GSZ14 048/049	GSZ14 060
0130R00000S	Low-pressure Switch Kit	X	X	X	X	X	X	X
ABK-20	Anchor Bracket Kit <sup>0</sup>	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
OT18-60A <sup>2</sup>	Outdoor Thermostat	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X	X
TX2N4 <sup>3</sup>	TXV Kit	X						
TX2N4A <sup>3</sup>	TXV Kit	X	X					
TX3N4 <sup>3</sup>	TXV Kit			X	X			
TX5N4 <sup>3</sup>	TXV Kit					X	X	X

<sup>0</sup> Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

<sup>3</sup> Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.