



CM470711
400 series fully automatic espresso machine
stainless steel-backed full glass door
Width 60 cm
Controls on top

Handleless door / automatic door opening
Fixed inlet and outlet water connection
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Color Variants

CM470711
stainless steel-backed full glass door
Width 60 cm

Included accessories

1 x assembly screws.
 1 x scoop.
 1 x test strip.
 1 x milk container (insulated).
 1 x connection hose for milk frother.
 1 x milk pipe.

Type of beverage

Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffè Latte / 2 x Caffè Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Operation

One touch control panel and an interactive visual display.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Personalisation function, option to save 8 individualised beverages.
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 Coffee: 3 grades.
 Hot water: 10 grades.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 2 3/4" to 5 7/8".
 Easy access to water tank, milk and coffee bean container behind the door.

Features

Non-wearing grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 275 psi (19 bar) pressure.
 Double grinding and brewing cycles for extra intensity for single beverage order.
 For double beverage order, two grinding and brewing cycles.
 Beverage dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 17 oz. (0.5 litres).
 Integrated lightning with LEDs.
 Removable bean container with aroma protecting lid for 17.6 oz. (500 g) allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.

Product Features

Frothing nozzle
 No
Hot water spout
 No
Adjustable programs
 Brewing temperature, Coffee powder quantity per cup, Grinding factor, Water hardness, Water quantity per serving
Standby function
 Yes
Pump pressure (bar)
 19
Simultaneous preparation of 2 cups
 Yes
Included accessories
 1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories

Consumption and connection features

Product group
 Built-in coffee machine
Brand
 Gaggeneau
Product name / series name
 SKU
 CM470711
UPC code
 825225956532
Variant color
 Stainless steel
Typology
 Fully automatic
Watts (W)
 1600
Current (A)
 10
Volts (V)
 120
Frequency (Hz)
 60
Approval certificates
 UL
Power Cord Length
 39"
Plug type
 Gardy plug w/ earthing
Recommended height for installation (in)
 17 11/16"
Overall appliance dimensions (HxWxD) (in)
 17 15/16" x 23 1/4" x 21 1/7"
Dimensions of the packed product (in)
Net weight (lbs)
 59
Gross weight (lbs)
 65
Capacity water container (l)
 2.4
Dimensions of the pallet (in)
 2019-01-02
 Page 1

Removable 81 oz. (2.4 litre) water tank.
 Electronic water filter exchange indicator.
 Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.
 Aqua stop with guarantee.

Cleaning


Fully automatic rinse program when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling program.
 Emptying program to prepare the appliance for holiday or transportation.
 Removable brewing unit.
 Coffee residue container and drip tray dishwasher-safe.
 Beverage dispenser dishwasher-safe.

Planning notes



Ideal installation height 3.1 ft - 4.8 ft. (top edge of bottom niche).
 The front of the appliance extends 1 7/8" from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 13 3/4".
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 25 9/16".
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 3 15/16" (spare part No. 00636455).
 Installation directly above WS461 (5 3/8" tall) high warming drawer in 23 1/4" standard cut-out niche.
 At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 150 mm lower than the appliance outlet (see drawing "drainage connection").
 If the appliance is placed too far from the main siphon, the drain system has to be adjusted on-site (building installation).
 The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.
 The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.
 Special accessories (order as spare parts):
 Part No. 12008246 Water filter
 Part No. 00311820 Descaling tablets
 Part No. 00311823 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid
Rating
 Total rating 1.6 kW.
 Connection cable 39" with plug.
 Only cold water connection.
 Inlet hose 165 cm with 3/4" (26.4 mm) connection, extendable.
 Outlet hose (ø 18 mm) 170 cm (HT-Hose).

CM470711
400 series fully automatic espresso machine
stainless steel-backed full glass door
Width 60 cm
Controls on top
 2019-01-02
 Page 2


Top View



Drainage connection

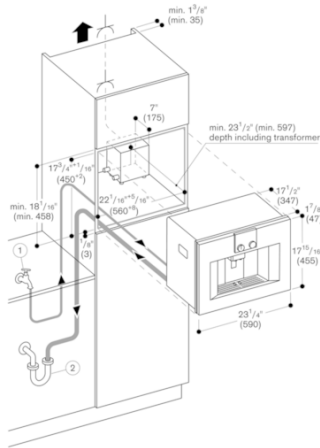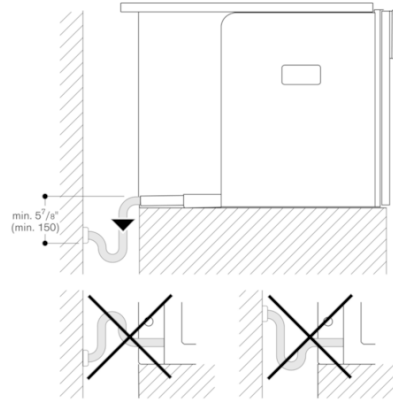

View from rear

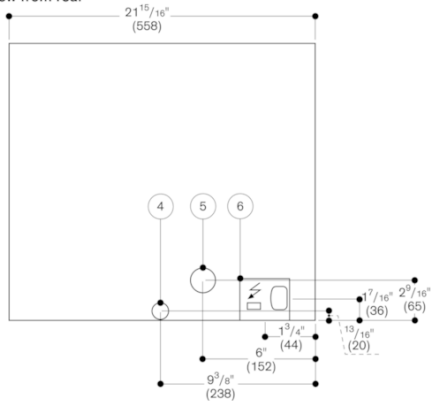

- (4) Water outlet
- (5) Cold-water connection
- (6) Electric terminal box