T24IR900SP 24-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY











FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

| TEMPERATURE RANGES | | |
|-------------------------------|--|--|
| Refrigerator | 36°F (2°C) to 46°F (8°C) | |
| Temperature Controlled Drawer | 32°F (0°C) to 46°F (8°C) | |
| Deli Drawer | Just above 32°F (0°C) | |
| SuperCool | 35.5°F (2°C) for approximately 6 hours | |
| Energy Saving (Economy) Mode | 45°F (7°C) | |

| Panel Ready | Yes |
|---|---|
| | Yes |
| Reversible Door Swing SoftClose® Drawers | |
| Carbon Air Filter | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 4 |
| Adjustable Shelves | 3 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature and Humidity Controlled Drawer | 1 |
| General Use Drawer | 1 |
| Door Bins | 2 |
| Gallon Door Bins | 1 |
| Delicate Produce Bins | 2 Small |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, |
| Special Modes | Vacation Vacation |
| • | |
| CAPACITY | |
| CAPACITY Total Capacity (cu. ft.) | Vacation |
| • | Vacation |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System | Vacation 12.8 cu. ft. |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE | Vacation 12.8 cu. ft. Yes |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool | Vacation 12.8 cu. ft. Yes Yes |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool | Vacation 12.8 cu. ft. Yes Yes |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS | Vacation 12.8 cu. ft. Yes Yes Yes |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4" × 23 3/4" × 2 |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4"* x 23 3/4" x 2 84" x 24" x 25" |
| CAPACITY Total Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System Freeflow® Cold Air System SuperCool TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) | Vacation 12.8 cu. ft. Yes Yes Yes 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4"* x 23 3/4" x 2 84" x 24" x 25" |

^{*}Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 11 / 18

T241R900SP

24-INCH BUILT-IN FRESH FOOD COLUMN







| WARRANTY | |
|---|------------------|
| Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect | 2 Year |
| Limited Warranty for Sealed Refrigeration System**; Parts and Labor | 3rd to 6th Year |
| Limited Warranty for Sealed Refrigeration System**; Parts Only | 7th to 12th Year |
| Limited Warranty for Stainless Steel Rust-Through | Lifetime |

 $^{{\}tt **Sealed}\ {\tt refrigeration}\ {\tt system}\ {\tt includes}\ {\tt compressor},\ {\tt evaporator},\ {\tt condenser},\ {\tt dryer}\ {\tt /}\ {\tt strainer}\ {\tt and}\ {\tt connection}\ {\tt tubing}$


CUTOUT DIMENSIONS

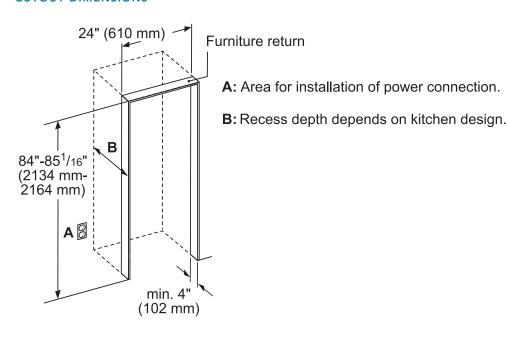

TOP VIEW CLEARANCE



** Door handle must be added to this dimension



Page 2 of 3 11 / 18


T241R900SP

24-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

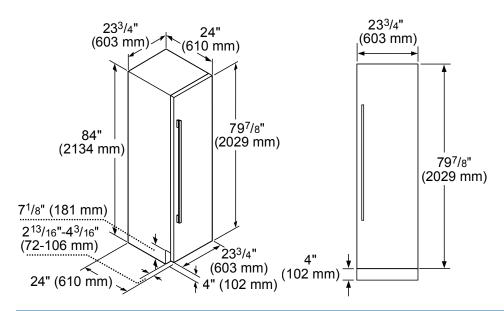

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS



TFL24IR800 24-Inch Flat Stainless Steel Door Panel

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

STORAGE



SPRODBIN10 Small Produce Bin



LPRODBIN10 Large Produce Bin



24PRODRAIL 24-Inch Produce Railing



24HFGALBIN 24-Inch Half Gallon Bin

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20

36-Inch Professional Series Handle PR30HNDL20

30-Inch Professional Series Handle

MS36HNDL20

36-Inch Masterpiece® Series Handle MS30HNDL20

30-Inch Masterpiece® Series Handle

AVAILABLE WHILE SUPPLIES LAST:

MS36HNDL10

36-Inch Masterpiece® Series Classic Handle MS30HNDL10

30-Inch Masterpiece® Series Classic Handle

HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\ THERMADOR.COM\mid CANADA\ THERMADOR.CA\mid @2018\ BSH\ HOME\ APPLIANCES\ CORPORATION.\ ALL\ RIGHTS\ RESERVED.$

Page 3 of 3 11 / 18