



# RESIN VESSEL SINK INSTALLATION

## BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing. Signature Hardware accepts no liability for any damage to the floor, walls, plumbing, vanity cabinet, sink, counter top, or personal injury during installation.

Observe all local plumbing and building codes.

Unpack and inspect the sink for damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

---

## GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For the following instructions, it is assumed that the vanity and countertop are already in place.

## TOOLS AND MATERIALS:



Silicone Sealant  
(100% Neutral  
Cure)




Damp Cloth




## RESIN VESSEL SINK INSTALLATION

### Installation


1. Carefully place your vessel sink upside down on the counter top. Apply a generous amount of silicone sealant to the base of the sink where it will rest on the counter.

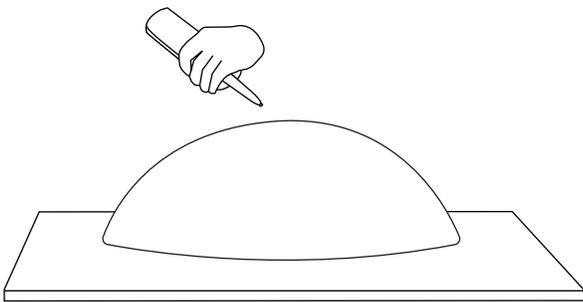


2. Turn the sink right-side-up and position over the drain hole. Set the sink in place, and press firmly to secure.

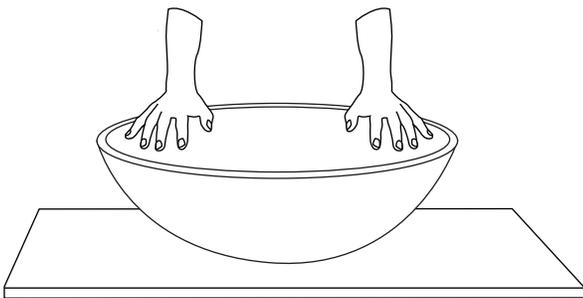

3. If desired, apply a continuous bead of silicone sealant around the perimeter of the sink base for additional stability.

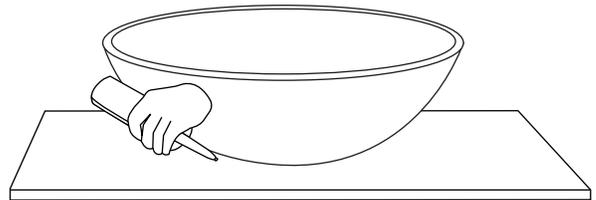

4. Remove any excess sealant with a damp cloth to complete installation.

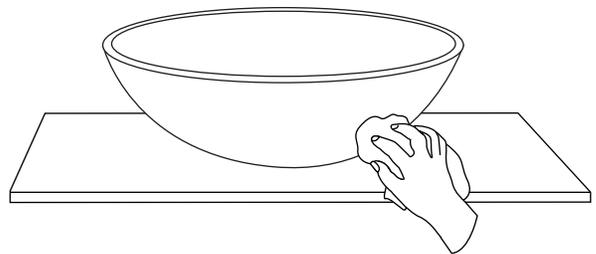



## RESIN VESSEL SINK INSTALLATION

5. Proceed to the installation of the sink drain. Refer to the drain's installation instructions for guidance.



6. Allow the sealant to fully dry for 24 hours.



### Cleaning and Maintenance

Resin has a nonporous surface that makes it resistant to stains, scratches and discoloration. To maintain the condition of your new resin sink, simply wipe the surface with a dry, soft cloth after each use. Most dirt and dust will wash off with clean, warm water. For a more thorough cleaning, be sure to use a mild cleaner such as a gentle dish soap. Avoid any products that contain abrasives, acids, or ammonia.

#### SCRATCH REMOVAL

1. Use warm water to remove dirt and dust from the surface.
2. Use #800 sandpaper (coarse-grit) and rub in small, circular motions until the scratch is gone.
3. Follow with #1200 sandpaper (fine-grit) and rub over the surface of the scratch to smooth and blend.
4. Dry with a towel.
5. Polish the surface with a cloth and a polishing compound. Any automobile polishing compound will suffice.