

Specialty Products

Copper Stub Outs Specification Sheet



P-8001, P-8114, and P-8007 shown above.

Connection Type	Without Flange Part Number	With Flange Part Number	Dim. A	Dim. B
1/2" Sweat, 6" Straight	P-8001	N/A	6"	N/A
1/2" Crimp PEX, 6" Straight ASTM F1807	P-8002	N/A	6"	N.A
1/2" Sweat, 8" Elbow	P-8003	P-8103	8"	3.75"
1/2" CPVC, 8" Elbow ASTM D2846	P-8004	N/A	8"	3.50"
3/8" Crimp PEX x 1/2" CTS, 8" Elbow ASTM F1807	P-8006	N/A	8"	3.75"
1/2" Expansion/Uponor PEX, 8" Elbow ASTM F1960	P-8007	P-8107	8"	3.75"
1/2" Crimp PEX, 8" Elbow ASTM F1807	P-8014	P-8114	8"	3.75"

DESIGN FEATURES

- For use in potable water distribution systems
- 100% Leak tested spin closed end
- Low Lead
- 1 year limited warranty
- Crimp brass fittings: No solder connections to eliminate corrosion
- Easy stud/hyco/Boss Bar strap connection with flange
- Full flow with no restrictions

MATERIAL SPECIFICATIONS

- Copper: Type L thick wall 1/2" CTS
- Connection: Low Lead Brass or Preformed copper
- Flange: Copper plated cold rolled steel
- Chloramine resistant elastomers and sealing components.

OPERATING SPECIFICATIONS

- Working Temperature: 40°-160°F
- Max working pressure 125 PSI

CAUTION

- Do NOT expose to excessive amounts of flux, PVC/CPVC primers or glues, household cleaners, external heat sources, or corrosive materials.

COMPLIANCES/LISTINGS

- Low lead compliant.




3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com Website

www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

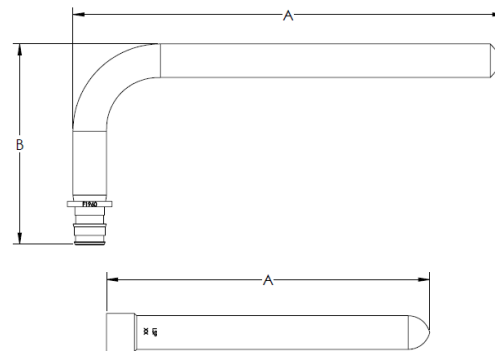

INSTRUCTIONS

- Connect tubing/pipe to stub out following tubing/piping manufacturer's specification.
- Fasten stub out to stud:
 - For flange stub outs fasten directly to stud or use LSP Boss Bar P-1090 or P-1093 products.
 - Non-flange stub outs use LSP Acousto Kit P-6721 or P-6730 with Galvanized PipeSecure brackets for noise absorbing assembly or use copper plated Pipe secure brackets P-1059, P-1060(-26), P-1061, or P-1062(-26).
- Pressurize and check for leaks before cutting closed end and attaching supply stop.
- Do not re-use.
- Do not clean with harsh household chemicals. Wipe clean with water and a clean cloth.

Product Submittal	
Job Name:	
Date:	
Part Number	Quantity
Architect:	
Contractor:	