

ADJUSTABLE ON-GRADE CLEANOUT

834 series

Finish Line™

SPECIFICATION

Sioux Chief 834 series Finish Line adjustable on-grade cleanout shall be used where necessary in drainage systems. Cleanout shall allow adjustment of 1.25" before the concrete pour, and 1.25" after the concrete pour. Scoriated cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a 3.5" slotted, polypropylene or brass cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M-2002

MATERIALS

ring/cover: nickel-bronze, ductile iron
head adapter: ductile iron
coring sleeve: ductile iron
coring plug: high-impact polymer
cleanout plug: polypropylene, brass
base adapter: ductile iron

COVER LOAD RATING

nickel-bronze: 4,000 lbs. (medium duty)
stainless steel: 4,000 lbs. (medium duty)
ductile iron: 6,000 lbs. (heavy duty)


DIMENSIONS

A: connection size	3", 4"
B: ring/cover diameter	
round	6½"
square	6¾"
C: base adapter height	
no-hub	4½"
push-joint	4⅞"
D: pre-pour adjustable height	
no-hub	5⅜" – 6⅝"
push-joint	5¾" – 7"
E: post-pour adjustable height	0" – 1¼"
F: cleanout plug	3½" MIP thread

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____



834-4DNR

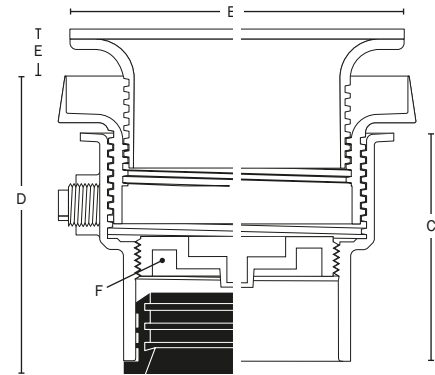

Models 834-3DiR, 834-3DNQ, 834-3DNR, 834-4DiR, 834-4DNQ, 834-4DNR are UPC listed

Create Item Number

834-ABC

e.g. 834-64DSRVP = Finish Line cleanout with 4" push-joint connection (Sch. 40 gasket) and round stainless steel cover with vandal-resistant screws

<u>A</u>	CONNECTION	<u>B</u>	RING & COVER
<input type="checkbox"/> 3D	3" No-Hub	<input type="checkbox"/> iR	round ductile iron
<input type="checkbox"/> 63D	3" Push-Joint	<input type="checkbox"/> NR	round nickel-bronze
<input type="checkbox"/> 4D	4" No-Hub	<input type="checkbox"/> NQ	square nickel-bronze
<input type="checkbox"/> 64D	4" Push-Joint ¹	<input type="checkbox"/> SR	round stainless steel
		<input type="checkbox"/> SQ	square stainless steel

¹ Gasket designed for cast iron pipe - see options under C for Sch. 40 gasket

<u>C</u>	OPTIONS
<input type="checkbox"/> V	Vandal-resistant cover screws
<input type="checkbox"/> S	Stamping (specify letters) ²
<input type="checkbox"/> Z	Complies with Buy American Act ³
<input type="checkbox"/> B	Brass plug in place of polypro
<input type="checkbox"/> P	Sch. 40 push-joint gasket ⁴
<input type="checkbox"/> C	Carpet marker

² Not available for ductile iron covers
³ Only available on cleanouts with round nickel-bronze covers
⁴ Only available on cleanouts with 4" push-joint connections

ACCESSORIES

- 832-S4 leveling shim kit 832-W locating bristles kit
- 832-EX4 ductile iron extension nipple