




Glas-Wrap™ Outerwrap

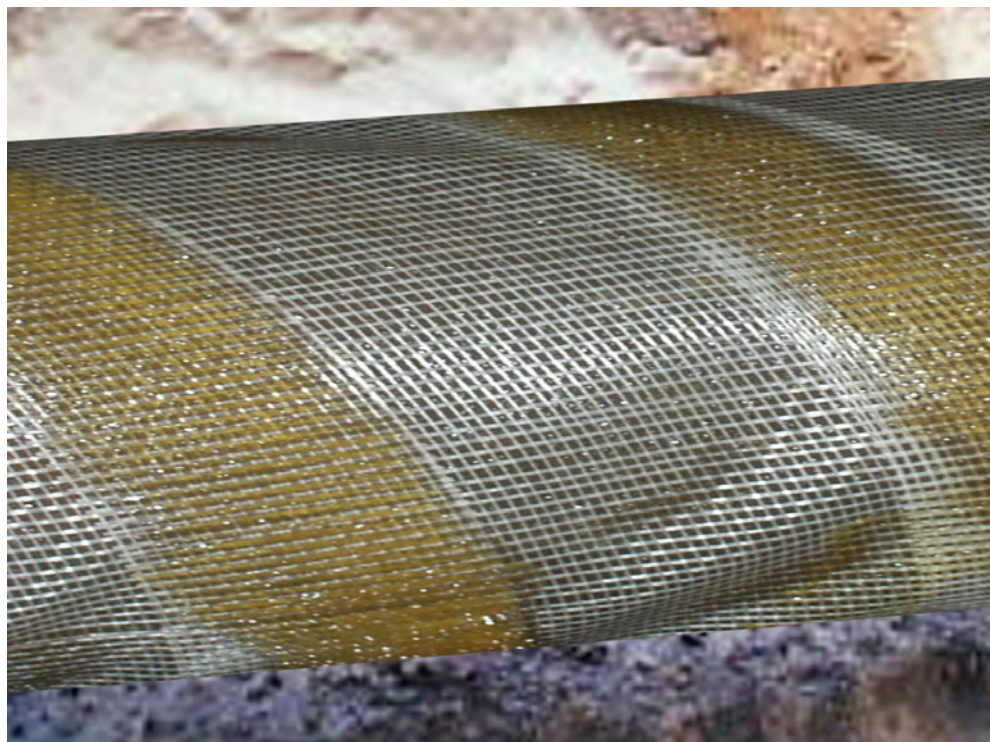

Description:

Glas-Wrap™ outerwrap is a white, resin-coated, woven fiberglass fabric.

End Use:

Used as an overwrap for Trenton Wax-Tape® #1 anticorrosion wrap for additional protection against backfill and soil stress.

Application Procedures:

Wearing gloves, apply Glas-Wrap outerwrap over the Wax-Tape #1 wrap with a 1" overlap, rubbing firmly onto the Wax-Tape wrap.

Specifications:

Tensile strength..... (per one inch width) 85 lb min.

Thread count per inch:

Wrap threads.... 20

Fill threads..... 10

Thickness..... .005 in.

Color..... White

Packaging:

4" x 150' rolls (18 per case)

6" x 150' rolls (12 per case)

12" x 150' rolls (6 per case)

100 sq. yds. per case, 13 lbs per case

Quantity Requirements:

Pipe Size	Tape Width	Sq. yds./100 ft. (1" overlap)
2"	4"	10
4"	4"	20
6"	4"	29
8"	4"	37
10"	6"	42
12"	6"	49
14"	6"	54
16"	6"	62
18"	6"	69
20"	6"	77
22"	6"	85
24"	6"	92



Corporate Office:

7700 Jackson Road
Ann Arbor, MI 48103 USA
(734) 424-3600
Fax: (734) 426-5882
trenton@trentoncorp.com

Houston Office:

1880 S. Dairy Ashford Rd.
Suite #697
Houston, Texas 77077 USA
(281) 556-1000
Fax: (281) 556-1122
tweber@trentoncorp.com

European Office:

8 rue d'Athènes
75009 PARIS
France
+33 (0) 1 42 99 95 78
Fax: +33 (0) 1 77 65 62 99
europe@trentoncorp.com

www.trentoncorp.com