

## LOW LEAD COMPLIANT WATER HAMMER ARRESTORS

### Applications:

The FNW water hammer arrestors are engineered devices that provide maintenance-free continuous protection systems against water hammer. Water hammer is a hydraulic shock wave generated within a water distribution system due to a sudden stop in water flow. If allowed to exist for any length of time, water hammer can cause pipes to rattle, is capable of bursting pipe, and damaging other components within the system. When installed properly, there is an unobstructed shock path to the arrestor that is absorbed by a piston driven and isolated cushion of air.

### Features:

- Lead Free Certified
- Max. Static (Working) Pressure: 150 PSI
- Max. Spike Pressure: 350 PSI
- Temperature: 33°F to 180°F (0.6°C to 82°C)
- End Connection: NPT (X10P), Cx (X11P)
- For Commercial and Residential Systems
- Suitable for Potable Water Applications
- Designed for Vertical or Horizontal Installation (not to be installed in the inverted position)
- Can be installed in systems without need for access panels\*
- \* Always check local plumbing codes to determine if access panels are required.
- \* Sweat version not to be used in conjunction with copper propress system due to brass connection.

### Standards:

- Federal Safe Drinking Water Act, Sec. 1417 (Lead Free)
- ASSE Standard 1010
- IAPMO Listed (cUPC)

### Warranty:

- Guaranteed for the life of the system they are installed in.



Low Lead Compliant: Referring to laws defining "Lead Free" as wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content  $\leq 0.25\%$  per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 as well as other state regulations.



### Sizing / PDI Fixture Units\*

FNW Size	PDI Size Code		PDI Fixture Units
	X10P	X11P	
1/2"	A	A	1 - 11
3/4"	B	B	12 - 32
1"	C	C	33 - 60
1-1/4"	D	D	61 - 113
1-1/2"	E		114 - 154
2"	F		155 - 330

\* As outlined in The Plumbing and Drainage Institute standard PDI-WH 201. See the FNW water hammer arrestor IOM for more details.

### Figure Number Matrix

FNW End Size		
END TYPE	SIZE CODE	
X10P = MALE NPT (1/2" to 2")	1/2 = 500	1-1/4 = 1250
X11P = COPPER SWEAT (1/2" to 1-1/4")	3/4 = 750	1-1/2 = 1500
	1 = 1000	2 = 2000

# LOW LEAD COMPLIANT WATER HAMMER ARRESTORS

Fig. X10P


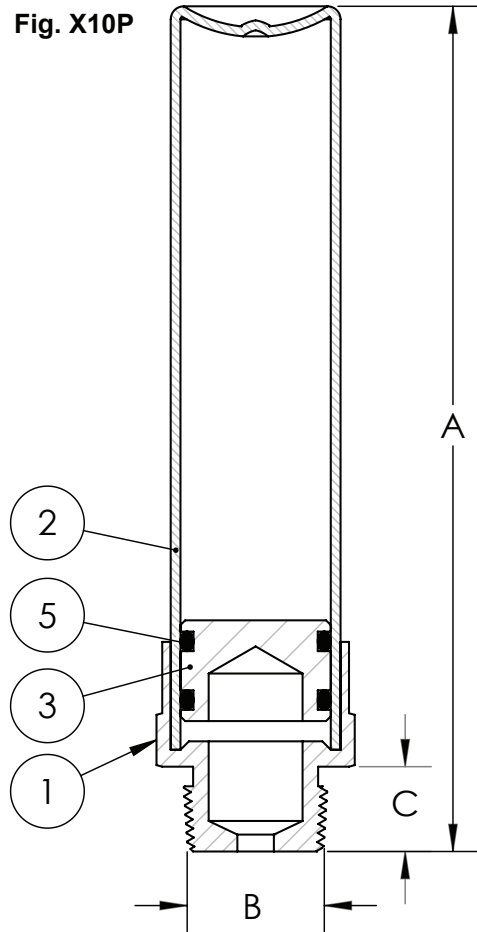


Fig. X11P

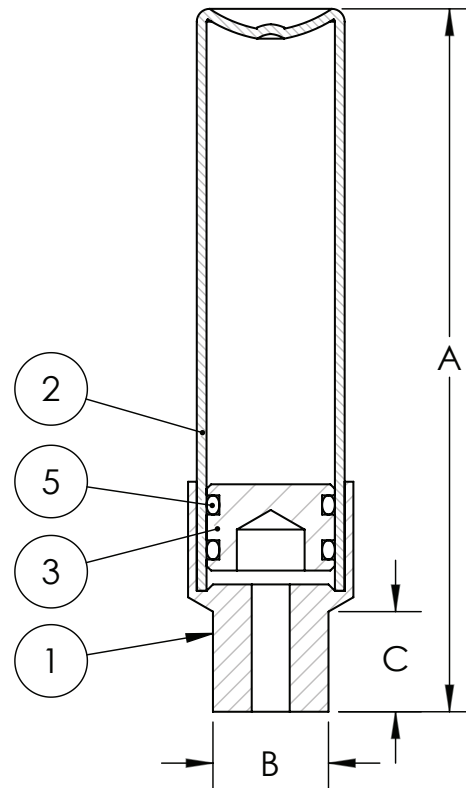

### Standard Materials

Ref. No.	Description	Material	Qty
1	Body	Lead Free Brass, C46400	1
2	Cylinder	Copper C12200	1
3	Piston	PP+30% Fiber	1
5	O-ring	EPDM	2

### Dimensions (inches)

Size	Fig. 10P			Fig. 11P		
	A	B (NPT)	C	A	B	C
1/2	4.75	1/2 - 14	0.63	4.96	0.625	0.72
3/4	5.37	3/4 - 14	0.65	5.57	0.875	0.80
1	6.70	1 - 11 1/2	0.74	6.85	1.125	0.98
1-1/4	8.20	1-1/4 - 11 1/2	0.88	8.30	1.375	1.10
1-1/2	9.40	1-1/2 - 11 1/2	0.94			
2	9.40	2 - 11 1/2	0.94			

DOC: FNWX10P-X11P14 0718 915593

© 2018 - FNW.

The FNW logo is a trademark of Ferguson Enterprises, Inc., PL Sourcing, PO Box 2778, Newport News, VA 23609

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Always verify that you have the most recent product specifications or other documentation prior to the installation of these products.