MOEN®

Specifications

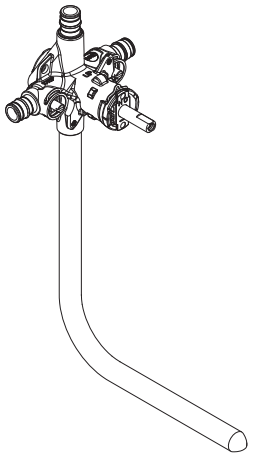

POSI-TEMP® VALVE
Pressure-Balancing Valve

DESCRIPTION
- Brass Construction
- Pressure balancing valve design with 1/2" PEX, CPEX, or CC
- Tub outlet - 8" x 7" x 1/2" copper tube

OPERATION
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3˚

CARTRIDGE
- 1222 cartridge design
- Flush Plug Available with "FP" Prefix models
- Accommodates back to back installations

STANDARDS
- Third party certified to meet ASME A112.18.1/CSA B125.1, ASSE 1016, and all applicable requirements referenced therein

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Models:

2385PF / FP62385PF (bulk)	4 Port Posi CPEX w/ CC drop with stops
2360PF / FP62360PF (bulk)	4 Port Posi PEX w/ CC drop with stops
FP62365PF (bulk)	4 Port Posi CPEX w/ CC drop blk pk
FP62380PF (bulk)	4 Port Posi PEX w/ CC drop blk pk
62380PF	4-PORT Posi-Temp PEX w/ CC Drop
62360PF	4-PORT Posi-Temp PEX w/ CC Drop with Stops
62365PF	4-Port Posi-Temp CPEX w/ CC Drop
62385PF	4-Port Posi-Temp CPEX w/ CC Drop with Stops
62320PF	4-Port Posi-Temp CC w/ CC Drop
62370PF	4-Port Posi-Temp CC w/ CC Drop with Stops

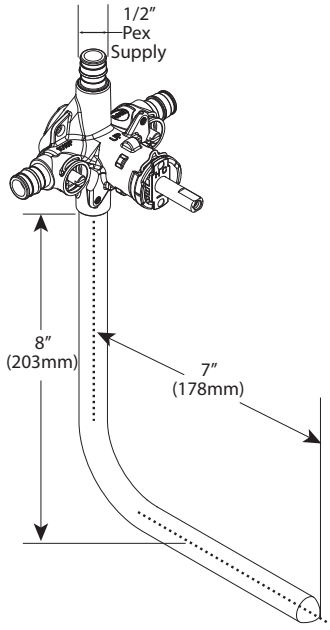

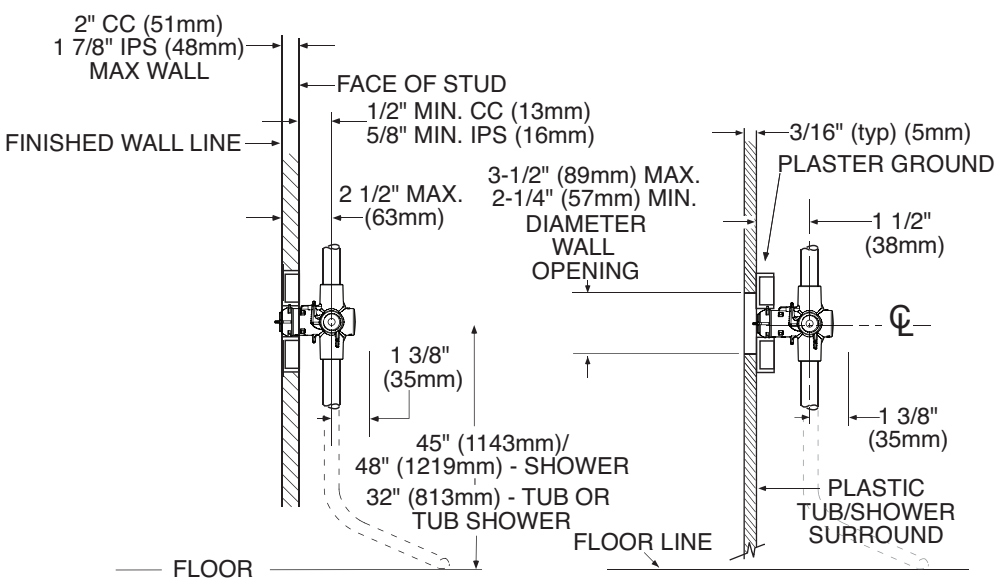

CRITICAL DIMENSIONS
(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com

Rev. 9/20

11/07/2020 SPC 19536 300004460?
Released