



BLUE MONSTER® Thread Sealant

Industrial Grade PTFE Pipe Thread Sealant



**Formulated for
extra lubrication on metal pipe threads.**

BLUE MONSTER Industrial Grade PTFE enriched Pipe Thread Compound is a slow-drying, soft-setting, non-hardening pipe thread compound. *Blue Monster* has a high bulk density, which means there are more solids in the formulation. This allows you to work the product into the valley of the threads giving you greater sealing capabilities to fill any voids that occur under different tolerances of pipe and fittings. *Blue Monster* with PTFE is recommended for on-site or assembly line work. It is lead-free, non-toxic and will not harden or separate in the can.

When applied properly, *Blue Monster* allows the system to be pressurized immediately after assembly. It does not require any set or cure time. This compound is made with the highest quality materials. All information provided is based on our laboratory testing, independent laboratory test results and actual field experience.

Blue Monster PTFE pipe thread sealant is formulated with PTFE resin, a polymer consisting of recurring tetrafluoroethylene monomers whose formula is $(CF_2-CF_2)_n$. It is inert and compatible with a very wide range of materials.

Heavy-Duty Industrial Grade with PTFE

Seals threads on all Metals, PVC, CPVC, ABS and Nylon Plastic Pipe Systems

- Heavy-Duty Industrial Grade
- Specially formulated for production line use
- Adheres to oily threads
- Non-hardening
- Non-toxic
- Slow-Drying
- Easy-cleanup
- Soft-Set
- Grit-Free
- Low-Odor

Blue Monster can be used on pipes carrying the following:

- Acids, Dilute
- Air, Compressed
- Aliphatic Solvents
- Alkalis, Dilute
- Ammonia
- Brine
- Butane
- Carbon Dioxide
- Castor Oils
- Chlorinated Water
- Coal Tar Naptha
- Corrosives
- Cutting Oils
- Diesel Fuel Oil
- Fatty Acids
- Freons (All)
- Gasohol
- Gasoline
- Glycol
- Heating Oils
- Helium, Gaseous
- Hydraulic Oils
- Hydrogen
- Inert Gases
- Jet Fuel
- Kerosene
- Lacquer
- Liquefied Petroleum Gases
- Mineral Oils
- Naptha
- Natural Gas
- Nitrogen Gas
- Petroleum Solvents
- Propane
- Refrigeration Gases
- Soap, Liquid
- Steam Lines
- Sugar, Liquid
- Vegetable Oils
- Water, Potable
- Xylol

Not recommended for use on oxygen systems. Use Clean-Fit 3-wrap Oxygen PTFE Tape

Cat #	Size	Case Pack	Weight
76001	1/4 pint / 4 fl. oz. / 118 ml	24	15 lbs
76003	1/2 pint / 8 fl. oz. / 237 ml	24	23 lbs
76005	1 pint / 16 fl. oz. / 473 ml	12	22 lbs
76017	1 quart / 32 fl. oz. / .95 liter	12	42 lbs.

Meets Mil. Spec. TT-S-1732

Brushable from -50°F (-45°C) to +400°F (204°C)

Pressure ratings: Gases up to 3,000 PSI (210.9 kg/sq cm)

Liquids up to 10,000 PSI (703 kg/sq cm)



Requirements certified to ANSI LC 7-2009 and CAN ULc S642-07 metal threads only through 2" in diameter, +125°F TO -40°F, 125 PSIG for use with natural and LP (vapor state) gases only.



The Mill-Rose Company • Clean-Fit Products
7310 Corporate Blvd., Mentor, OH 44060


To order call toll-free: (800) 321-3598 or Fax (440) 255-1072

Visit our web site at www.CleanFit.com • E-mail: info@CleanFit.com

For Material Safety Data Sheets, contact Mill-Rose or download directly from the Mill-Rose Clean-Fit website.



BLUE MONSTER® Thread Sealant

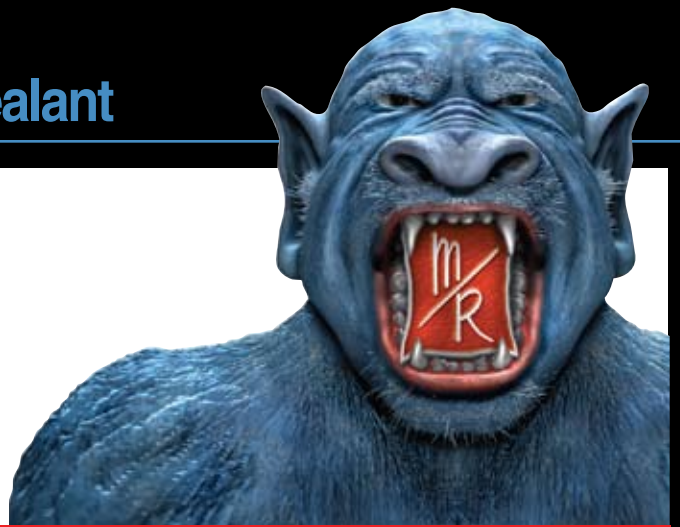

Industrial Grade Pipe Thread Sealant

Heavy-Duty Industrial Grade



Seals threads on all Metals, PVC, CPVC, ABS and Nylon Plastic Pipe Systems

- Heavy-Duty Industrial Grade
- Non-hardening
- Soft-Set
- Specially formulated for production line use
- Non-toxic
- Grit-Free
- Adheres to oily threads
- Slow-Drying
- Low-Odor
- Easy-cleanup

BLUE MONSTER Industrial Grade Pipe Thread Compound is a slow-drying, soft-setting, non-hardening pipe thread compound. Specially formulated with superb "sticking" characteristics, *Blue Monster* applies evenly and quickly to threads. *Blue Monster* is recommended for on-site or assembly line work. It is lead-free, non-toxic and will not harden or separate in the can.

When applied properly, *Blue Monster* allows the system to be pressurized immediately after assembly. It does not require any set or cure time.

This compound is made with the highest quality materials. All information provided is based on our laboratory testing, independent laboratory test results and actual field experience.

Blue Monster can be used on pipes carrying the following:

- Acids, Dilute
- Air, Compressed
- Alkalis, Dilute
- Ammonia
- Aliphatic Solvents
- Brine
- Butane
- Carbon Dioxide
- Castor Oils
- Chlorinated Water
- Coal Tar Naptha
- Cutting Oils
- Diesel Fuel Oil
- Freons (All)
- Gasohol
- Gasoline
- Glycol
- Heating Oils
- Helium, Gaseous
- Hydraulic Oils
- Hydrogen
- Inert Gases
- Jet Fuel
- Kerosene
- Lacquer
- Liquified Petroleum Gases
- Mineral Oils
- Natural Gas
- Nitrogen Gas
- Petroleum Solvents
- Propane
- Refrigerated Gases
- Soap, Liquid
- Steam Lines
- Sugar, Liquid
- Vegetable Oils
- Water, Potable

Not recommended for use on oxygen systems. Use Clean-Fit 3-wrap Oxygen PTFE Tape

Cat #	Size	Case Pack	Weight
76009	1/4 pint / 4 fl. oz. / 118 ml	24	15 lbs
76011	1/2 pint / 8 fl. oz. / 237 ml	24	23 lbs
76015	1 pint / 16 fl. oz. / 473 ml	12	22 lbs
76019	1 quart / 32 fl. oz. / .95 liter	12	42 lbs.

Meets Mil. Spec. TT-S-1732

Brushable from -50°F (-45°C) to +400°F (204°C)

Pressure ratings: Gases up to 3,000 PSI (210.9 kg/sq cm)

Liquids up to 10,000 PSI (703 kg/sq cm)



pw-G/dww/sw



For Material Safety Data Sheets, contact Mill-Rose or download directly from the Mill-Rose Clean-Fit website.

The Mill-Rose Company • Clean-Fit Products

7310 Corporate Blvd., Mentor, OH 44060

To order call toll-free: (800) 321-3598 or Fax (440) 255-1072

Visit our web site at www.CleanFit.com • E-mail: info@CleanFit.com