



FLANGE-GASKET™ 1902


FG-1902

Flange Gasket Sealer

FLANGE-GASKET is an extruded, pressure sensitive, 40-year cycle, gasket sealant designed to seal 4 bolt flange systems. FLANGE-GASKET provides an instant water resistant seal for low, medium and high pressure duct systems with flange type connectors in non-weather exposed areas. The butyl, EPDM and proprietary copolymer blend stays flexible and retains its seal.

TECHNICAL DATA

Appearance	Gray extruded sealant.
Backing	50# Silicone release paper
Adhesive/Sealant	Butyl, EPDM, proprietary copolymer blend.
Peel Strength	120 oz/LI, 500 grams pressure applied @ 77°F
Tensile Strength	20 to 30 psi
Flexibility	Excellent
Bonding Time	Immediate
Time to test	Immediate
Service Temperature	-65°F to 200°F
Water Resistance	Excellent
Mildew Resistance	Mold and mildew resistant
VOC	0 g/l
Pressure Classes	SMACNA 1/2, 1, 2, 3, 4, 6, and 10 inches w.g.
Seal Classes	SMACNA A, B, C
Packaging	20 rolls x 25 ft. x 3/16" x 5/8" inches. 500 ft. per carton
Specification Compliance	Military: MIL-C-18969B, Type II, Class B; Federal: TT-C-1796A, Type II, Class B; USDA

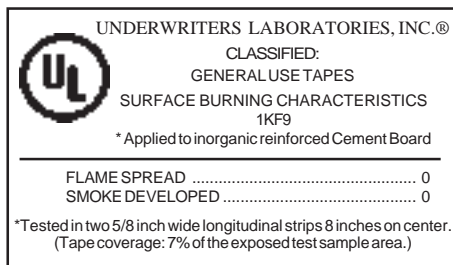

City of Los Angeles Approval RR #7736

FLANGE-GASKET 1902 PART NUMBER

1 Case w/ (20) 3/16" x 5/8" x 25' Rolls 304271

APPLICATION

Temperature	40°F to 120°F
Method	Cut desired length and apply to flange face or lap joint. Peel off release liner. DO NOT STRETCH THIS PRODUCT. Make up flange or lap joint according to instructions.
Preparation	Surface must be clean and dry, oil and grease free.
Clean Up	UNN-GRIP™ 798-ES or Solvent (Use safe handling practices.)

STORAGE

Temperature	30°F to 110°F
Shelf Life	40 Years
Flammability	Non-flammable

Contains no Asbestos, CFC or PCB

PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Do not apply this product in weather exposed areas, where temperatures will exceed 200° F. Do not stretch this product during application. Keep out of the reach of children. Review MSDS for safety information prior to use. **DONOT** use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.

For additional information contact:



Carlisle Coatings & Waterproofing
Incorporated
900 Hensley Lane
Wylie, Texas 75098

Phone: (800) 527-7092 FAX: (972) 442-0076
WWW.HARDCAST.COM