

FAUCET DESCRIPTION

- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Hydrolock™ quick connect installation
- Metal construction with 4 finishes
- Includes 59" hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to CSA B125 and ASME A112.18.1M and all applicable requirements therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

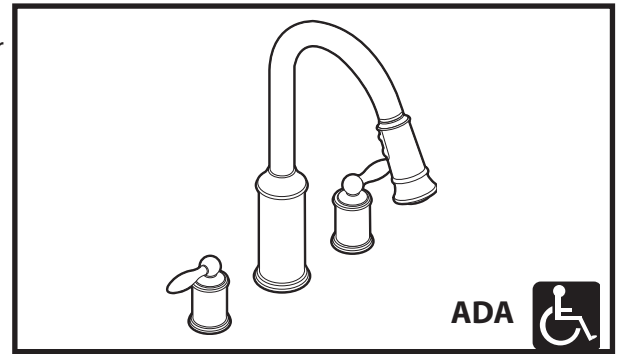

Aberdeen™ Two Handle High Arc Pull Down Kitchen Faucet

Models: 7592C, 7592CP,
7592CPR, 7592SL

NOTE: DESIGNED TO INSTALL
THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.

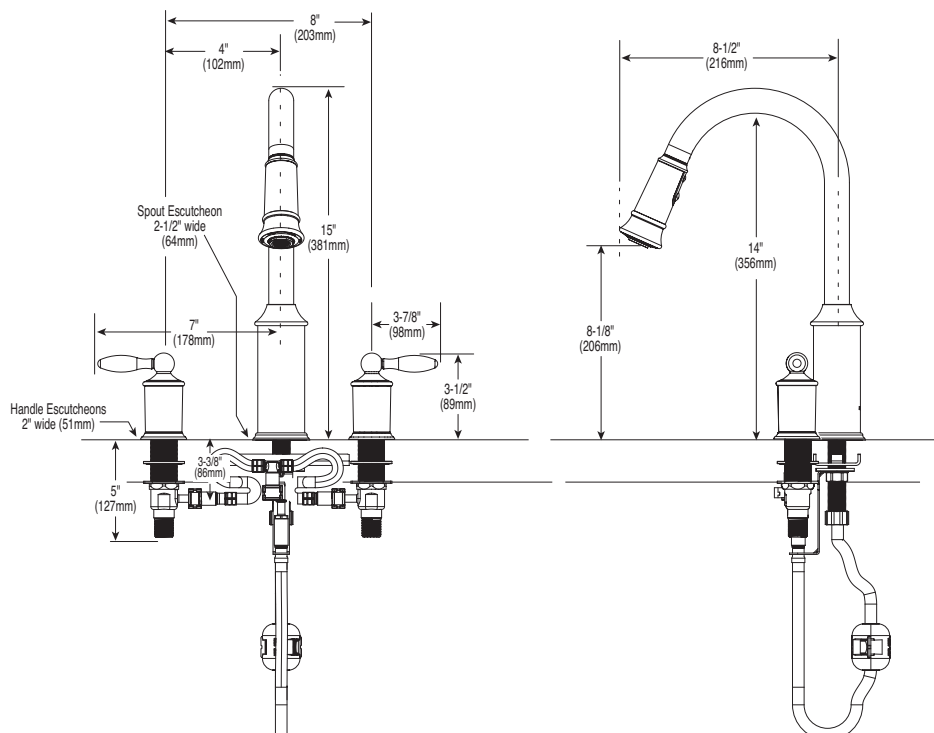

CRITICAL DIMENSIONS

(DO NOT SCALE)

FAUCET DESCRIPTION

- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Hydrolock™ quick connect installation
- Metal construction with 4 finishes
- Includes 59" hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to CSA B125 and ASME A112.18.1M and all applicable requirements therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

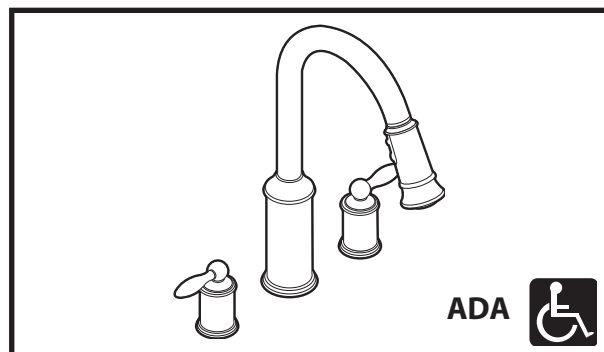

Aberdeen™ Two Handle High Arc Pull Down Kitchen Faucet

Models: 7592C, 7592CP,
7592CPR, 7592SL

NOTE: DESIGNED TO INSTALL
THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.

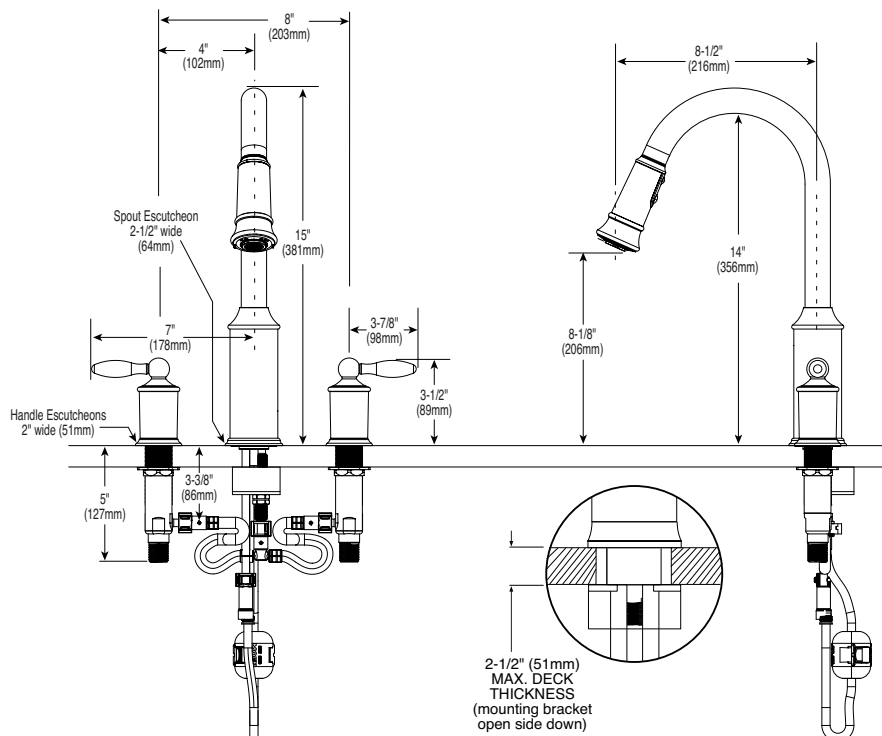

CRITICAL DIMENSIONS

(DO NOT SCALE)