


SPECIFICATION SUBMITTAL SHEET



FEATURES

Sizes: ☐ 1/2" ☐ 3/4" ☐ 1" ☐ 1 1/4" ☐ 1 1/2"
☐ 2" ☐ 2 1/2" ☐ 3"

Pressure / Temperature:

MODEL YB 400 psi@ 180°F WOG

MODEL YBC 400 psi@ 150°F

End Connections Threaded ANSI B 1.20.1
 (Closure plug available but not standard, sizes 1/2" - 2";
 plug standard on 2 1/2" & 3")

OPTIONS

(Suffixes can be combined)

- ☐ X - less tapped access cover
- ☐ P - with tapped access cover & pipe plug
- ☐ C - with copper sweat connections (1/2" - 2")
- ☐ 40 - with 40 mesh strainer screen
- ☐ 60 - with 60 mesh strainer screen
- ☐ 80 - with 80 mesh strainer screen
- ☐ 100 - with 100 mesh strainer screen

APPLICATION

Designed for installation on potable water lines to protect against sediment and debris.

STANDARDS COMPLIANCE

- ☐ Conformance to MIL-S-16293

MATERIALS

Main valve body Cast Bronze ASTM B 584


Access covers Bronze ASTM B 584 or
 Brass ASTM B 16

Screens 20 Mesh Stainless Steel, 300 Series

DIMENSIONS & WEIGHTS (do not include pkg.)


MODEL YB (NPT CONNECTION)								
SIZE		DIMENSIONS (approximate)					WEIGHT	
		A		B		C		
in.	mm	in.	mm	in.	mm	in.	lbs.	kg.
1/2	15	3 1/8	79	2	51	3/8 NPT	1	0.5
3/4	20	3 5/16	84	2 5/16	58	1/2 NPT	1	0.5
1	25	4 1/2	114	3	76	3/4 NPT	2	1
1 1/4	32	4 11/16	119	4 5/8	117	3/4 NPT	4	2
1 1/2	40	5 3/16	130	5 1/8	130	3/4 NPT	5	2.5
2	50	6 1/8	156	6 1/4	159	3/4 NPT	7	3
2 1/2	65	8 1/4	210	7	178	1/2 NPT	14	6.5
3	80	11 1/8	282	7 1/2	191	1/2 NPT	25	11.5

MODEL YBC (COPPER SWEAT CONNECTION)								
SIZE		DIMENSIONS (approximate)					WEIGHT	
		A		B		C		
in	mm	in.	mm	in.	mm	in.	lbs.	kg
1/2	15	3 5/16	84	2	51	3/8 NPT	1	0.5
3/4	20	3 3/4	95	2 5/16	58	1/2 NPT	1	0.5
1	25	5	127	3	76	3/4 NPT	2	1
1 1/4	32	5 5/8	143	4 5/8	117	3/4 NPT	4	2
1 1/2	40	6 7/16	164	5 1/8	130	3/4 NPT	5	2.5
2	50	7 3/8	187	6 1/4	159	3/4 NPT	7	3

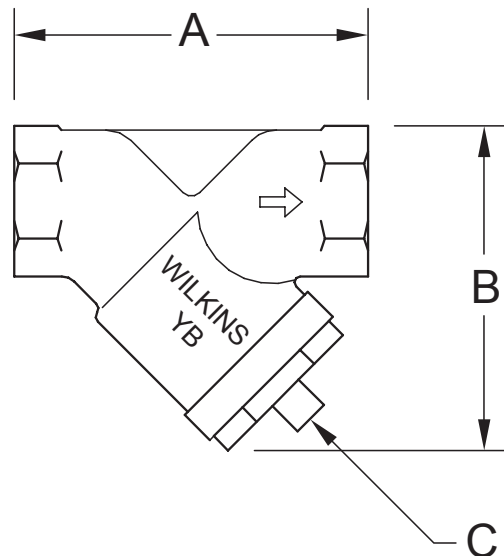


FLOW CHARACTERISTICS

MODEL YB 1/2" thru 1 1/4" (STANDARD & METRIC)

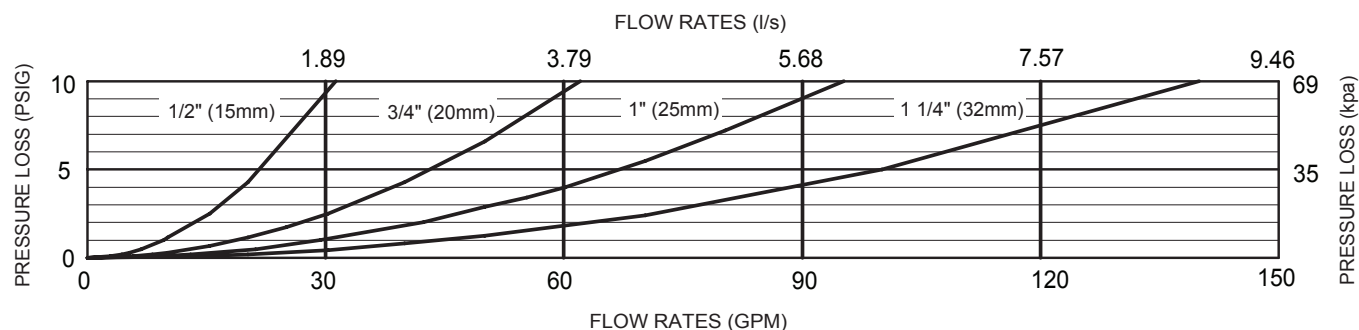


MODEL YB 1 1/2" thru 3" (STANDARD & METRIC)

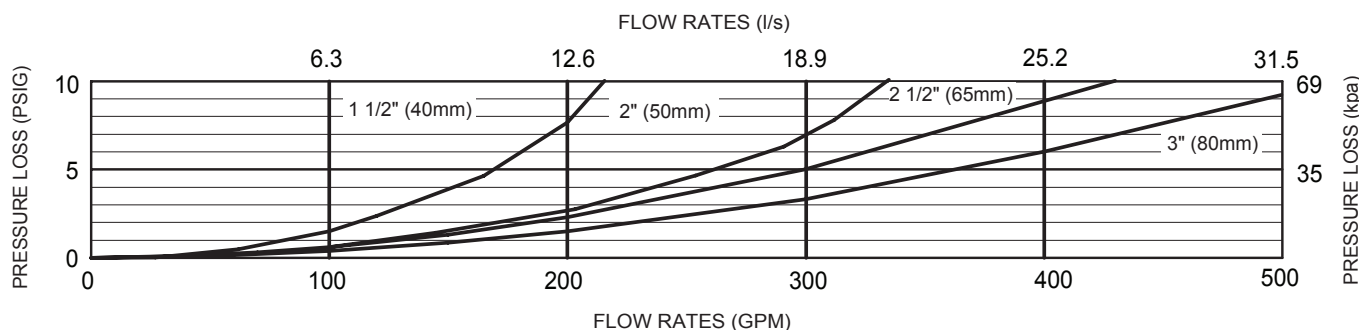

TYPICAL INSTALLATION


Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted in accordance with the latest edition of the Uniform Plumbing Code. If installed below grade, be certain adequate drainage is provided to prevent the device from being submerged. Horizontal installation with the strainer cap facing downward is the preferred installation orientation; however the strainer will provide protection in any orientation.

PROTECTIVE ENCLOSURE
MODEL 975XL REDUCED PRESSURE BACKFLOW PREVENTER

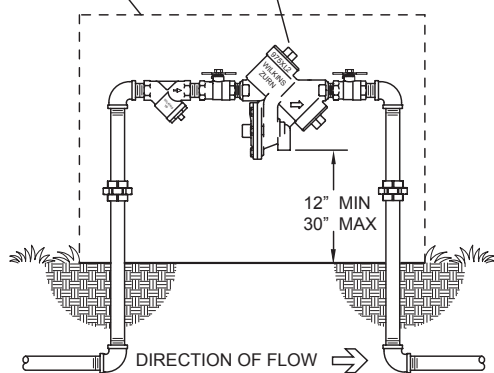

TYPICAL INSTALLATION

PROTECTIVE ENCLOSURE
MODEL 500 WATER PRESSURE REDUCING VALVE

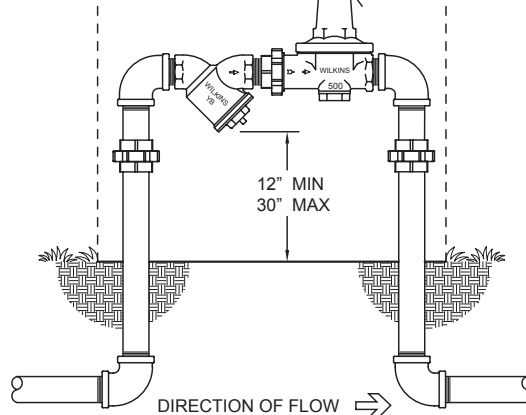

TYPICAL INSTALLATION

SPECIFICATIONS

The "Y" type strainer shall be domestically manufactured and conform to MIL-S-16293. The main body shall be bronze (ASTM B 584), the access cover shall be yellow brass (ASTM B 16) or cast bronze (ASTM B 584), the strainer screen shall be 300 series stainless steel and available in 20, 40, 60, 80 or 100 mesh. Screens shall be accessible for cleaning without removing the device from the line. The "Y" type strainer shall be a WILKINS Model YB.