



Portrait®

5.5' Bath

K-1454



Features

- Center drain.
- Integral lumbar support.
- Coordinates with other products in the Portrait® collection.
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

Material

- Acrylic

Installation

- Drop-in

Recommended Accessories

K- 7161-AF Bath Drain

T16122

K- 300-K 1/2" Ceramic High-flow Valve System

K- 24916 Wireless Music Kit



Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662






Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | NY | Dune |
|  | G9 | Sandbar |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

3-27-2016 05:51

THE BOLD LOOK
OF **KOHLER®**

No change in measurement if connected with drain illustrated. (K-7161-AF)

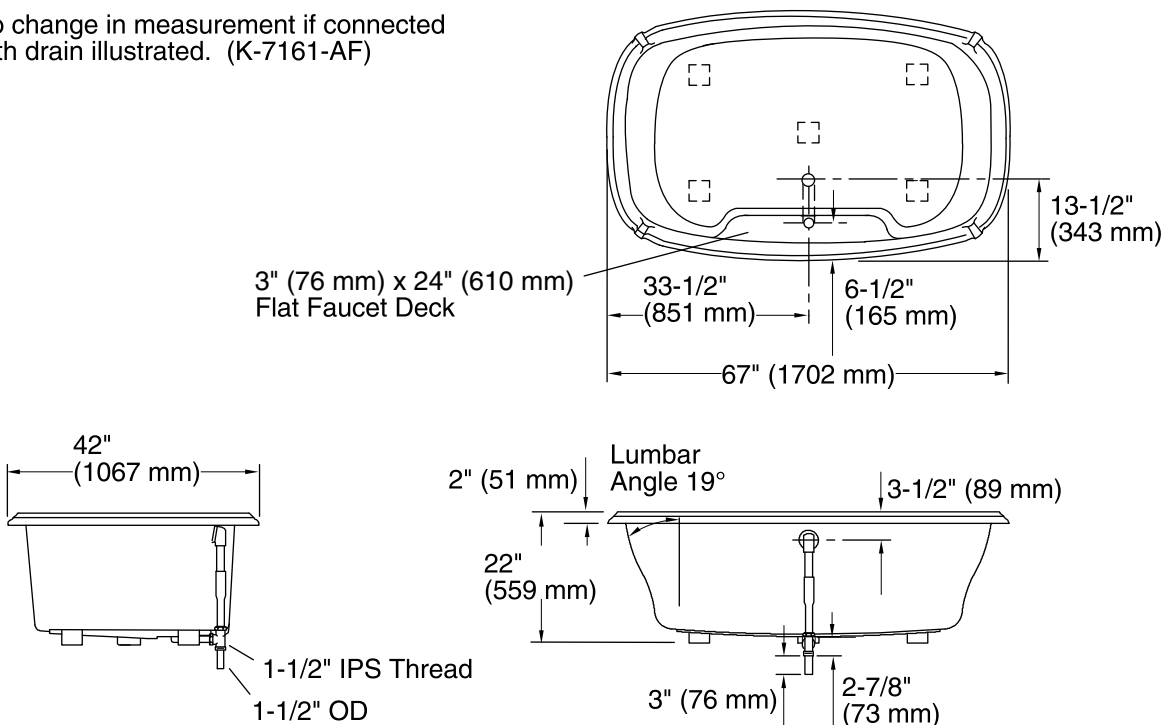

Technical Information

All product dimensions are nominal.

| | |
|---------------------|---|
| Installation: | Drop-in |
| Drain location: | Center |
| Basin area, bottom: | 50" x 29" (1270 mm x 737 mm) |
| Basin area, top: | 61" x 32" (1549 mm x 813 mm) |
| Weight: | 80 lbs (36.3 kg) |
| Minimum floor load: | 47 lbs/ft ² (229.5 kg/m ²) |
| Water depth: | 16" (406 mm) |
| Water capacity: | 98 gal (371 L) |
| Template: | Drop-in, 113311-7, required, included |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.