



PR-50R6

Insulated Class 1 Flexible Air Duct

PRODUCT DATA & SUBMITTAL

PHYSICAL DESCRIPTION

PR-50R6 (50' length) flexible duct is constructed with a spring steel wire helix, encapsulated in a 2-ply, air-tight inner-core. R6 fiberglass insulation encompasses the core and a black polyethylene vapor barrier surrounds the entire duct.

PRODUCT DATA

Diameter: 4", 5", 6", 7", 8", 9", 10"

Length: 50 ft.

Packaging: 1 section per package.

Vapor-Barrier: Black Polyethylene

End Treatments: Raw Ended

Inner Core: 2-Ply Polyester

PERFORMANCE DATA

Thermal Value: R6 Classified by Underwriters Laboratories, Inc. and bears the ADC Thermal Certification Mark. Owen Corning Fiberglass with green Guard Certification.

Maximum Positive Pressure: 6" W.G.
determined per ADC Test FD-72R1 at elevated temperatures with a 90° elbow.

Maximum Negative Pressure: 1" W.G.

Vapor Barrier: Flexible air ducts are for indoor applications only and should not be exposed to direct ultraviolet light.

Maximum Velocity: 4,000 FPM

Operating Temperature: 0-200° F

Perms: (Vapor-Barrier) 0.19 US Perms per ASTM E96A-94.

FEATURES & BENEFITS

The longest insulated flex available.

3/8" oversize inner-core


5 Year Limited Warranty

Fewer field splices

More cutting divisibles

New space saving carton


Guaranteed out of package lengths

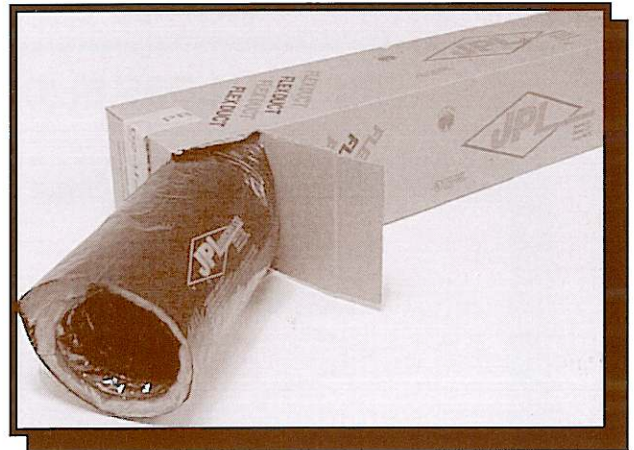

CODE COMPLIANCE & APPROVALS

Listed & Labeled Underwriters Laboratories, Inc. File # MH11637 UL-181 Class 1 Air Duct. Flame Spread 25 or Less / Smoke Developed 50 or Less. Meets the requirements of NFPA 90A & 90B & UMC 6-1. Licensed as a California Insulation Manufacturer # TD-1092.

AIR FRICTION LOSS DATA

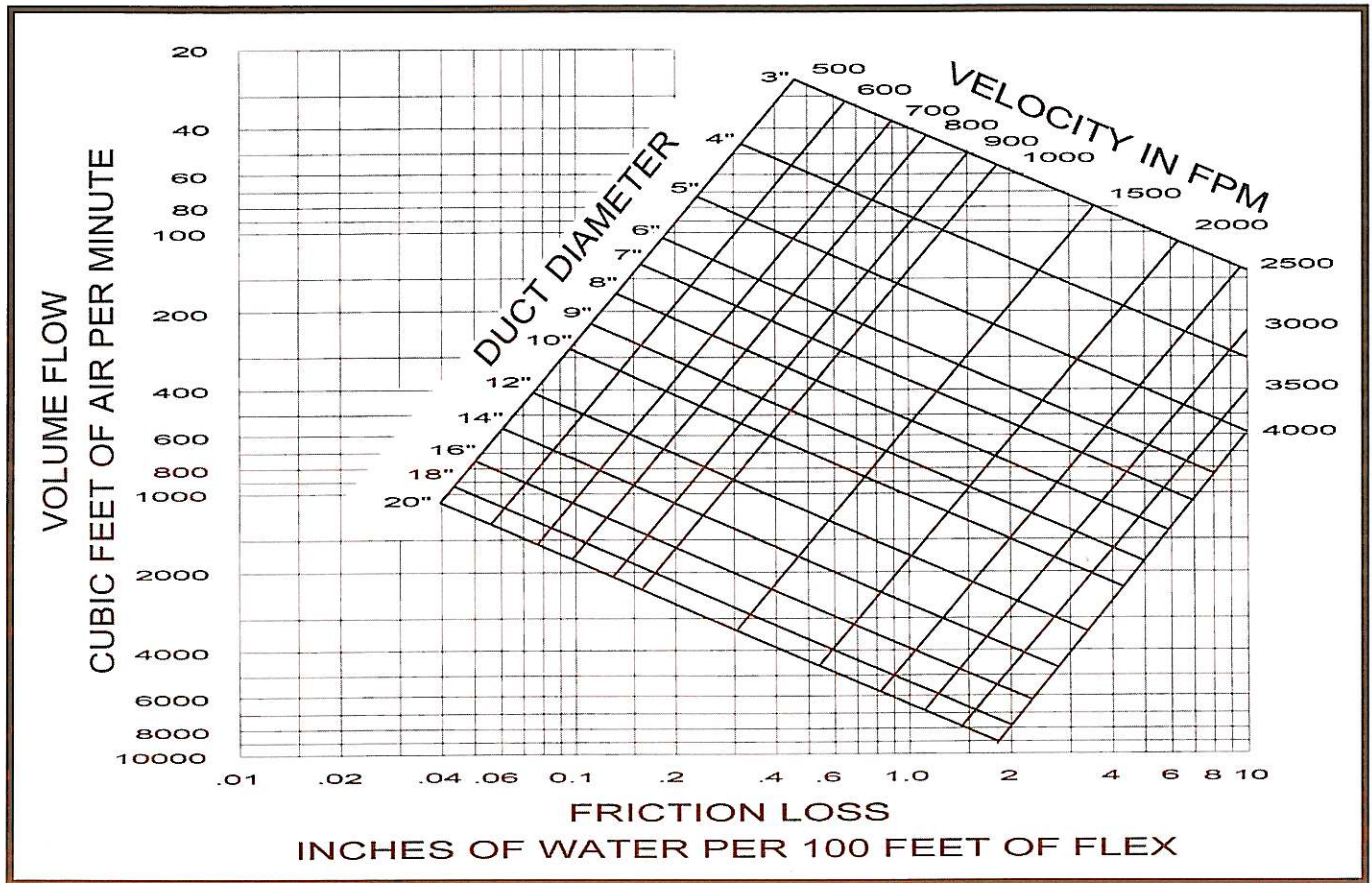


FRICTION LOSS SLIDE CHART CALCULATORS AVAILABLE



TEN YEAR LIMITED WARRANTY

J.P. LAMBORN CO. warrants that all of its UL-181 Flexible Air Ducts (the "Product") will be free from defects in materials and workmanship under normal use for a period of ten (10) years from date of manufacture.* This warranty shall apply only to the Product when installed in the U.S.A. in accordance with J.P. LAMBORN CO.'s written installation instructions and within the conditions and limitations of the published performance data.

Contact Company for details and limitations.



★ Specifications subject to change without notice. ★

Proper use and installation of these products shall be in accordance with UL-181 and ADC recommended installation Instructions in each package.