

AIR PRODUCTS

The Leading Manufacturer of Air Compressors for the Fire Protection Industry

LOW PRESSURE OILLESS RISER MOUNTED COMPRESSORS for Dry Pipe Sprinkler Systems





- 1/2" Outlet Connections
- Thermal Overload Protection
- Riser Mounting Kit Included with "AC" Models
- Fills System to 20 PSI in 30 Minutes (NFPA 13)
- Fully Automatic
- Direct Drive
- Air Intake Filter(s)
- Oil Less Piston Compressor
- UL Listed Pressure Switch
- Bubble Tight Air Check Valve
- Permanently Lubricated Bearings



60 Cycle Units (50 Cycle Available)

System Capacity		Model Number	Motor H.P.	Min. Wire Size ++	Dimensions			Weight (lbs.)
	gallons)**			0.20 11	L	W	Н	(,
	290†	OL11016AC-LP	1/6	12	14	9	9	31
	475†	OL21533AC-LP	1/3	10	16	9	10	37
	780	OL33550AC-LP	1/2	8	16	11	9	49
	935	OL435V75AC-LP	3/4	8	20	14	10	54





- ++ Based on 100 foot run. Consult Factory for longer or shorter runs.
- ** Based on 70 degree F system temp. For other conditions consult factory for pump up times.
- † 115 volt only, ‡ 230 volt only, all other units 115/230 volt.

Low Pressure Units Set At 13 psi cut in, 18 psi cut out

Magnetic Line Starters - Thermal Overload Protection

	3	singie Phase		
	115V	230V	Size	Model
	1/3 HP	1 HP	00	MG00A*
Maximum	1 HP	2 HP	0	MGX0A*
HP	2 HP	3 HP	1	MG01A*
	3 HP	5 HP	1P	MG15A*

When Ordering a Magnetic Line Starter you must specify HP, Voltage and Phase that is supplied to the motor.

Call 1-800-345-8207


Fax: 610-524-8965

E-Mail: genairpro@generalairproducts.com Remember - You can find this sheet and more at

www.GENERALAIRPRODUCTS.com

RISER MOUNT OIL-LESS COMPRESSORS INSTALLATION INSTRUCTIONS



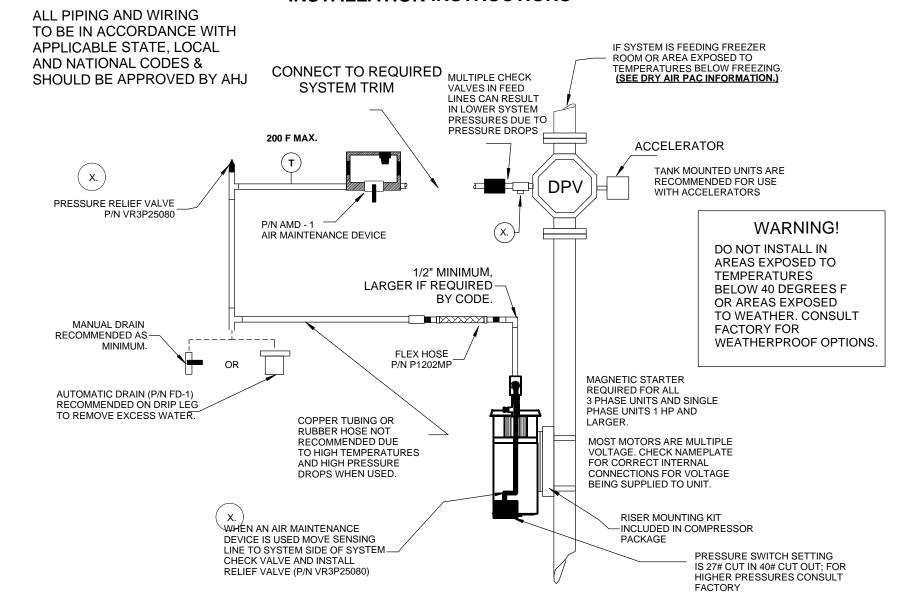

PART NUMBERS LISTED ARE FOR ACCESSORY ITEMS RECOMMENDED FOR COMPLETE INSTALLATION - CONSULT YOUR LOCAL DISTRIBUTOR FOR AVAILABILITY