



60 x 32 Plus A Series Whirlpool & Soaking Baths

Product Features

- Durable easy-care acrylic construction
- Textured slip-resistant bottom
- Eight adjustable, color matched hydro jets, including two lumbar jets
- Heater blank, safety suction and silent air induction
- Available as an invigorating whirlpool and an unjetted soaking bath
- Air activated on/off switch

General Specifications

- 60" length overall
- 32" width overall
- 19 1/2" overall height
- 40 gallon operating capacity
- 50 gallon total capacity to overflow
- Pre-wired for simple plug-in installation
- Requires a single 115V/20 amp GFCI circuit




PFWPLUSA6032WH

Shown with optional removable apron

Model Numbers

PFWPLUSA6032	60" x 32" acrylic whirlpool
PFS6032A	60" x 32" acrylic soaking bath
PFSK60	5' removable apron
PFSK60RP	5' removable panel apron
PFTLK	Tile flange kit
MIRPRESSHTR	Whirlpool heater

Product Specifications

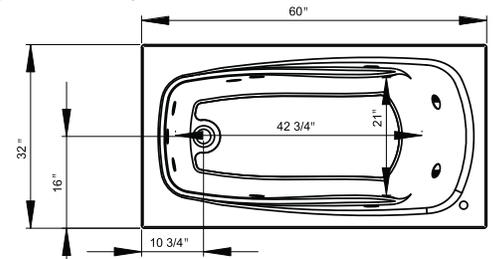


Recommended Parts

MB138882	17-22 PVC Cable drain w/ trim - BN
MB138883	17-22 PVC Cable drain w/ trim - CP
MB138884	17-22 PVC Cable drain w/ trim - ORB
MB138885	17-22 ABS Cable drain w/ trim - BN
MB138886	17-22 ABS Cable drain w/ trim - CP
MB138887	17-22 ABS Cable drain w/ trim - ORB

Color Palette

- White - WH
- Biscuit - BS

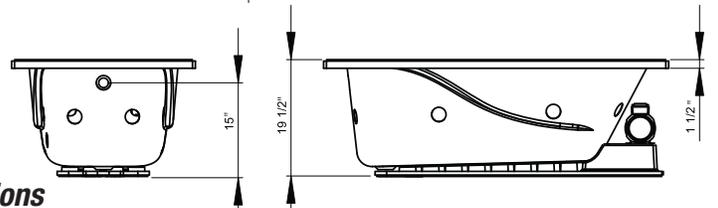

Installation Instructions

Never allow the weight of the tub to be supported by lip on deck or stringers, as this could result in product failure and void the Warranty. If utilities are available, level and fill tub with water and test for proper operation and drainage or possible water leaks due to transit/handling damage. It is REQUIRED that the tub be supported by the tub bottom and not the tub lip. The lip should only rest on the finished deck surface or support stringers. The tub bottom must be supported by a setting compound such as cement or mortar (fast cure materials are not recommended due to excessive shrinkage). Failure to use a suitable setting compound will void the warranty. A sheet of plastic film on top of compound, is recommended as a barrier. The tub should be set in place (do not handle whirlpool by piping) while compound is still soft so that the compound will conform to the tub bottom. Tub should be worked down into compound so the lip of the tub just makes contact with finished deck surface or support stringers. It may be necessary to partially fill tub with water to aid in properly setting the tub.

NOTE: All dimensions and specifications are nominal and may vary $\pm \frac{1}{4}$ ".
Use actual products for accuracy in critical situations.

Distributed Exclusively by Ferguson and Wolseley Canada

