





2115R

FEATURES

PERFORMANCE

- 3.0 cubic feet overall capacity maximizes storage
- Touch glass digital control featuring easy view command center manages key functions and provides user alerts such as an audible door open alarm
- Digital controlled single zone passive cooling system provides a stable and consistent environment for optimum food and beverage storage
- Temperature setting from 34 to 45° F
- Sabbath / Blackout mode turns off all lighting, controls display and automatically resets after 36 hours
- ENERGY STAR® / CEE Tier | rated
- UL residential and commercial listings
- · Automatic defrost
- Lighted white interior optimizes easy viewing of contents
- Three tempered glass shelves with bullnose edge to maximize storage potential
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Two adjustable door bins allow for flexibility to meet varying food and beverage storage needs
- Full wrap stainless door on stainless model and unit must be ordered right or left hand hinged
- · Vinyl clad textured cabinet is more resistant to scratching, peeling and flaking



2000 SERIES

Single Zone Passive Cooling System featured in 2115R.






INTEGRATION

INTERIOR / EXTERIOR

- Unit can be built-in or freestanding providing a custom aesthetic
- Optional full 3/4" overlay panel on black and white models requires purchase of overlay kit PN: U-OL2115 and can be fully integrated into all styles of cabinetry
- Black and white models will accept a 1/4" insert panel to match surrounding decor
- Allow a 2-1/2" clearance on hinged side for 90° door opening when installed adjacent to a wall (for stainless steel model)
- Allow I/4" width overall for proper installation (see backside for details)
- No additional clearance around sides, top or rear of unit is needed for ventilation
- Durable, factory installed level legs provide a more precise undercounter fit
- Do not obstruct front grille air flow

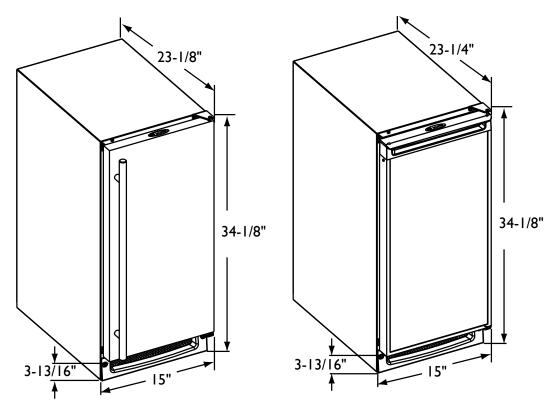

2115RS Stainless Model

2115RB Black Model and 2115RW White Model

DIMENSIONS AND SPECIFICATIONS

OVERALL DIMENSIONS

Height	34-1/8" (86.6)
Width	15" (38.1)
Depth	23-1/4" (59.0)
With stainless steel handle	25-1/8" (63.8)

Shipping weight:

Black and white models	88 lbs (40 kg)
Stainless steel wrap	86 lbs (39 kg)


Running amps	2.4
Maximum start-up amps	9.8

Amps pertain to voltage rating 110/115 volt, 60 Hz ENERGY STAR® and CEE Tier I Rated

Capacities:

Defrost technology Automatic Refrigerator volume 3.0 Cu. Ft

2115R	
Stainless Right-hand	U-2115RS-00
Stainless Left-hand	U-2115RS-01
Black	U-2115RB-00
White	U-2115RW-00
Overlay	U-2115RB-00 with Overlay kit U-OL2115B



Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.

