

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFFS-CIC-S FloodSafe® Braided Stainless Steel Ice Maker Connectors

Series LFFS-CIC-S FloodSafe® Braided Stainless Steel Ice Maker Connectors are designed for use in residential & commercial applications, specifically for hookups to the ice maker water supply. They include a patented FloodSafe® shutoff device on the inlet side to protect against catastrophic water damage. There are no mechanical moving parts during normal operation and no power source is required. FloodSafe® connectors consist of PVC tubing jacketed with braided stainless steel and require no tube cutting, bending, or soldering during installation. Various end connections are available. The LFFS-CIC-S features Lead Free* construction to comply with Lead Free* installation requirements.

Features

- Available in 6', 10' and 20' (183, 305 and 610cm) lengths
- NSF & IAPMO Listed
- Only economical and secure safeguard against catastrophic water damage available on the market
- U.S. Patent No. 7,111,638
- No mechanical moving parts during normal operation, ensuring years of maintenance free operation
- Does not require electricity, batteries or any other source of power
- Installs between the stop valve and the fixture/appliance with the FloodSafe® device located at the stop valve
- FloodSafe® connectors can be easily reset if water flow has been stopped

MODEL	SIZE (DN)		LENGTH		MATERIAL	WEIGHT	
	in.	mm	ft	cm		lbs	kgs
LFFS-CIC-S	1/4 x 1/4	8 x 8	6	183	Stainless Steel	0.80	0.36
LFFS-CIC-S	1/4 x 1/4	8 x 8	10	305	Stainless Steel	1.40	0.63
LFFS-CIC-S	1/4 x 1/4	8 x 8	20	610	Stainless Steel	2.50	1.13

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.


Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca

ES-LFFS-CIC-S 1313

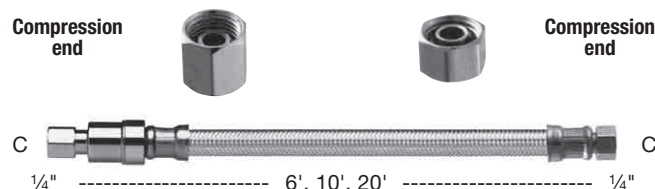

Specifications

A braided stainless steel ice maker connector shall be installed as indicated on the plans. The connector shall have a patented FloodSafe® shutoff device on the inlet side. The connector shall be pressure rated to 125psi (8.75 bar) and be NSF & IAPMO listed. Connector shall be a Watts Series LFFS-CIC-S.

Models

LFFS-CIC-S – All models are supplied with solid brass compression end fittings.

Pressure – Temperature

Maximum Continuous Pressure: 125 psi (8.75 bar)

Maximum Intermittent / Impulse: 180 psi (12.4 bar)

Maximum Continuous Temperature: 160°F (71.1°C)

Maximum Intermittent: 180°F (82°C)



A Watts Water Technologies Company

© 2013 Watts