TECHNICAL SPECIFICATIONS

LUX6032 WRL 2XX LUX6032 WRL 2XX LUX6032 WLR 2XX LUX6032 WLR 2XX LUX6032 WLR 2XX LUX6032 WLR 2XX LUX4032 WLR 2XX

LUX6032 BRX XXX Luxura 5 Bath with 3 Tile Flange Right Hand (H168) LUX6032 BLX XXX Luxura 5 Bath with 3 Tile Flange Left Hand (F943)

KEY DIMENSIONS

DIMENSIONS

60" L x 32" W x 20-1/4" H (1524 mm) L x (813 mm) W x (514 mm) H DRAIN/OVERFLOW A: 15-1/4" (387 mm) B: 8-1/4" (210 mm) CUTOUT Not Applicable TOTAL WEIGHT F941, F942: 697 lb (264 kg) / 52 lb/sq. ft. (255 kg/m²) F943, H168: 672 lb (305 kg) / 50 lb/sg. ft. (246 kg/m²) **OPERATING GALLONAGE** 44 U.S. Gal. (167 Liters) Max. 50 U.S. Gal. (189 Liters) PRODUCT WEIGHT F941, F942: 80 lb (36 kg) F943, H168: 55 lb (25 kg) SKIRT MOUNTING Optional, U-Frame: P/N F954 ELECTRICAL SPECIFICATIONS MODELS F941, F942 ONLY Requires a dedicated GFCI protected separate circuit. Motor/Pump: 120 VAC, 15 AMP, 60 Hz. RapidHeat™: 120 VAC, 15 AMP, 60 Hz. HEATER (OPTIONAL) MODELS F941, F942 ONLY Requires a dedicated GFCI protected separate circuit.

Jacvzzi


INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.


FEATURES, UPGRADES & ACCESSORIES


- Right and Left Hand Drain Location
- Accessories / Hardware:
 - Trip-Lever Drain Kit #X559 Rotary Drain Kit, 26" Cable #8730 TheraPro Jet Trim Kit: #GU44 AccuPro Jet Trim Kit: #GU45
- Trim Kit Finishes Available:
 - (827) Chrome
 - (826) Brushed Nickel
 - (845) Oil Rubbed Bronze



* Measurements inside unit represent cutout in floor to allow for drain/overflow.

Minimum Service Access dimensions given.

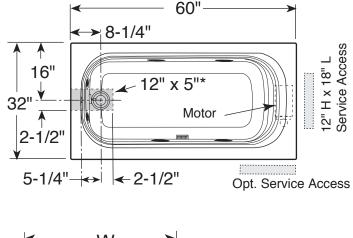

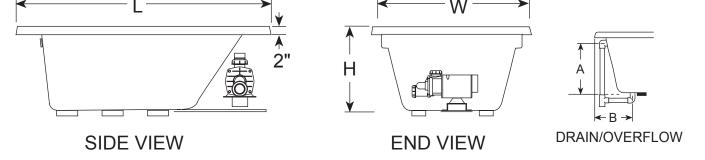

© 2016 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/technicalspecs

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work. PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.