

Residential Power Direct Vent Energy Saver Gas Water Heater



Photo is of
PDX2-65T6FBN

The PDX2 FVIR Defender Safety System® Models Feature:

- **Closed Combustion Venting System**—Power Direct Vent closed combustion system utilizes external air for combustion and exhausts directly to the outside through a separate two-pipe system. The air intake and exhaust vent are 3" connections. The equivalent feet of intake venting cannot be greater than the equivalent feet of exhaust venting.
- **Honeywell Self Diagnostic Electronic Gas Control**—Intelligent gas control with spark to pilot ignition system eliminates the constant burning pilot. This results in savings of pilot gas during stand by periods (120 V.A.C.).
 - **Enhanced Performance**—Proprietary algorithms provide enhanced First Hour Delivery ratings and tighter temperature differentials.
 - **Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain consistent and accurate temperature water temperature levels.
 - **Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides fifteen different diagnostic codes to assist in troubleshooting.
 - **Pilot On Indication**—Flashing green LED provides positive indication that pilot is on.
- **Compatible With Optional Accessory Packages**—Performance Package, Protection Package and Inlet Shut-Off Valve.
- **Cast Aluminum Air Intake Boot**—A cast molded air intake boot design provides exceptional durability during installation and operation.
- **Flammable Vapor Sensor**—Electronic sensor prevents burner operation if flammable vapors are detected. The sensor will also prevent operation if there is ongoing flammable vapor burn inside the combustion chamber.
- **Factory Installed Hydrojet® Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank. Increases first hour delivery of hot water while minimizing temperature build up in tank.
- **Vitraglas® Lining**—Bradford White tanks are lined with an exclusively engineered enamel formula that provides superior tank protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F (871°C).
- **Optional Concentric Vent Kit Termination**—3" termination fitting provides for only one exit opening through a wall or roof. (Subtract 10ft. for intake pipe and 10ft. for exhaust pipe when calculating total vent length.)
- **Horizontal and Vertical Venting**—With 3" or 4" PVC, ABS, or CPVC (Maximum equivalent vent length for each pipe on reverse side).
- **2" Non-CFC Foam Insulation**—Surrounds the tank surface, saving energy by retarding loss of heat.
- **Water Connections**—3/4" NPT factory installed true dielectric fittings.
- **3/4" NPT Side Connections.**
- **Factory Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Magnesium Anode Rod.**
- **T&P Relief Valve**—Included.
- **Low Restriction Brass Drain Valve**—Durable tamper proof design.

FEATURING:



6 or 10-Year Limited Tank Warranties / 6 or 10-Year Limited Warranty on Component Parts

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,954,492; 5,761,379; 5,943,984; 5,081,696; 5,988,117; 6,142,216; 5,199,385; 5,574,822; 5,372,185; 5,485,879; 5,277,171; (B1)5,341,770; 5,660,165; 5,596,952; 5,682,666; 4,904,428; 5,023,031; 5,000,893; 4,669,448; 4,829,983; 4,808,356; 5,115,767; 5,092,519; 5,052,346; 4,416,222; 4,628,184; 4,861,968; 4,672,919; Re. 34,534; 7,270,087 B2. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 1,272,914; 1,280,043; 1,289,832; 2,045,862; 2,112,515; 2,108,186; 2,107,012; 2,092,105; 2,409,271. Defender Safety System®, Vitraglas® and Hydrojet® are registered trademarks of Bradford White® Corporation.

Residential Power Direct Vent Gas Water Heater

PDX2 Energy Saver Models

NATURAL GAS AND LIQUID PROPANE GAS

Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed
80% Recovery Efficiency

Model Number	Capacity				Recovery at 90°F Rise*				A Floor to Exhaust Outlet	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn. in.	F Floor to Space Heating Return in.	G Floor to Space Heating Supply in.	H Floor to Air Intake in.	J Floor to Water Conn. in.	K Depth in.	L Ct. Line Distance From Intake to Exhaust in.	Approx. Shipping Weight lbs.
	U.S. Gal.	Imp. Gal.	Nat. BTU/Hr. Input	LP BTU/Hr. Input	Nat. U.S. GPH	Nat. U.S. GPH	LP U.S. GPH	Imp. U.S. GPH	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
PDX2-50T6FBN	48	40	60,000	60,000	65	54	65	54	68	22	3	52 ¹ / ₄	13 ⁵ / ₈	15 ³ / ₄	52 ¹ / ₄	67	59 ³ / ₄	32	9 ¹ / ₄	303
PDX2-65T6FBN	65	54	65,000	60,000	70	58	65	54	71 ¹ / ₄	24	3	55 ⁵ / ₈	13 ⁵ / ₈	15 ³ / ₄	55 ⁵ / ₈	69 ¹ / ₂	63	34 ¹ / ₈	9 ¹ / ₄	330
PDX2-75T6FBN	75	62	70,000	65,000	75	62	70	58	71	26	3	54 ¹ / ₄	16 ¹ / ₄	19	54 ¹ / ₄	69 ³ / ₈	62 ³ / ₄	36	11 ¹¹ / ₁₆	375


Model Number	Capacity				Recovery at 50°C Rise*				A Floor to Exhaust Outlet	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn. mm.	F Floor to Space Heating Return mm.	G Floor to Space Heating Supply mm.	H Floor to Air Intake mm.	J Floor to Water Conn. mm.	K Depth mm.	L Ct. Line Distance From Intake to Exhaust mm.	Approx. Shipping Weight kg.
	Liters		Nat. kW Input	LP kW Input	Nat. Liters/ Hour	Nat. Liters/ Hour	LP Liters/ Hour		mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
PDX2-50T6FBN	182		17.6	17.6	246	246			1727	559	76	1327	346	400	1327	1701	1517	812	235	137
PDX2-65T6FBN	246		19.0	17.6	265	246			1809	610	76	1489	346	400	1489	1765	1600	867	235	149
PDX2-75T6FBN	284		21.0	19.0	284	265			1803	660	76	1378	413	483	1378	1762	1594	914	297	170

Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "BN" to "SX"

For 10 year model, change suffix "6" to "10".

*Based on manufacturers rated recovery efficiency.

110 V.A.C Required for Power Venting / 110 V.A.C., 60HZ, 3.1 Amperes.

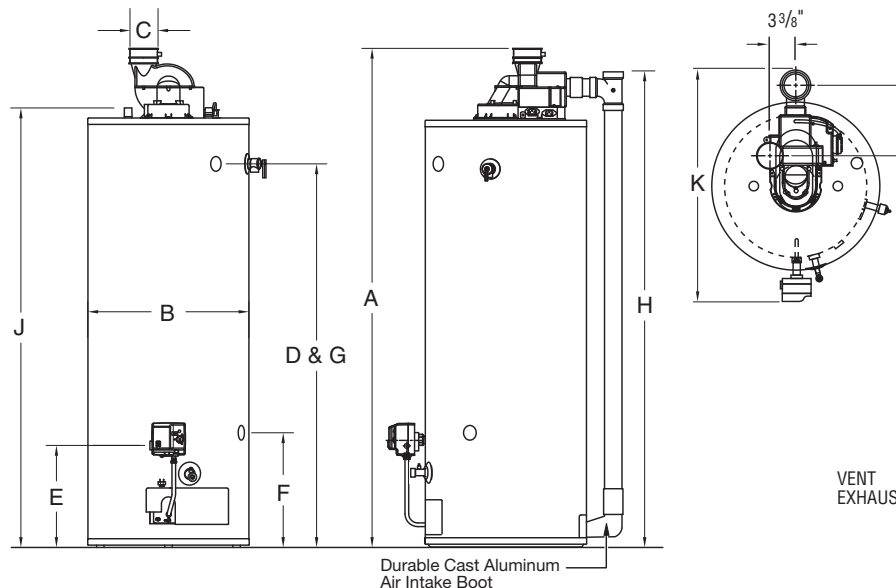


3" Vent Pipe	PDX2-50 PDX2-65	PDX2-75
Max. Intake Length	60 ft.	50ft.
Max. Exhaust Length	60 ft.	50ft.
Min. Vent Length	7 ft.	7ft.
Number of 90° Elbows†	1 55 ft. 2 50 ft. 3 45 ft.	45ft 40ft 35ft.

4" Vent Pipe	PDX2-50 PDX2-65	PDX2-75
Max. Intake Length	100 ft.	90ft.
Max. Exhaust Length	100 ft.	90ft.
Min. Vent Length	7 ft.	7ft.
Number of 90° Elbows†	1 95 ft. 2 90 ft. 3 85 ft.	85ft. 80ft. 75ft.

Subtract 5ft. for each additional 90° elbow.

† Consult I&O Manual when using four or more elbows.

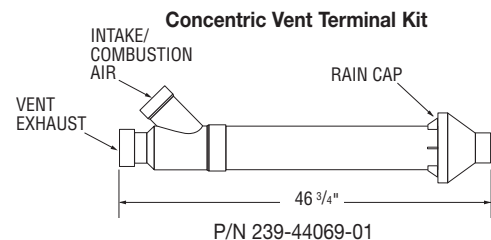

Meets NAECA Requirements

General

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All water connections are 3/4" NPT (19mm) on 11" (203mm) centers. All gas connections are 1/2" (13mm).

All models design certified by CSA International (formerly AGA/CGA), to meet ANSI standard Z-21.10.1 and peak performance rated.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into this system. This unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.



For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com

BRADFORD WHITE-CANADA INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2012, Bradford White Corporation. All rights reserved.