



Decorative Faucets

Application: Drinking Water Systems




Features and Benefits:

- Smooth operating ceramic disk element
- Lever style handle
- High reach neck design of 12" (30.5 cm)
- Neck swivels easily, 360°
- Unique protective spout tip prevents after-drip
- Retrofits most brands
- Base diameter is 2 1/4" (5.7 cm)
- Pre-installed tubing for quick installations
- Mounting hardware included
- For use with air gap and non air gap applications
- Available in the following finishes:
 - Polished chrome
 - Antique bronze
 - Satin nickel
 - Brushed stainless steel
 - Bright nickel
- NSF listed to NSF/ANSI Standard 61
- Two year limited warranty

Made from FDA* CFR-21
Compliant Materials

*Food and Drug Administration

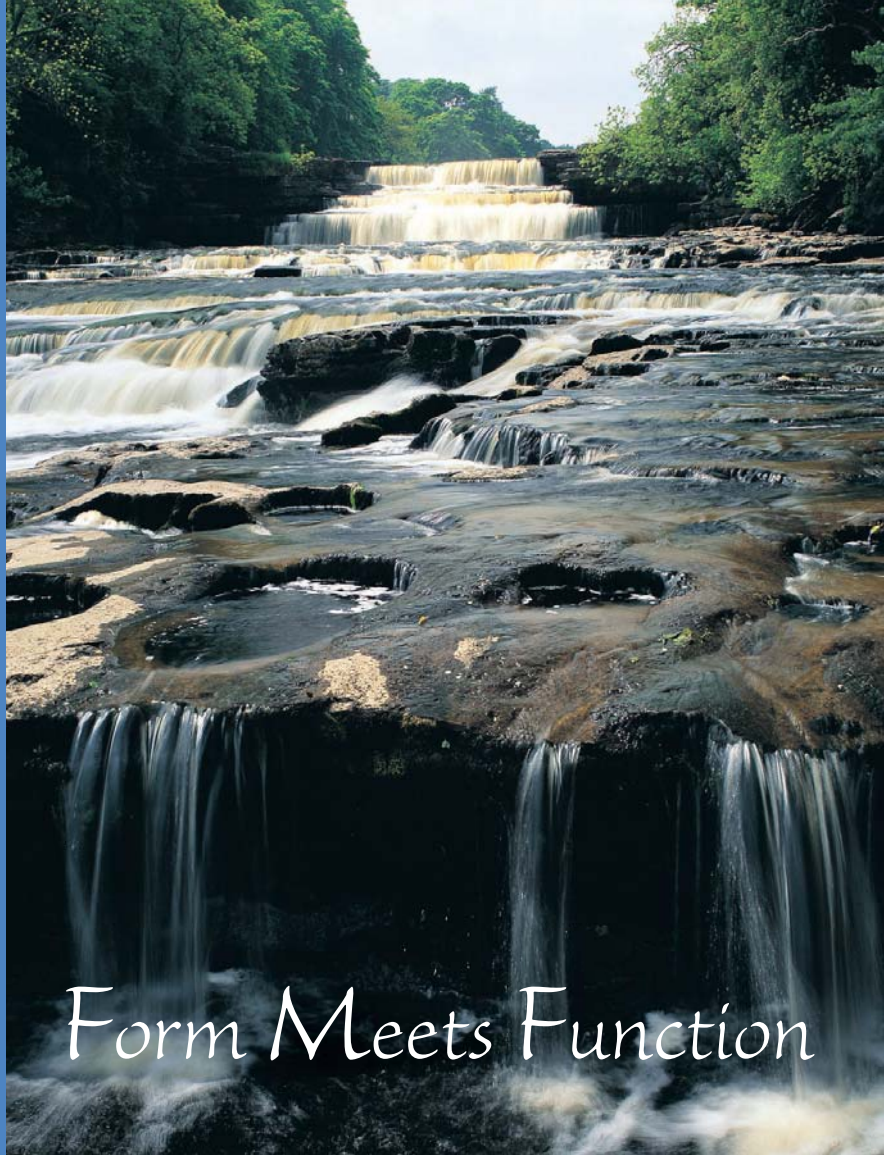

Form Meets Function...with these gracefully arched, contemporary styled decorative drinking water system faucets. Quality materials, including lead-free brass, combined with high style to help deliver cleaner, clearer better tasting drinking and cooking water from an Aqua-Pure® drinking water system.

Choice of the Professional Plumber.





Decorative Faucets

Decorative Faucets

Primary Advantages over our Standard Drinking Water Faucet:

- One system for both air gap and non air gap applications
- Five of today's most popular kitchen and bath finishes
 - Polished chrome
 - Antique bronze
 - Satin nickel
 - Brushed stainless steel
 - Bright nickel
- Pre-installed tubing for quick installations
- Neck swivels 360° for versatile use with glasses, pots and pans
- NSF listed to NSF/ANSI Standard 61
- Two year limited warranty

Product Specifications

Model #	Part #	Finish/Description	Flow Rate	Temperature	Pressure
6BG-CRM	62215-33	Polished Chrome	1.0 gpm (3.8 lpm)	40 - 150°F (4.4 - 65.6°C)	125 psi (862 kPa)
6BG-STN	62215-34	Satin Nickel	1.0 gpm (3.8 lpm)	40 - 150°F (4.4 - 65.6°C)	125 psi (862 kPa)
6BG-ATB	62215-35	Antique Bronze	1.0 gpm (3.8 lpm)	40 - 150°F (4.4 - 65.6°C)	125 psi (862 kPa)
6BG-BTN	62215-36	Bright Nickel	1.0 gpm (3.8 lpm)	40 - 150°F (4.4 - 65.6°C)	125 psi (862 kPa)
6BG-BSS	62215-37	Brushed Stainless Steel	1.0 gpm (3.8 lpm)	40 - 150°F (4.4 - 65.6°C)	125 psi (862 kPa)

⚠ WARNING: To reduce the risk associated with the ingestion of contaminants:
Do not use with water that is microbiologically unsafe or of unknown quality
without adequate disinfection before or after the system.



3M Purification Inc.
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 1-800-222-7880
Worldwide: 203-237-5541
Fax: 203-238-8701
www.aquapure.com • www.3mpurification.com



Visit www.nsf.org for
the claims associated
with products that
are NSF listed.

3M is a trademark of 3M Company.
Aqua-Pure is a trademark of 3M Company.
© 2013 3M Company. All rights reserved.
70020202548 REV 0913b