



VSZ13

SPLIT SYSTEM HEAT PUMP

13 SEER / R-410A

1½ - 5 Tons

NOMINAL COOLING CAPACITY: 17,400 TO 57,000 BTU/H

NOMINAL HEATING CAPACITY: 17,000 TO 58,000 BTU/H



Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Expanded Heating Data	18
AHRI Ratings	20
Dimensions	28
Wiring Diagram	29
Accessories	30

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- SmartShift™ technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Sound control top designed for quiet operation
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Bahama Beige powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.goodmanmfg.com/gmc.

NOMENCLATURE

	V	S	Z	13	036	1	A	A	
	1	2	3	4,5	6,7,8	9	10	11	
Brand									
V	GMC Product Family								
Product Category									
S	Split System								
Unit Type									
C	Condenser R-22								
X	Condenser R-410A								
H	Heat Pump R-22								
Z	Heat Pump R-410A								
Efficiency									
13	13 SEER								
14	14 SEER								
				</					

SPECIFICATIONS

	VSZ13 0181A*	VSZ13 0241C*	VSZ13 0301A*	VSZ13 0361B*	VSZ13 0421A*	VSZ13 0481A*	VSZ13 0601A*
NOMINAL CAPACITIES							
Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Decibels	71	73	72	74	74	76	75
COMPRESSOR							
RLA	9.0	13.5	14.1	16.7	17.9	19.9	26.4
LRA	48.0	58.3	73.0	79.0	112.0	109.0	134.0
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR							
Horsepower	$\frac{1}{6}$	$\frac{1}{8}$	$\frac{1}{6}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{4}$
FLA	0.70	0.70	1.10	1.50	1.50	1.50	1.50
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "
Suction Line Size ("O.D.)	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	$1\frac{1}{8}$ "	$1\frac{1}{8}$ "	$1\frac{1}{8}$ "
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "
Suction Valve Size ("O.D.)	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	$\frac{7}{8}$ "	$\frac{7}{8}$ "
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	121	104	108	100	166	219	240
Shipped with Orifice Size	0.051	0.057	0.065	0.071	0.074	0.078	0.088
ELECTRICAL DATA							
Volts-Hz	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60
Minimum Circuit Ampacity ²	12.4	17.5	18.7	22.4	23.9	26.4	34.5
Max. Overcurrent Protection ³	20	30	30	35	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "	$\frac{1}{2}$ " or $\frac{3}{4}$ "
EQUIPMENT WEIGHT (LBS)	145	136	142	156	202	219	268
SHIP WEIGHT (LBS)	162	153	159	174	220	237	290

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply $\frac{1}{8}$ " to $1\frac{1}{8}$ " adapters for suction line connections.
- Unit is charged with refrigerant for 15' of $\frac{3}{8}$ " liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — VSZ130181A* / AR*F182416**

		OUTDOOR AMBIENT TEMPERATURE																																																																																	
		65°F						75°F						85°F						95°F						105°F						115°F																																																			
		IDB		AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																		
ENTERING INDOOR WET BULB TEMPERATURE																																																																																			
70	675	MBh	17.1	17.7	19.4	-	16.7	17.3	18.9	-	16.3	16.9	18.5	-	15.9	16.4	18.0	-	15.1	15.6	17.1	-	14.0	14.5	15.9	-	15.1	15.6	17.1	-	14.0	14.5	15.9	-																																																	
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-																																																	
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	17	15	11	-	16	14	11	-																																																	
		kW	1.25	1.27	1.31	-	1.34	1.37	1.41	-	1.42	1.45	1.50	-	1.49	1.52	1.57	-	1.55	1.59	1.64	-	1.61	1.64	1.69	-	1.55	1.59	1.64	-	1.61	1.64	1.69	-																																																	
		Amps	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.8	-	6.0	6.2	6.4	-	6.4	6.5	6.8	-																																																	
70	600	Hi PR	225	242	255	-	252	271	287	-	287	309	326	-	327	352	371	-	367	395	418	-	406	437	461	-	367	395	418	-	406	437	461	-																																																	
		Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-	131	140	152	-	136	144	158	-																																																	
		MBh	16.6	17.2	18.8	-	16.2	16.8	18.4	-	15.8	16.4	17.9	-	15.4	16.0	17.5	-	14.6	15.2	16.6	-	13.6	14.0	15.4	-	14.6	15.2	16.6	-	13.6	14.0	15.4	-																																																	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-																																																	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-																																																	
525	525	kW	1.24	1.26	1.30	-	1.33	1.36	1.40	-	1.41	1.44	1.48	-	1.48	1.51	1.56	-	1.54	1.57	1.62	-	1.59	1.63	1.68	-	1.54	1.57	1.62	-	1.59	1.63	1.68	-																																																	
		Amps	4.5	4.6	4.7	-	4.8	4.9	5.1	-	5.2	5.4	5.6	-	5.6	5.7	5.9	-	6.0	6.1	6.3	-	6.3	6.5	6.7	-	6.0	6.1	6.3	-	6.3	6.5	6.7	-																																																	
		Hi PR	222	239	253	-	250	269	284	-	284	306	323	-	323	348	368	-	364	392	413	-	402	433	457	-	364	392	413	-	402	433	457	-																																																	
		Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	130	138	151	-	134	143	156	-																																																	
		MBh	15.3	15.8	17.4	-	14.9	15.5	16.9	-	14.6	15.1	16.5	-	14.2	14.7	16.1	-	13.5	14.0	15.3	-	12.5	13.0	14.2	-	13.5	14.0	15.3	-	12.5	13.0	14.2	-																																																	
75	675	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.78	0.66	0.45	-	0.78	0.65	0.45	-	0.78	0.66	0.45	-																																																	
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-																																																	
		kW	1.21	1.23	1.27	-	1.30	1.32	1.36	-	1.38	1.40	1.45	-	1.44	1.47	1.52	-	1.50	1.53	1.58	-	1.55	1.59	1.64	-	1.50	1.53	1.58	-	1.55	1.59	1.64	-																																																	
		Amps	4.3	4.5	4.6	-	4.7	4.8	5.0	-	5.1	5.2	5.4	-	5.5	5.6	5.8	-	5.8	5.9	6.1	-	6.1	6.3	6.5	-	5.8	5.9	6.1	-	6.1	6.3	6.5	-																																																	
		Hi PR	216	232	245	-	242	261	275	-	275	296	313	-	314	338	356	-	353	380	401	-	390	420	443	-	353	380	401	-	390	420	443	-																																																	
75	600	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	126	134	146	-	130	139	151	-																																																	
		MBh	16.8	17.3	18.8	20.1	16.4	16.9	18.3	19.7	16.1	16.5	17.9	19.2	15.7	16.1	17.5	18.7	14.9	15.3	16.6	17.8	13.8	14.2	15.4	16.5	14.9	15.3	16.6	17.8	13.8	14.2	15.4	16.5																																																	
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40																																																	
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	21	19	16	11	20	18	15	10																																																	
		kW	1.25	1.27	1.31	1.35	1.34	1.37	1.41	1.45	1.42	1.45	1.50	1.54	1.49	1.52	1.57	1.62	1.55	1.59	1.64	1.69	1.61	1.64	1.69	1.75	1.55	1.59	1.64	1.69	1.61	1.64	1.69	1.75																																																	
525	525	Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.5	6.8	7.0	6.0	6.2	6.4	6.6	6.4	6.5	6.8	7.0																																																		
		Hi PR	225	242	255	266	252	271	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	461	481	368	396	418	436	406	437	461	481																																																	
		Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168	131	140	153	162	136	145	158	168																																																	
		MBh	15.5	16.0	17.3	18.6	15.2	15.6	16.9	18.2	14.8	15.3	16.5	17.7	14.5	14.88	16.1	17.3	13.7	14.1	15.3	16.4	12.7	13.1	14.2	15.2	13.7	14.1	15.3	16.4	12.7	13.1	14.2	15.2																																																	
		S/T	0.78	0.69	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39																																																	
75	675	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	21	20	16	11	20	18	15	10																																																	
		kW	1.22	1.24	1.28	1.32	1.31	1.33	1.38	1.42	1.39	1.42	1.46	1.51	1.46	1.49	1.53	1.58	1.51	1.55	1.60	1.65	1.57	1.60	1.65	1.71	1.51	1.55	1.60	1.65	1.57	1.60	1.65	1.71																																																	
		Amps	4.4	4.5	4.6	4.8	4.7	4.9	5.0	5.2	5.3	5.4	5.5	5.7	5.5	5.6	5.8	6.0	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.2	6.4	6.6	6.2	6.4	6.6	6.8																																																		
		Hi PR	218	235	248	258	245	263	278	290	278	299	316	330	317	341	360	376	357	384	405	423	394	424	448	467	357	384	405	423	394	424	448	467																																																	
		Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163	127	136	148	158	132	140	153	163																																																	
IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction service valves.																												Shaded area reflects ACCA (TVA) Rating Conditions																												kW = Total system power Amps = Outdoor unit amps (compressor + fan)																											

EXPANDED COOLING DATA — VSZ130181A* / AR*F182416** (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
		AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	675	MBh	17.65	18.03	19.27	20.60	17.24	17.61	18.82	20.12	16.83	17.19	18.37	19.64	16.42	16.77	17.92	19.16	15.60	15.94	17.03	18.20	14.45	14.76	15.77	16.86					
		S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.61					
		ΔT	22	21	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	17	14					
		kW	1.27	1.29	1.33	1.37	1.36	1.39	1.43	1.48	1.44	1.47	1.52	1.57	1.52	1.55	1.60	1.65	1.58	1.61	1.66	1.72	1.63	1.67	1.72	1.78					
	Amps	4.6	4.7	4.9	5.0	5.0	5.1	5.3	5.4	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.8	6.5	6.7	6.9	7.2						
	Hi PR	229	247	261	272	257	277	292	305	293	315	333	347	333	359	379	395	375	404	426	444	414	446	471	491						
	Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171						
	600	MBh	17.1	17.5	18.7	20.0	16.7	17.1	18.3	19.5	16.3	16.7	17.8	19.1	15.9	16.3	17.4	18.6	15.1	15.5	16.5	17.7	14.0	14.3	15.3	16.4					
S/T		0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58						
ΔT		23	22	19	15	23	23	20	16	24	23	20	16	24	23	20	16	23	22	19	16	21	21	18	15						
kW		1.26	1.28	1.32	1.36	1.35	1.38	1.42	1.46	1.43	1.46	1.51	1.56	1.50	1.54	1.59	1.64	1.57	1.60	1.65	1.70	1.62	1.65	1.71	1.76						
525	675	Amps	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.1					
		Hi PR	227	244	258	269	255	274	290	302	290	312	329	343	330	355	375	391	371	400	422	440	410	441	466	486					
		Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170					
		MBh	15.8	16.2	17.3	18.5	15.4	15.8	16.9	18.0	15.1	15.4	16.5	17.6	14.7	15.0	16.1	17.2	14.0	14.3	15.3	16.3	12.9	13.2	14.1	15.1					
	600	S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56					
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15					
		kW	1.23	1.25	1.29	1.33	1.32	1.34	1.39	1.43	1.40	1.43	1.47	1.52	1.47	1.50	1.55	1.60	1.53	1.56	1.61	1.66	1.58	1.61	1.67	1.72					
		Amps	4.4	4.5	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.6	6.9					
85	675	Hi PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	364	379	360	388	409	427	398	428	452	472					
		Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165					
		MBh	17.96	18.30	19.17	20.45	17.54	17.88	18.72	19.98	17.12	17.45	18.28	19.50	16.70	17.03	17.83	19.02	15.87	16.18	16.94	18.07	14.70	14.98	15.69	16.74					
		S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	0.90	0.73	0.56	1.00	0.98	0.89	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79					
	600	ΔT	24	23	22	19	24	24	22	19	23	24	22	19	23	23	23	20	22	22	22	19	20	20	21	18					
		kW	1.28	1.30	1.34	1.38	1.37	1.40	1.44	1.49	1.45	1.49	1.53	1.58	1.53	1.56	1.61	1.66	1.59	1.63	1.68	1.73	1.65	1.68	1.74	1.79					
		Amps	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.6	6.8	6.6	6.7	7.0	7.2					
		Hi PR	232	249	263	275	260	280	295	308	296	318	336	350	337	362	383	399	379	408	430	449	418	450	475	496					
525	Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173						
	MBh	17.4	17.8	18.6	19.9	17.0	17.4	18.2	19.4	16.6	16.9	17.7	18.9	16.2	16.5	17.3	18.5	15.4	15.7	16.4	17.5	14.3	14.5	15.2	16.3						
	S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75						
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	24	24	23	20	22	22	22	19						

EXPANDED COOLING DATA — VSZ130241C*/AR*F182416**

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-				
	S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-				
	ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	17	15	11	-	16	14	11	-				
	KW	1.63	1.66	1.71	-	1.75	1.78	1.84	-	1.85	1.89	1.95	-	1.95	1.99	2.05	-	2.03	2.07	2.14	-	2.10	2.14	2.21	-	2.03	2.07	2.14	-	2.10	2.14	2.21	-				
	Amps	6.1	6.2	6.4	-	6.5	6.7	6.9	-	7.1	7.3	7.5	-	7.6	7.8	8.0	-	8.1	8.3	8.5	-	8.5	8.8	9.0	-	8.1	8.3	8.5	-	8.5	8.8	9.0	-				
800	Hi Pr	228	246	259	-	256	276	291	-	291	314	331	-	332	357	377	-	373	402	424	-	413	444	469	-	373	402	424	-	413	444	469	-				
	Lo Pr	103	110	120	-	109	116	127	-	114	121	132	-	119	127	139	-	125	133	145	-	129	138	150	-	125	133	145	-	129	138	150	-				
	MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-				
	S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-				
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-				
700	KW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.93	1.97	2.04	-	2.01	2.05	2.12	-	2.08	2.12	2.19	-	2.01	2.05	2.12	-	2.08	2.12	2.19	-				
	Amps	6.0	6.2	6.3	-	6.5	6.6	6.9	-	7.0	7.2	7.4	-	7.5	7.7	8.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-				
	Hi Pr	226	243	257	-	254	273	288	-	288	310	328	-	329	354	373	-	370	398	420	-	408	440	464	-	370	398	420	-	408	440	464	-				
	Lo Pr	102	109	119	-	108	115	126	-	112	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-	124	132	144	-	128	136	149	-				
	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-				
700	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-				
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-				
	KW	1.58	1.61	1.66	-	1.69	1.73	1.78	-	1.80	1.83	1.89	-	1.89	1.93	1.99	-	1.96	2.00	2.07	-	2.03	2.07	2.14	-	1.96	2.00	2.07	-	2.03	2.07	2.14	-				
	Amps	5.9	6.0	6.2	-	6.3	6.5	6.7	-	6.8	7.0	7.2	-	7.3	7.5	7.7	-	7.8	8.0	8.2	-	8.2	8.4	8.7	-	7.8	8.0	8.2	-	8.2	8.4	8.7	-				
	Hi Pr	219	236	249	-	246	265	280	-	280	301	318	-	319	343	362	-	359	386	407	-	396	426	450	-	359	386	407	-	396	426	450	-				
700	Lo Pr	99	106	115	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	139	-	124	132	144	-	120	128	139	-	124	132	144	-				

900	MBh	22.92	23.60	25.54	27.41	22.39	23.05	24.95	26.78	21.85	22.50	24.36	26.14	21.32	21.95	23.76	25.50	20.25	20.85	22.57	24.23	18.76	19.32	20.91	22.44
	S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43
	ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	11	19	17	14	10
	KW	1.64	1.67	1.73	1.78	1.76	1.80	1.85	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.04	2.09	2.16	2.23	2.11	2.16	2.23	2.30
	Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.2	7.2	7.3	7.6	7.9	7.7	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
800	Hi Pr	231	248	262	273	259	279	294	307	294	317	334	349	335	361	381	397	377	406	429	447	417	448	474	494
	Lo Pr	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162
	MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10
700	KW	1.63	1.66	1.71	1.77	1.75	1.79	1.84	1.90	1.85	1.89	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.28
	Amps	6.1	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.1	8.3	8.5	8.9	8.5	8.8	9.0	9.4
	Hi Pr	228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	373	402	424	443	413	444	469	489
	Lo Pr	103	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160
	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.0	19.6	20.2	21.8	23.4	19.1	19.7	21.3	22.9	18.2	18.7	20.2	21.7	16.8	17.3	18.7	20.1
	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	KW	1.59	1.62	1.67	1.72	1.71	1.74	1.80	1.85	1.81	1.85	1.91	1.97	1.90	1.94	2.00	2.07	1.98	2.02	2.09	2.15	2.05	2.09	2.16	2.23
	Amps	5.9	6.0	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.5	8.8	9.1
	Hi Pr	222	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474
	Lo Pr	100	107	117	124	106	113	123	131	110	117	128	136	116	123	134	143	121	129	141	150	125	133	146	155

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACAA (TVA) Rating Conditions

kW = Total system power
Amps = Outdoor unit amps (compressor + fan)

EXPANDED COOLING DATA — VSZ130241C*/ AR*F182416** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207	211	215	219	223	227	231	235	239	243	247	251	255	259	263	267	271	275	279	283	287	291	295	299	303	307	311	315	319	323	327	331	335	339	343	347	351	355	359	363	367	371	375	379	383	387	391	395	399	403	407	411	415	419	423	427	431	435	439	443	447	451	455	459	463	467	471	475	479	483	487	491	495	499	503	507	511	515	519	523	527	531	535	539	543	547	551	555	559	563	567	571	575	579	583	587	591	595	599	603	607	611	615	619	623	627	631	635	639	643	647	651	655	659	663	667	671	675	679	683	687	691	695	699	703	707	711	715	719	723	727	731	735	739	743	747	751	755	759	763	767	771	775	779	783	787	791	795	799	803	807	811	815	819	823	827	831	835	839	843	847	851	855	859	863	867	871	875	879	883	887	891	895	899	903	907	911	915	919	923	927	931	935	939	943	947	951	955	959	963	967	971	975	979	983	987	991	995	999	1003	1007	1011	1015	1019	1023	1027	1031	1035	1039	1043	1047	1051	1055	1059	1063	1067	1071	1075	1079	1083	1087	1091	1095	1099	1103	1107	1111	1115	1119	1123	1127	1131	1135	1139	1143	1147	1151	1155	1159	1163	1167	1171	1175	1179	1183	1187	1191	1195	1199	1203	1207	1211	1215	1219	1223	1227	1231	1235	1239	1243	1247	1251	1255	1259	1263	1267	1271	1275	1279	1283	1287	1291	1295	1299	1303	1307	1311	1315	1319	1323	1327	1331	1335	1339	1343	1347	1351	1355	1359	1363	1367	1371	1375	1379	1383	1387	1391	1395	1399	1403	1407	1411	1415	1419	1423	1427	1431	1435	1439	1443	1447	1451	1455	1459	1463	1467	1471	1475	1479	1483	1487	1491	1495	1499	1503	1507	1511	1515	1519	1523	1527	1531	1535	1539	1543	1547	1551	1555	1559	1563	1567	1571	1575	1579	1583	1587	1591	1595	1599	1603	1607	1611	1615	1619	1623	1627	1631	1635	1639	1643	1647	1651	1655	1659	1663	1667	1671	1675	1679	1683	1687	1691	1695	1699	1703	1707	1711	1715	1719	1723	1727	1731	1735	1739	1743	1747	1751	1755	1759	1763	1767	1771	1775	1779	1783	1787	1791	1795	1799	1803	1807	1811	1815	1819	1823	1827	1831	1835	1839	1843	1847	1851	1855	1859	1863	1867	1871	1875	1879	1883	1887	1891	1895	1899	1903	1907	1911	1915	1919	1923	1927	1931	1935	1939	1943	1947	1951	1955	1959	1963	1967	1971	1975	1979	1983	1987	1991	1995	1999	2003	2007	2011	2015	2019	2023	2027	2031	2035	2039	2043	2047	2051	2055	2059	2063	2067	2071	2075	2079	2083	2087	2091	2095	2099	2103	2107	2111	2115	2119	2123	2127	2131	2135	2139	2143	2147	2151	2155	2159	2163	2167	2171	2175	2179	2183	2187	2191	2195	2199	2203	2207	2211	2215	2219	2223	2227	2231	2235	2239	2243	2247	2251	2255	2259	2263	2267	2271	2275	2279	2283	2287	2291	2295	2299	2303	2307	2311	2315	2319	2323	2327	2331	2335	2339	2343	2347	2351	2355	2359	2363	2367	2371	2375	2379	2383	2387	2391	2395	2399	2403	2407	2411	2415	2419	2423	2427	2431	2435	2439	2443	2447	2451	2455	2459	2463	2467	2471	2475	2479	2483	2487	2491	2495	2499	2503	2507	2511	2515	2519	2523	2527	2531	2535	2539	2543	2547	2551	2555	2559	2563	2567	2571	2575	2579	2583	2587	2591	2595	2599	2603	2607	2611	2615	2619	2623	2627	2631	2635	2639	2643	2647	2651	2655	2659	2663	2667	2671	2675	2679	2683	2687	2691	2695	2699	2703	2707	2711	2715	2719	2723	2727	2731	2735	2739	2743	2747	2751	2755	2759	2763	2767	2771	2775	2779	2783	2787	2791	2795	2799	2803	2807	2811	2815	2819	2823	2827	2831	2835	2839	2843	2847	2851	2855	2859	2863	2867	2871	2875	2879	2883	2887	2891	2895	2899	2903	2907	2911	2915	2919	2923	2927	2931	2935	2939	2943	2947	2951	2955	2959	2963	2967	2971	2975	2979	2983	2987	2991	2995	2999	3003	3007	3011	3015	3019	3023	3027	3031	3035	3039	3043	3047	3051	3055	3059	3063	3067	3071	3075	3079	3083	3087	3091	3095	3099	3103	3107	3111	3115	3119	3123	3127	3131	3135	3139	3143	3147	3151	3155	3159	3163	3167	3171	3175	3179	3183	3187	3191	3195	3199	3203	3207	3211	3215	3219	3223	3227	3231	3235	3239	3243	3247	3251	3255	3259	3263	3267	3271	3275	3279	3283	3287	3291	3295	3299	3303	3307	3311	3315	3319	3323	3327	3331	3335	3339	3343	3347	3351	3355	3359	3363	3367	3371	3375	3379	3383	3387	3391	3395	3399	3403	3407	3411	3415	3419	3423	3427	3431	3435	3439	3443	3447	3451	3455	3459	3463	3467	3471	3475	3479	3483	3487	3491	3495	3499	3503	3507	3511	3515	3519	3523	3527	3531	3535	3539	3543	3547	3551	3555	3559	3563	3567	3571	3575	3579	3583	3587	3591	3595	3599	3603	3607	3611	3615	3619	3623	3627	3631	3635	3639	3643	3647	3651	3655	3659	3663	3667	3671	3675	3679	3683	3687	3691	3695	3699	3703	3707	3711	3715	3719	3723	3727	3731	3735	3739	3743	3747	3751	3755	3759	3763	3767	3771	3775	3779	3783	3787	3791	3795	3799	3803	3807	3811	3815	3819	3823	3827	3831	3835	3839	3843	3847	3851	3855	3859	3863	3867	3871	3875	3879	3883	3887	3891	3895	3899	3903	3907	3911	3915	3919	3923	3927	3931	3935	3939	3943	3947	3951	3955	3959	3963	3967	3971	3975	3979	3983	3987	3991	3995	3999	4003	4007	4011	4015	4019	4023	4027	4031	4035	4039	4043	4047	4051	4055	4059	4063	4067	4071	4075	4079	4083	4087	4091	4095	4099	4103	4107	4111	4115	4119	4123	4127	4131	4135	4139	4143	4147	4151	4155	4159	4163	4167	4171	4175	4179	4183	4187	4191	4195	4199	4203	4207	4211	4215	4219	4223	4227	4231	4235	4239	4243	4247	4251	4255	4259	4263	4267	4271	4275	4279	4283	4287	4291	4295	4299	4303	4307	4311	4315	4319	4323	4327	4331	4335	4339	4343	4347	4351	4355	4359	4363	4367	4371	4375	4379	4383	4387	4391	4395	4399	4403	4407	4411	4415	4419	4423	4427	4431	4435	4439	4443	4447	4451	4455	4459	4463	4467	4471	4475	4479	4483	4487	4491	4495	4499	4503	4507	4511	4515	4519	4523	4527	4531	4535	4539	4543	4547	4551	4555	4559	4563	4567	4571	4575	4579	4583	4587	4591	4595	4599	4603	4607	4611	4615	4619	4623	4627	4631	4635	4639	4643	4647	4651	4655	4659	4663	4667	4671	4675	4679	4683	4687	4691	4695	4699	4703	4707	4711	4715	4719	4723	4727	4731	4735	4739	4743	4747	4751	4755	4759	4763	4767	4771	4775	4779	4783	4787	4791	4795	4799	4803	4807	4811	4815	4819	4823	4827	4831	4835	4839	4843	4847	4851	4855	4859	4863	4867	4871	4875	4879	4883	4887	4891	4895	4899	4903	4907	4911	4915	4919	4923	4927	4931	4935	4939	4943	4947	4951	4955	4959	4963	4967	4971	4975	4979	4983	4987	4991	4995	4999	5003	5007	5011	5015	5019	5023	5027	5031	5035	5039	5043	5047	5051	5055	5059	5063	5067	5071	5075	5079	5083	5087	5091	5095	5099	5103	5107	5111	5115	5119	5123	5127	5131	5135	5139	5143	5147	5151	5155	5159	5163	5167	5171	5175	5179	5183	5187	5191	5195	5199	5203	5207	5211	5215	5219	5223	5227	5231	5235	5239	5243	5247	5251	5255	5259	5263	5267	5271	5275	5279	5283	5287	5291	5295	5299	5303	5307	5311	5315	5319	5323	53

EXPANDED COOLING DATA — VSZ130301A* / AR*F30301**

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	27.4	28.4	31.1	-	26.8	27.8	30.4	-	26.1	27.1	29.7	-	25.5	26.4	29.0	-	24.2	25.1	27.5	-	22.4	23.3	25.5	-
	S/T	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.87	0.72	0.50	-	0.87	0.73	0.51	-
	ΔT	16	14	11	-	17	14	11	-	17	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-
	kW	1.98	2.02	2.08	-	2.13	2.17	2.24	-	2.25	2.30	2.37	-	2.37	2.42	2.49	-	2.46	2.52	2.60	-	2.55	2.60	2.68	-
	Amps	7.8	7.9	8.2	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.2	-	10.2	10.5	10.8	-	10.8	11.1	11.4	-
927	Hi PR	229	246	260	-	257	276	292	-	292	314	332	-	333	358	378	-	374	403	425	-	413	445	470	-
	Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-
	MBh	27.0	28.0	30.7	-	26.4	27.4	30.0	-	25.8	26.7	29.3	-	25.1	26.1	28.5	-	23.9	24.7	27.1	-	22.1	22.9	25.1	-
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
	kW	1.97	2.01	2.07	-	2.12	2.16	2.22	-	2.24	2.29	2.36	-	2.35	2.40	2.48	-	2.45	2.50	2.58	-	2.53	2.59	2.67	-
	Amps	7.7	7.9	8.1	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.1	-	10.2	10.4	10.7	-	10.7	11.0	11.3	-
	Hi PR	227	245	258	-	255	274	290	-	290	312	330	-	330	355	375	-	372	400	422	-	411	442	467	-
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-
		MBh	25.7	26.6	29.1	-	25.1	26.0	28.5	-	24.5	25.4	27.8	-	23.9	24.7	27.1	-	22.7	23.5	25.8	-	21.0	21.8	23.9
S/T		0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-
ΔT		18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
kW		1.94	1.98	2.04	-	2.08	2.13	2.19	-	2.21	2.25	2.32	-	2.32	2.37	2.44	-	2.41	2.46	2.54	-	2.49	2.54	2.62	-
Amps		7.6	7.8	8.0	-	8.2	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.6	9.9	-	10.0	10.2	10.5	-	10.5	10.8	11.1	-
	Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	348	368	-	364	392	414	-	402	433	457	-
	Lo PR	104	111	121	-	110	117	128	-	114	121	133	-	120	128	139	-	126	134	146	-	130	138	151	-

1173	MBh	27.89	28.71	31.08	33.36	27.24	28.05	30.36	32.58	26.59	27.38	29.64	31.81	25.94	26.71	28.91	31.03	24.65	25.38	27.47	29.48	22.83	23.51	25.44	27.31	22.83	23.51	25.44	27.31	22.83	23.51	25.44	27.31	22.83	23.51	25.44	27.31
	S/T	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43
	ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	15	10	19	17	14	10	18	16	13	9	18	16	13	9	18	16	13	9	18	16	13	9
	kW	2.00	2.04	2.10	2.16	2.14	2.19	2.25	2.33	2.27	2.32	2.39	2.47	2.39	2.44	2.51	2.59	2.48	2.54	2.62	2.70	2.57	2.62	2.71	2.79	2.57	2.62	2.71	2.79	2.57	2.62	2.71	2.79	2.57	2.62	2.71	2.79
	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.9	9.2	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.6	10.3	10.5	10.9	11.3	10.9	11.2	11.5	11.9	10.9	11.2	11.5	11.9	10.9	11.2	11.5	11.9	10.9	11.2	11.5	11.9
1050	MBh	27.5	28.3	30.6	32.9	26.8	27.6	29.9	32.1	26.2	27.0	29.2	31.3	25.6	26.3	28.5	30.6	24.3	25.0	27.1	29.0	22.5	23.2	25.1	26.9	22.5	23.2	25.1	26.9	22.5	23.2	25.1	26.9	22.5	23.2	25.1	26.9
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	20	18	15	10	20	19	15	10	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10	19	17	14	10	19	17	14	10	19	17	14	10
	kW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78	2.55	2.61	2.69	2.78	2.55	2.61	2.69	2.78	2.55	2.61	2.69	2.78
	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.8	9.1	9.1	9.3	9.6	9.9	9.6	9.9	10.2	10.6	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9	10.8	11.1	11.4	11.9	10.8	11.1	11.4	11.9	10.8	11.1	11.4	11.9
927	MBh	26.1	26.9	29.1	31.2	25.5	26.3	28.4	30.5	24.9	25.6	27.7	29.8	24.3	25.0	27.1	29.0	23.1	23.8	25.7	27.6	21.4	22.0	23.8	25.6	21.4	22.0	23.8	25.6	21.4	22.0	23.8	25.6	21.4	22.0	23.8	25.6
	S/T	0.79	0.71	0.54	0.35	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.41	0.91	0.81	0.62	0.40	0.91	0.81	0.62	0.40	0.91	0.81	0.62	0.40	0.91	0.81	0.62	0.40
	ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	19	18	15	10	19	18	15	10	19	18	15	10
	kW	1.96	2.00	2.06	2.12	2.10	2.14	2.21	2.28	2.22	2.27	2.34	2.42	2.34	2.38	2.46	2.54	2.43	2.48	2.56	2.64	2.51	2.56	2.65	2.73	2.51	2.56	2.65	2.73	2.51	2.56	2.65	2.73	2.51	2.56	2.65	2.73
	Amps	7.6	7.8	8.1	8.3	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.5	9.7	10.0	10.4	10.1	10.3	10.6	11.0	10.6	10.9	11.2	11.6	10.6	10.9	11.2	11.6	10.6	10.9	11.2	11.6	10.6	10.9	11.2	11.6

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACAA (TVA) Rating Conditions

kW = Total system power
Amps = Outdoor unit amps (compressor + fan)

EXPANDED COOLING DATA — VSZ130301A* / AR*F30301** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	28.38	29.00	30.99	33.13	27.72	28.33	30.27	32.36	27.06	27.66	29.55	31.59	26.40	26.98	28.83	30.81	25.08	25.63	27.38	29.27	23.24	23.74	25.37	27.12
	S/T	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.59	1.00	1.00	0.82	0.62	1.00	1.00	0.83	0.62
	ΔT	21	20	18	14	21	20	18	14	21	20	18	14	21	21	18	14	20	20	18	14	18	19	17	13
	kW	2.01	2.05	2.12	2.18	2.16	2.20	2.27	2.34	2.29	2.34	2.41	2.49	2.41	2.46	2.53	2.62	2.50	2.56	2.64	2.72	2.59	2.64	2.73	2.82
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.0	11.3	11.6	12.0
	Hi PR	234	251	265	277	262	282	298	311	298	321	339	353	339	365	386	402	382	411	434	453	422	454	479	500
927	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169
	MBh	28.0	28.6	30.5	32.6	27.3	27.9	29.8	31.9	26.7	27.2	29.1	31.1	26.0	26.6	28.4	30.4	24.7	25.3	27.0	28.8	22.9	23.4	25.0	26.7
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59
	ΔT	22	21	19	15	22	22	19	15	23	22	19	15	23	22	19	15	22	21	19	15	20	20	17	14
	kW	2.00	2.04	2.10	2.17	2.15	2.19	2.26	2.33	2.28	2.33	2.40	2.47	2.39	2.44	2.52	2.60	2.49	2.54	2.62	2.71	2.57	2.63	2.71	2.80
	Amps	7.8	8.0	8.3	8.6	8.4	8.6	8.9	9.2	9.1	9.3	9.6	10.0	9.7	10.0	10.3	10.7	10.3	10.6	10.9	11.3	10.9	11.2	11.5	12.0
1173	Hi PR	232	250	264	275	260	280	296	308	296	318	336	351	337	363	383	399	379	408	431	449	419	451	476	497
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167
	MBh	26.6	27.1	29.0	31.0	25.9	26.5	28.3	30.3	25.3	25.9	27.7	29.6	24.7	25.3	27.0	28.8	23.5	24.0	25.6	27.4	21.7	22.2	23.7	25.4
	S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.76	0.56	1.00	0.94	0.76	0.57
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	23	22	19	15	22	21	18	14
	kW	1.97	2.01	2.07	2.13	2.12	2.16	2.22	2.29	2.24	2.29	2.36	2.43	2.35	2.40	2.48	2.56	2.45	2.50	2.58	2.66	2.53	2.59	2.67	2.76
85	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.4	10.7	11.1	10.7	11.0	11.3	11.8
	Hi PR	227	245	258	269	255	274	290	302	290	312	330	344	330	355	375	391	372	400	422	440	411	442	467	487
	Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164
	MBh	28.88	29.44	30.83	32.89	28.21	28.76	30.12	32.13	27.54	28.07	29.40	31.36	26.87	27.39	28.68	30.60	25.52	26.02	27.25	29.07	23.64	24.10	25.24	26.93
	S/T	0.99	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	0.99	0.81
	ΔT	22	22	21	18	22	22	21	18	22	22	21	18	21	21	21	18	20	20	21	18	19	19	20	17
1173	kW	2.03	2.07	2.13	2.20	2.18	2.22	2.29	2.36	2.31	2.36	2.43	2.51	2.42	2.48	2.55	2.64	2.52	2.58	2.66	2.75	2.61	2.66	2.75	2.84
	Amps	8.0	8.1	8.4	8.7	8.6	8.8	9.0	9.4	9.3	9.5	9.8	10.1	9.9	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.4	11.7	12.2
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	406	386	415	438	457	426	459	484	505
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	28.5	29.0	30.4	32.4	27.8	28.3	29.7	31.7	27.1	27.7	29.0	30.9	26.5	27.0	28.3	30.1	25.1	25.6	26.8	28.6	23.3	23.7	24.9	26.5
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
1050	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	23	24	22	19	22	22	22	19	20	21	21	18
	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.30	2.34	2.42	2.49	2.41	2.46	2.54	2.62	2.51	2.56	2.64	2.73	2.59	2.65	2.74	2.82
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.1	10.4	10.7	10.4	10.7	11.0	11.4	11.0	11.3	11.6	12.1
	Hi PR	234	252	266	278	263	283	299	311	299	322	340	354	340	366	387	403	383	412	435	454	423	455	481	502
	Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169
	MBh	27.0	27.6	28.9	30.8	26.4	26.9	28.2	30.1	25.8	26.3	27.5	29.4	25.1	25.6	26.8	28.6	23.9	24.4	25.5	27.2	22.1	22.6	23.6	25.2
927	S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
	ΔT	24	24	23	20	25	24	23	20	25	24	23	20	25	25	23	20	24	24	23	20	22	22	21	18
	kW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78
	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.8	9.1	9.1	9.3	9.6	9.9	9.6	9.9	10.2	10.6	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9
	Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	395	375	404	426	445	415	446	471	491
	Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

EXPANDED COOLING DATA — VSZ130361B* / AR*F364216**

		OUTDOOR AMBIENT TEMPERATURE																																				
		65°F						75°F						85°F						95°F						105°F						115°F						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	MBh	34.3	35.5	38.9	-	32.7	33.9	37.1	-	31.9	33.1	36.2	-	30.3	31.4	34.4	-	28.1	29.1	31.9	-	27.3	28.3	31.0	-	25.2	26.1	28.6	-	23.3	24.3	27.0	-	20.4	21.4	24.1	-	
	S/T	0.75	0.63	0.44	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.89	0.75	0.54	-	0.92	0.78	0.56	-	0.95	0.81	0.59	-	0.98	0.84	0.62	-	1.01	0.87	0.65	-	
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	
	1350	KW	2.49	2.54	2.62	-	2.84	2.91	3.00	-	2.99	3.06	3.16	-	3.12	3.18	3.29	-	3.22	3.30	3.40	-	3.20	3.27	3.38	-	3.12	3.19	3.29	-	3.00	3.07	3.18	-	2.88	2.95	3.06	-
	Amps	8.6	8.8	9.1	-	10.1	10.3	10.7	-	10.8	11.0	11.4	-	11.5	11.7	12.1	-	12.1	12.4	12.8	-	12.0	12.3	12.7	-	12.0	12.3	12.7	-	11.7	12.0	12.4	-	11.4	11.7	12.1	-	
	Hi Pr	238	256	270	-	304	327	345	-	346	372	393	-	389	419	442	-	430	463	488	-	426	458	484	-	413	444	469	-	400	431	456	-	387	418	443	-	
	Lo Pr	107	114	124	-	118	125	137	-	124	131	144	-	130	138	150	-	124	131	143	-	119	126	138	-	114	121	133	-	109	116	126	-	104	111	121	-	
	MBh	33.3	34.5	37.8	-	31.7	32.9	36.1	-	31.0	32.1	35.2	-	29.4	30.5	33.4	-	27.3	28.3	31.0	-	25.2	26.1	28.6	-	23.3	24.3	27.0	-	20.4	21.4	24.1	-	17.5	18.5	21.2	-	
	S/T	0.72	0.60	0.42	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.50	-	0.88	0.74	0.52	-	0.91	0.77	0.55	-	0.94	0.80	0.58	-	0.97	0.83	0.61	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	
	1200	KW	2.47	2.52	2.60	-	2.82	2.88	2.97	-	2.97	3.03	3.13	-	3.09	3.16	3.26	-	3.02	3.09	3.19	-	2.90	2.97	3.08	-	2.80	2.87	2.97	-	2.68	2.75	2.86	-	2.56	2.63	2.74	-
	Amps	8.5	8.7	9.0	-	10.0	10.2	10.6	-	10.7	10.9	11.3	-	11.3	11.6	12.0	-	11.2	11.5	11.9	-	11.0	11.3	11.7	-	10.7	11.0	11.4	-	10.4	10.7	11.1	-	10.1	10.4	10.8	-	
	Hi Pr	236	253	268	-	301	323	342	-	342	368	389	-	385	414	438	-	372	405	430	-	359	391	416	-	346	378	403	-	333	364	389	-	320	351	376	-	
	Lo Pr	106	113	123	-	116	124	135	-	122	130	142	-	118	126	138	-	113	120	131	-	108	115	126	-	103	110	121	-	98	105	116	-	93	100	111	-	
75	MBh	30.7	31.9	34.9	-	29.3	30.4	33.3	-	28.6	29.6	32.5	-	27.2	28.2	30.8	-	25.2	26.1	28.6	-	23.3	24.3	27.0	-	20.4	21.4	24.1	-	17.5	18.5	21.2	-	14.6	15.6	18.3	-	
	S/T	0.69	0.58	0.40	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.50	-	0.88	0.74	0.52	-	0.91	0.77	0.55	-	0.94	0.80	0.58	-	
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	
	1350	KW	2.41	2.46	2.54	-	2.75	2.81	2.90	-	2.89	2.96	3.05	-	3.01	3.08	3.18	-	2.88	2.95	3.05	-	2.76	2.83	2.94	-	2.64	2.71	2.82	-	2.52	2.59	2.70	-	2.40	2.47	2.58	-
	Amps	8.3	8.5	8.8	-	9.7	10.0	10.3	-	10.4	10.6	11.0	-	11.0	11.3	11.7	-	10.7	11.0	11.4	-	10.4	10.7	11.1	-	10.1	10.4	10.8	-	9.8	10.1	10.5	-	9.5	9.8	10.2	-	
	Hi Pr	228	246	260	-	292	314	331	-	332	357	377	-	374	402	425	-	361	393	418	-	348	379	404	-	335	366	391	-	322	353	378	-	309	340	365	-	
	Lo Pr	103	109	120	-	113	120	131	-	119	126	138	-	114	121	133	-	109	116	126	-	104	111	121	-	99	106	117	-	94	101	112	-	89	96	107	-	
	MBh	33.9	34.9	37.7	40.5	32.3	33.2	36.0	38.6	31.5	32.4	35.1	37.7	29.9	30.8	33.3	35.8	27.7	28.5	30.9	33.2	25.2	26.0	28.3	30.6	23.3	24.1	26.8	29.1	25.6	26.3	28.5	30.9	23.3	24.1	26.8	29.1	
	S/T	0.82	0.73	0.55	0.36	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.99	0.89	0.68	0.44	1.00	0.90	0.69	0.45	
	ΔT	21	20	16	11	21	20	16	11	22	20	16	11	22	20	16	11	23	21	18	15	24	22	19	16	25	23	19	16	26	24	21	18	27	25	22	19	
	1200	KW	2.49	2.54	2.62	2.70	2.68	2.74	2.82	2.91	2.85	2.91	3.00	3.10	3.12	3.19	3.29	3.40	3.22	3.30	3.40	3.22	3.30	3.40	3.52	3.22	3.30	3.40	3.52	3.22	3.30	3.40	3.52	3.22	3.30	3.40	3.52	
	Amps	8.6	8.8	9.1	9.4	10.1	10.3	10.7	11.1	10.8	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3	
	Hi Pr	238	256	270	282	304	327	345	360	346	372	393	410	389	419	442	461	430	463	488	510	426	458	484	510	413	444	469	510	400	431	456	510	387	418	443	510	
	Lo Pr	107	114	124	133	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	119	126	138	150	108	115	126	150	98	105	116	150	93	100	111	150	
75	MBh	31.3	32.2	34.8	37.4	29.8	30.7	33.2	35.6	29.1	29.9	32.4	34.8	27.6	28.4	30.8	33.0	25.6	26.3	28.5	30.9	23.3	24.1	26.8	29.1	25.6	26.3	28.5	30.9	23.3	24.1	26.8	29.1	20.4	21.4	24.1	27.0	
	S/T	0.79	0.70	0.53	0.34	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.99	0.89	0.68	0.44	1.00	0.90	0.69	0.45	
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	23	21	18	15	24	22	19	16	25	23	19	16	26	24	21	18	27	25	22	19	
	1350	KW	2.43	2.48	2.56	2.64	2.61	2.67	2.75	2.84	2.78	2.84	2.93	3.02	3.04	3.11	3.21	3.30	3.21	3.30	3.40	3.21	3.30	3.40	3.52	3.21	3.30	3.40	3.52	3.21	3.30	3.40	3.52	3.21	3.30	3.40	3.52	
	Amps	8.4	8.6	8.9	9.2	9.8	10.0	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.4	11.8	12.2	11.8	12.1	12.5	12.9	11.7	12.0	12.4	12.8	11.7	12.0	12.4	12.8	11.7	12.0	12.4	12.8	11.7	12.0	12.4	12.8	
	Hi Pr	231	248	262	274	295	317	335	349	335	361	381	398	377	406	429	447	417	449	474	494	426	458	484	510	413	444	469	510	400	431	456	510	387	418	443	510	
	Lo Pr	104	111	121	129	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161	119	126	138	150	108	115	126	150	98	105	116	150	93	100	111	150	
	MBh	34.88	35.91	38.87	41.72	33.26	34.24	37.06	39.78	32.45	33.41	36.16	38.81	30.82	31.74	34.35	36.87	28.55	29.40	31.82	34.15	25.2	26.1	28.6	30.9	23.3	24.1	26.8	29.1	25.6	26.3	28.5	30.9	23.3	24.1	26.8	29.1	
	S/T	0.86	0.77	0.58	0.37	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.99	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.99</								

EXPANDED COOLING DATA — VSZ130361B* / AR*F364216** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1350	MBh	35.50	36.27	38.75	41.43	34.67	35.43	37.85	40.46	33.85	34.59	36.95	39.50	33.02	33.74	36.05	38.54	31.37	32.06	34.25	36.61	29.06	29.69	31.72	33.91	
		S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62	
		ΔT	23	22	19	15	24	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	18	14	
		KW	2.53	2.58	2.66	2.75	2.72	2.78	2.87	2.96	2.89	2.95	3.05	3.15	3.04	3.11	3.21	3.32	3.17	3.24	3.35	3.46	3.28	3.35	3.46	3.58	
		Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.2	11.6	12.0	11.7	12.0	12.3	12.8	12.4	12.7	13.1	13.6	
		Hi Pr	243	261	276	288	272	293	310	323	310	333	352	367	353	380	401	418	397	427	451	470	439	472	498	520	
80	1200	Lo Pr	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	
		MBh	34.5	35.2	37.6	40.2	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.4	30.5	31.1	33.3	35.5	28.2	28.8	30.8	32.9	
		S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	22	21	19	15	
		KW	2.51	2.56	2.64	2.73	2.70	2.76	2.85	2.94	2.87	2.93	3.02	3.12	3.02	3.08	3.18	3.29	3.14	3.21	3.32	3.43	3.25	3.32	3.43	3.55	
		Amps	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.1	11.5	11.9	11.6	11.8	12.2	12.7	12.2	12.5	13.0	13.4	
	1050	Hi Pr	240	259	273	285	270	290	306	320	307	330	349	364	349	376	397	414	393	423	447	466	434	467	493	515	
		Lo Pr	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
		MBh	31.8	32.5	34.7	37.1	31.1	31.7	33.9	36.3	30.3	31.0	33.1	35.4	29.6	30.2	32.3	34.5	28.1	28.7	30.7	32.8	26.0	26.6	28.4	30.4	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	20	16	24	24	23	20	16	23	22	19	15
		KW	2.45	2.50	2.58	2.66	2.64	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.94	3.01	3.10	3.21	3.06	3.13	3.23	3.34	3.17	3.24	3.35	3.46	
	1050	Amps	8.5	8.7	8.9	9.3	9.1	9.3	9.6	10.0	9.9	10.1	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.5	11.9	12.3	11.9	12.2	12.6	13.1	
		Hi Pr	233	251	265	276	262	282	297	310	298	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499	
		Lo Pr	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	
		MBh	36.12	36.82	38.56	41.14	35.28	35.96	37.66	40.18	34.44	35.11	36.77	39.22	33.60	34.25	35.87	38.27	31.92	32.54	34.08	36.35	29.57	30.14	31.57	33.68	
		S/T	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	
		ΔT	24	24	23	19	24	24	23	20	23	24	23	20	23	23	23	20	22	22	23	20	20	21	21	18	

EXPANDED COOLING DATA — VSZ130421A* / AR*F364216**

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	39.7	41.1	45.1	-	38.8	40.2	44.0	-	37.8	39.2	43.0	-	36.9	38.3	41.9	-	35.1	36.4	39.8	-	32.5	33.7	36.9	-	35.1	36.4	39.8	-	32.5	33.7	36.9	-	35.1	36.4	39.8	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-	18	16	12	-
	kW	2.89	2.95	3.04	-	3.10	3.17	3.27	-	3.29	3.36	3.47	-	3.46	3.54	3.65	-	3.60	3.68	3.80	-	3.73	3.81	3.93	-	3.60	3.68	3.80	-	3.73	3.81	3.93	-	3.60	3.68	3.80	-
	Amps	10.3	10.5	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	13.0	13.3	13.8	-	13.8	14.2	14.7	-	14.7	15.1	15.6	-	13.8	14.2	14.7	-	14.7	15.1	15.6	-	13.8	14.2	14.7	-
	Hi PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-	356	383	404	-	393	423	447	-	356	383	404	-
	Lo PR	107	114	124	-	113	120	131	-	118	125	137	-	124	131	144	-	130	138	150	-	134	143	156	-	130	138	150	-	134	143	156	-	130	138	150	-
	MBh	38.5	39.9	43.8	-	37.6	39.0	42.7	-	36.7	38.1	41.7	-	35.8	37.1	40.7	-	34.1	35.3	38.7	-	31.5	32.7	35.8	-	34.1	35.3	38.7	-	31.5	32.7	35.8	-	34.1	35.3	38.7	-
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	0.81	0.68	0.47	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	19	16	12	-	17	15	11	-	19	16	12	-
	kW	2.87	2.93	3.02	-	3.08	3.14	3.24	-	3.27	3.34	3.44	-	3.43	3.51	3.62	-	3.37	3.45	3.57	-	3.30	3.38	3.50	-	3.37	3.45	3.57	-	3.30	3.38	3.50	-	3.37	3.45	3.57	-
75	Amps	10.2	10.4	10.8	-	11.0	11.3	11.7	-	12.0	12.3	12.7	-	12.9	13.2	13.6	-	13.7	14.1	14.5	-	14.6	14.9	15.4	-	13.7	14.1	14.5	-	14.6	14.9	15.4	-	13.7	14.1	14.5	-
	Hi PR	215	232	245	-	242	260	275	-	275	296	312	-	313	337	356	-	352	379	400	-	389	419	442	-	352	379	400	-	389	419	442	-	352	379	400	-
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	128	136	149	-	133	141	154	-	128	136	149	-
	MBh	35.6	36.9	40.4	-	34.7	36.0	39.4	-	33.9	35.1	38.5	-	33.1	34.3	37.6	-	31.4	32.6	35.7	-	29.1	30.2	33.1	-	31.4	32.6	35.7	-	29.1	30.2	33.1	-	31.4	32.6	35.7	-
	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.78	0.66	0.45	-	0.78	0.65	0.45	-	0.78	0.66	0.45	-	0.78	0.66	0.45	-
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	13	-	18	15	12	-	19	16	13	-	18	15	12	-	19	16	13	-
	kW	2.80	2.86	2.94	-	3.01	3.07	3.17	-	3.19	3.26	3.36	-	3.35	3.42	3.53	-	3.49	3.56	3.68	-	3.61	3.68	3.80	-	3.49	3.56	3.68	-	3.61	3.68	3.80	-	3.49	3.56	3.68	-
	Amps	9.9	10.1	10.5	-	10.7	11.0	11.3	-	11.7	12.0	12.4	-	12.5	12.8	13.2	-	13.3	13.7	14.1	-	14.1	14.5	15.0	-	13.3	13.7	14.1	-	14.1	14.5	15.0	-	13.3	13.7	14.1	-
	Hi PR	209	225	237	-	234	252	266	-	267	287	303	-	304	327	345	-	342	368	388	-	377	406	429	-	342	368	388	-	377	406	429	-	342	368	388	-
	Lo PR	103	109	120	-	109	116	126	-	113	120	131	-	119	126	138	-	124	132	144	-	129	137	149	-	124	132	144	-	129	137	149	-	124	132	144	-
	MBh	40.36	41.55	44.98	48.27	39.42	40.59	43.93	47.15	38.48	39.62	42.89	46.03	37.54	38.65	41.84	44.91	35.67	36.72	39.75	42.66	33.04	34.02	36.82	39.52	35.67	36.72	39.75	42.66	33.04	34.02	36.82	39.52	35.67	36.72	39.75	42.66
75	S/T	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	19	18	15	10	21	20	16	11	19	18	15	10	21	20	16	11
	kW	2.91	2.97	3.06	3.16	3.13	3.19	3.29	3.40	3.32	3.39	3.50	3.61	3.49	3.57	3.68	3.80	3.63	3.71	3.83	3.96	3.76	3.84	3.97	4.10	3.63	3.71	3.83	3.96	3.76	3.84	3.97	4.10	3.63	3.71	3.83	3.96
	Amps	10.4	10.6	11.0	11.4	11.2	11.5	11.9	12.4	12.2	12.5	13.0	13.5	13.1	13.4	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.4	14.0	14.3	14.8	15.4
	Hi PR	220	236	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471	359	387	408	426	397	427	451	471	359	387	408	426
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	131	139	152	162	135	144	157	167	131	139	152	162
	MBh	39.2	40.3	43.7	46.9	38.3	39.4	42.7	45.8	37.4	38.5	41.6	44.7	36.5	37.5	40.6	43.6	34.6	35.7	38.6	41.4	32.1	33.0	35.7	38.4	34.6	35.7	38.6	41.4	32.1	33.0	35.7	38.4	34.6	35.7	38.6	41.4
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	0.92	0.82	0.62	0.40
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11	22	20	16	11	20	19	15	11	22	20	16	11
	kW	2.89	2.95	3.04	3.13	3.10	3.17	3.27	3.37	3.29	3.36	3.47	3.58	3.46	3.54	3.65	3.77	3.60	3.68	3.80	3.93	3.73	3.81	3.93	4.06	3.60	3.68	3.80	3.93	3.73	3.81	3.93	4.06	3.60	3.68	3.80	3.93
	Amps	10.3	10.5	10.9	11.3	11.1	11.4	11.8	12.2	12.1	12.4	12.8	13.3	13.0	13.3	13.8	14.3	13.8	14.2	14.7	15.3	14.7	15.1	15.6	16.2	13.8	14.2	14.7	15.3	14.7	15.1	15.6	16.2	13.8	14.2	14.7	15.3
	Hi PR	218	234	247	258	244	263	277	289	278	299	316	329	316	340	359	375	356	383	404	422	393	423	447	466	356	383	404	422	393	423	447	466	356	383	404	422
	Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	130	138	150	160	134	143	156	166	130	138	150	160
75	MBh	36.2	37.2	40.3	43.3	35.3	36.4	39.4	42.3	34.5	35.5	38.4	41.2	33.6	34.64	37.5	40.2	32.0	32.9	35.6	38.2	29.6	30.5	33.0	35.4	33.6	34.64	37.5	40.2	32.0	32.9	35.6	38.2	29.6	30.5	33.0	35.4
	S/T	0.78	0.69	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39	0.88											

EXPANDED COOLING DATA — VSZ130421A* / AR*F364216** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	
80	MBh	41.08	41.97	44.84	47.94	40.12	41.00	43.80	46.82	39.17	40.02	42.76	45.71	38.21	39.05	41.72	44.59	36.30	37.09	39.63	42.36	33.63	34.36	36.71	39.24	30.30	31.03	33.38	36.11	39.24	32.36	33.09	35.44	38.57	42.60	36.71	39.24
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.61	0.99	0.99	0.81	0.60	0.39	0.39	0.61	0.81	1.00	0.81	0.61	
	ΔT	23	22	19	15	23	22	19	16	24	22	19	16	23	23	20	16	22	22	19	15	20	21	18	14	20	20	18	15	12	10	10	12	15	18	14	
	kW	2.93	3.00	3.09	3.18	3.15	3.22	3.32	3.43	3.35	3.42	3.53	3.64	3.52	3.59	3.71	3.83	3.66	3.74	3.87	3.99	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13
	Amps	10.4	10.7	11.1	11.5	11.3	11.6	12.0	12.5	12.3	12.7	13.1	13.6	13.2	13.6	14.0	14.6	14.1	14.5	15.0	15.6	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5
	Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	430	461	485	509	533	557	581	605	629	653	677	701
	Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	140	149	161	173	185	197	209	221	233	245	257	269
	MBh	39.9	40.8	43.5	46.5	39.0	39.8	42.5	45.5	38.0	38.9	41.5	44.4	37.1	37.9	40.5	43.3	35.2	36.0	38.5	41.1	32.6	33.4	35.6	38.1	30.3	31.0	33.3	36.1	39.2	32.36	33.09	35.44	38.57	42.60	36.71	39.24
	S/T	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58	0.99	0.99	0.81	0.60	0.39	0.39	0.61	0.81	1.00	0.81	0.61	
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15	20	21	18	14	20	20	18	15	12	10	10	12	15	18	14	
	kW	2.91	2.97	3.06	3.16	3.13	3.19	3.29	3.40	3.32	3.39	3.50	3.61	3.49	3.57	3.68	3.80	3.63	3.71	3.83	3.96	3.76	3.84	3.97	4.10	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13
	Amps	10.4	10.6	11.0	11.4	11.2	11.5	11.9	12.4	12.2	12.5	13.0	13.5	13.1	13.4	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.4	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5
	Hi PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471	430	461	485	509	533	557	581	605	629	653	677	701
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	140	149	161	173	185	197	209	221	233	245	257	269
85	MBh	36.8	37.6	40.2	43.0	36.0	36.7	39.3	42.0	35.1	35.9	38.3	41.0	34.2	35.0	37.4	40.0	32.5	33.2	35.5	38.0	30.1	30.8	32.9	35.2	30.3	31.0	33.3	36.1	39.2	32.36	33.09	35.44	38.57	42.60	36.71	39.24
	S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56	0.99	0.99	0.81	0.60	0.39	0.39	0.61	0.81	1.00	0.81	0.61	
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	25	24	21	16	23	22	19	15	20	20	18	15	12	10	10	12	15	18	14	
	kW	2.84	2.90	2.99	3.08	3.06	3.12	3.22	3.32	3.24	3.31	3.41	3.52	3.41	3.48	3.59	3.71	3.55	3.62	3.74	3.86	3.67	3.75	3.87	3.99	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13
	Amps	10.1	10.3	10.7	11.1	10.9	11.2	11.6	12.0	11.9	12.2	12.6	13.1	12.7	13.1	13.5	14.0	13.6	13.9	14.4	15.0	14.4	14.8	15.3	15.9	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5
	Hi PR	213	229	242	253	239	257	272	284	272	293	309	322	310	333	352	367	349	375	396	413	385	414	438	456	430	461	485	509	533	557	581	605	629	653	677	701
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	140	149	161	173	185	197	209	221	233	245	257	269
	MBh	41.79	42.60	44.62	47.60	40.82	41.61	43.58	46.50	39.85	40.62	42.54	45.39	38.88	39.63	41.51	44.28	36.93	37.65	39.43	42.07	34.21	34.88	36.53	38.97	30.30	31.03	33.38	36.11	39.24	32.36	33.09	35.44	38.57	42.60	36.71	39.24
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79	0.99	0.99	0.81	0.60	0.39	0.39	0.61	0.81	1.00	0.81	0.61	
	ΔT	25	24	23	20	25	24	23	20	24	24	23	20	24	24	23	20	22	23	23	20	21	21	21	19	20	20	18	15	12	10	10	12	15	18	14	
	kW	2.96	3.02	3.11	3.21	3.18	3.25	3.35	3.45	3.37	3.45	3.56	3.67	3.55	3.62	3.74	3.86	3.69	3.77	3.90	4.03	3.82	3.90	4.03	4.17	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13
	Amps	10.5	10.8	11.2	11.6	11.4	11.7	12.1	12.6	12.5	12.8	13.2	13.7	13.4	13.7	14.2	14.7	14.2	14.6	15.1	15.7	15.1	15.5	16.0	16.7	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5
	Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	434	405	436	460	480	430	461	485	509	533	557	581	605	629	653	677	701
	Lo PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	158	133	142	155	165	138	147	160	171	140	149	161	173	185	197	209	221	233	245	257	269
85	MBh	40.6	41.4	43.3	46.2	39.6	40.4	42.3	45.1	38.7	39.4	41.3	44.1	37.7	38.5	40.3	43.0	35.9	36.6	38.3	40.8	33.2	33.9	35.5	37.8	30.3	31.0	33.3	36.1	39.2	32.36	33.09	35.44	38.57	42.60	36.71	39.24
	S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	0.99	0.99	0.81	0.60	0.39	0.39	0.61	0.81	1.00	0.81	0.61	
	ΔT	26	25	24	21	26	25	24	21	26	26	24	21	26	26	24	21	24	25	24	21	23	23	22	19	20	20	18	15	12	10	10	12	15	18	14	
	kW	2.93	3.00	3.09	3.18	3.15	3.22	3.32	3.43	3.35	3.42	3.53	3.64	3.52	3.59	3.71	3.83	3.66	3.74	3.87	3.99	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13
	Amps	10.4	10.7	11.1	11.5	11.3	11.6	12.0	12.5	12.3	12.7	13.1	13.6	13.2	13.6	14.0	14.6	14.1	14.5	15.0	15.6	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5
	Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	430	461	485	509	533	557	581	605	629	653	677	701
	Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	140	149	161	173	185	197	209					

EXPANDED COOLING DATA — VSZ130481A* /AR*F48601**

		OUTDOOR AMBIENT TEMPERATURE																																				
		65°F						75°F						85°F						95°F						105°F						115°F						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1800	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	16	14	11	-	16	14	11	-	16	14	11	-
		kW	3.33	3.39	3.48	-	3.55	3.62	3.72	-	3.75	3.82	3.93	-	3.92	4.00	4.12	-	4.07	4.15	4.28	-	4.20	4.28	4.41	-	4.20	4.28	4.41	-	4.20	4.28	4.41	-	4.20	4.28	4.41	-
		Amps	11.8	12.1	12.5	-	12.7	13.0	13.5	-	13.8	14.2	14.6	-	14.8	15.2	15.7	-	15.7	16.1	16.7	-	16.7	17.1	17.7	-	16.7	17.1	17.7	-	16.7	17.1	17.7	-	16.7	17.1	17.7	-
		Hi PR	234	252	266	-	262	282	298	-	298	321	339	-	340	366	386	-	382	411	434	-	422	454	480	-	422	454	480	-	422	454	480	-	422	454	480	-
		Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-	139	147	161	-	139	147	161	-	139	147	161	-
		MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-
	1600	kW	3.31	3.37	3.46	-	3.53	3.59	3.70	-	3.72	3.79	3.90	-	3.89	3.97	4.09	-	4.04	4.12	4.24	-	4.17	4.25	4.38	-	4.17	4.25	4.38	-	4.17	4.25	4.38	-	4.17	4.25	4.38	-
75		Amps	11.7	12.0	12.3	-	12.6	12.9	13.4	-	13.7	14.0	14.5	-	14.7	15.0	15.5	-	15.6	16.0	16.5	-	16.5	16.9	17.5	-	16.5	16.9	17.5	-	16.5	16.9	17.5	-	16.5	16.9	17.5	-
		Hi PR	231	249	263	-	260	279	295	-	295	318	336	-	336	362	382	-	378	407	430	-	418	450	475	-	418	450	475	-	418	450	475	-	418	450	475	-
		Lo PR	110	117	127	-	116	123	135	-	120	128	140	-	127	135	147	-	133	141	154	-	137	146	159	-	137	146	159	-	137	146	159	-	137	146	159	-
		MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-
		S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-
		kW	3.24	3.30	3.39	-	3.45	3.52	3.62	-	3.64	3.71	3.82	-	3.81	3.88	4.00	-	3.95	4.03	4.15	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-
		Amps	11.4	11.6	12.0	-	12.3	12.6	13.0	-	13.3	13.7	14.1	-	14.3	14.6	15.1	-	15.2	15.5	16.1	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-
		Hi PR	224	242	255	-	252	271	286	-	286	308	326	-	326	351	371	-	367	395	417	-	406	436	461	-	406	436	461	-	406	436	461	-	406	436	461	-
		Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-	133	142	155	-	133	142	155	-	133	142	155	-
	1400	kW	3.24	3.30	3.39	-	3.45	3.52	3.62	-	3.64	3.71	3.82	-	3.81	3.88	4.00	-	3.95	4.03	4.15	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-
75		Amps	11.4	11.6	12.0	-	12.3	12.6	13.0	-	13.3	13.7	14.1	-	14.3	14.6	15.1	-	15.2	15.5	16.1	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-
		Hi PR	224	242	255	-	252	271	286	-	286	308	326	-	326	351	371	-	367	395	417	-	406	436	461	-	406	436	461	-	406	436	461	-	406	436	461	-
		Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-	133	142	155	-	133	142	155	-	133	142	155	-
		MBh	45.84	47.20	51.09	54.83	44.77	46.10	49.90	53.55	43.71	45.00	48.71	52.28	42.64	43.90	47.52	51.00	40.51	41.71	45.15	48.45	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88
		S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43
		ΔT	20	19	15	11	20	19	15	11	20	19	15	11	21	19	16	11	20	19	15	11	19	17	14	10	19	17	14	10	19	17	14	10	19	17	14	10
		kW	3.35	3.41	3.51	3.61	3.58	3.65	3.75	3.86	3.78	3.85	3.96	4.08	3.95	4.03	4.15	4.27	4.10	4.18	4.31	4.44	4.23	4.32	4.45	4.58	4.23	4.32	4.45	4.58	4.23	4.32	4.45	4.58	4.23	4.32	4.45	4.58
		Amps	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	14.0	14.3	14.8	15.3	14.9	15.3	15.8	16.4	15.9	16.3	16.8	17.5	16.8	17.3	17.8	18.5	16.8	17.3	17.8	18.5	16.8	17.3	17.8	18.5	16.8	17.3	17.8	18.5
		Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506	427	459	485	506	427	459	485	506	427	459	485	506
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	140	149	163	173	140	149	163	173	140	149	163	173
		MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6
		S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10
75		kW	3.33	3.39	3.48	3.58	3.55	3.62	3.72	3.83	3.75	3.82	3.93	4.05	3.92	4.00	4.12	4.24	4.07	4.15	4.28	4.41	4.20	4.28	4.41	4.55	4.20	4.28	4.41	4.55	4.20	4.28	4.41	4.55	4.20	4.28	4.41	4.55
		Amps	11.8	12.1	12.5	12.9	12.7	13.0	13.5	14.0	13.8	14.2	14.6	15.2	14.8	15.2	15.7	16.3	15.7	16.1	16.7	17.3	16.7	17														

EXPANDED COOLING DATA — VSZ130481A* /AR*F48601** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	
80	1800	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.46	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57											
		S/T	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62											
		ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	23	19	15	21	22	19	15	20	20	18	14											
		kW	3.38	3.44	3.53	3.63	3.60	3.67	3.78	3.89	3.80	3.88	3.99	4.11	3.98	4.06	4.18	4.31	4.13	4.22	4.34	4.48	4.26	4.35	4.48	4.62											
		Amps	12.0	12.3	12.7	13.2	13.0	13.3	13.7	14.2	14.1	14.4	14.9	15.5	15.1	15.4	16.0	16.6	16.0	16.4	17.0	17.6	17.0	17.4	18.0	18.7											
		Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511											
		Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175											
		MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3											
		S/T	0.90	0.85	0.69	0.51	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79	0.59											
		ΔT	23	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	18	15											
	1600	kW	3.35	3.41	3.51	3.61	3.58	3.65	3.75	3.86	3.78	3.85	3.96	4.08	3.95	4.03	4.15	4.28	4.10	4.18	4.31	4.44	4.23	4.32	4.45	4.58											
85		Amps	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	14.0	14.3	14.8	15.3	14.9	15.3	15.8	16.4	15.9	16.3	16.8	17.5	16.8	17.3	17.8	18.5											
		Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506											
		Lo PR	112	119	130	139	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173											
		MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9											
		S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.90	0.73	0.54	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57											
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15											
		kW	3.28	3.34	3.43	3.53	3.50	3.57	3.67	3.77	3.69	3.77	3.87	3.99	3.87	3.94	4.06	4.18	4.01	4.09	4.21	4.34	4.14	4.22	4.34	4.48											
		Amps	11.6	11.8	12.2	12.7	12.5	12.8	13.2	13.7	13.6	13.9	14.4	14.9	14.5	14.9	15.4	16.0	15.5	15.8	16.4	17.0	16.4	16.8	17.3	18.0											
		Hi PR	229	246	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	490											
		Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	152	162	136	144	158	168											
	1400	MBh	47.47	48.39	50.68	54.07	46.37	47.26	49.50	52.81	45.26	46.14	48.32	51.55	44.16	45.01	47.14	50.29	41.95	42.76	44.79	47.78	38.86	39.61	41.49	44.26											
85		S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80											
		ΔT	24	24	22	19	24	24	23	20	23	24	23	20	23	23	20	21	21	22	22	19	20	20	21	18											
		kW	3.40	3.46	3.56	3.66	3.63	3.70	3.80	3.92	3.83	3.91	4.02	4.14	4.01	4.09	4.21	4.34	4.16	4.25	4.38	4.51	4.30	4.38	4.52	4.66											
		Amps	12.1	12.4	12.8	13.3	13.1	13.4	13.9	14.4	14.2	14.6	15.1	15.6	15.2	15.6	16.1	16.7	16.2	16.6	17.1	17.8	17.2	17.6	18.2	18.9											
		Hi PR	241	259	274	285	270	291	307	320	307	331	349	364	350	377	398	415	394	424	448	467	435	468	495	516											
		Lo PR	114	122	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177											
		MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0											
		S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77											
		ΔT	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	23	24	23	20	22	22	22	19											
		kW	3.38	3.44	3.53	3.63	3.60	3.67	3.78	3.89	3.80	3.88	3.99	4.11	3.98	4.06	4.18	4.31	4.13	4.22	4.34	4.48	4.26	4.35	4.48	4.62											
		Amps	12.0	12.3	12.7	13.2	13.0	13.3	13.7	14.2	14.1	14.4	14.9	15.5	15.1	15.4	16.0	16.6	16.0	16.4	17.0	17.6	17.0	17.4	18.0	18.7											
		Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511											
		Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175											
85		MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7											
		S/T	0.91	0.88	0.79	0.64	0.95	0.91	0.82	0.67	0.97	0.94	0.84	0.68	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74											
		ΔT	25	25	24	21	26	25	24	21	26	25	24	21	26	26	24	21	25	25	24	21	23	23	22	19											
		kW	3.31	3.37	3.46	3.56	3.53	3.59	3.69	3.80	3.72	3.79	3.90	4.02	3.89	3.97	4.09	4.21	4.04	4.12	4.24	4.37	4.17	4.25	4.38	4.51											
		Amps	11.7	12.0	12.3	12.8	12.6	12.9	13.3	13.8	13.7	14.0	14.5	15.1	14.7	15.0	15.5	16.1	15.6	16.0	16.5	17.1	16.5	16.9	17.5	18.2											
		Hi PR	231	249	263	274	260	279	295	308	295	318	335	350	336	362	382	399	378	407	430	448	418	450	475	495											
		Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170											
		MBh																																			

EXPANDED COOLING DATA — VSZ130601A* / AR*F48601**

		OUTDOOR AMBIENT TEMPERATURE																																				
		65°F						75°F						85°F						95°F						105°F						115°F						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	2025	MBh	55.9	57.9	63.4	-	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.0	-	49.4	51.2	56.1	-	45.7	47.4	51.9	-	45.7	47.4	51.9	-	45.7	47.4	51.9	-	45.7	47.4	51.9	-
		S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-
		kW	4.11	4.19	4.31	-	4.40	4.49	4.62	-	4.66	4.75	4.90	-	4.88	4.99	5.14	-	5.08	5.18	5.34	-	5.24	5.35	5.52	-	5.24	5.35	5.52	-	5.24	5.35	5.52	-	5.24	5.35	5.52	-
		Amps	14.5	14.8	15.3	-	15.7	16.1	16.6	-	17.1	17.5	18.1	-	18.3	18.7	19.3	-	19.4	19.9	20.6	-	20.6	21.1	21.9	-	20.6	21.1	21.9	-	20.6	21.1	21.9	-	20.6	21.1	21.9	-
		Hi PR	225	242	255	-	252	271	287	-	287	309	326	-	327	352	371	-	367	395	418	-	406	437	461	-	406	437	461	-	406	437	461	-	406	437	461	-
75	1800	Lo PR	102	108	118	-	108	115	125	-	112	119	130	-	118	125	137	-	123	131	143	-	127	136	148	-	127	136	148	-	127	136	148	-	127	136	148	-
		MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-
		kW	4.08	4.16	4.28	-	4.37	4.46	4.59	-	4.62	4.72	4.86	-	4.85	4.95	5.10	-	5.04	5.14	5.30	-	5.20	5.31	5.48	-	5.20	5.31	5.48	-	5.20	5.31	5.48	-	5.20	5.31	5.48	-
		Amps	14.4	14.7	15.2	-	15.5	15.9	16.5	-	16.9	17.3	17.9	-	18.1	18.5	19.2	-	19.3	19.7	20.4	-	20.4	20.9	21.7	-	20.4	20.9	21.7	-	20.4	20.9	21.7	-	20.4	20.9	21.7	-
1575		Hi PR	222	239	253	-	250	269	284	-	284	306	323	-	323	348	368	-	364	392	413	-	402	433	457	-	402	433	457	-	402	433	457	-	402	433	457	-
		Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	126	134	147	-	126	134	147	-	126	134	147	-
		MBh	50.1	51.9	56.8	-	48.9	50.7	55.5	-	47.7	49.5	54.2	-	46.6	48.3	52.9	-	44.2	45.8	50.2	-	41.0	42.5	46.5	-	41.0	42.5	46.5	-	41.0	42.5	46.5	-	41.0	42.5	46.5	-
		S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-
		ΔT	20	18	13	-	20	18	13	-	21	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-
		kW	3.99	4.07	4.18	-	4.27	4.35	4.48	-	4.52	4.61	4.75	-	4.73	4.83	4.98	-	4.92	5.02	5.18	-	5.08	5.19	5.35	-	5.08	5.19	5.35	-	5.08	5.19	5.35	-	5.08	5.19	5.35	-
2025		Amps	14.0	14.3	14.8	-	15.1	15.5	16.0	-	16.4	16.8	17.4	-	17.6	18.0	18.6	-	18.7	19.2	19.8	-	19.9	20.4	21.0	-	19.9	20.4	21.0	-	19.9	20.4	21.0	-	19.9	20.4	21.0	-
		Hi PR	216	232	245	-	242	261	275	-	275	296	313	-	314	338	356	-	353	380	401	-	390	420	443	-	390	420	443	-	390	420	443	-	390	420	443	-
		Lo PR	98	104	114	-	103	110	120	-	108	114	125	-	113	120	131	-	118	126	137	-	122	130	142	-	122	130	142	-	122	130	142	-	122	130	142	-
		MBh	56.80	58.48	63.30	67.94	55.48	57.12	61.83	66.36	54.16	55.76	60.36	64.78	52.84	54.40	58.89	63.20	50.20	51.68	55.94	60.04	46.50	47.87	51.82	55.62	46.50	47.87	51.82	55.62	46.50	47.87	51.82	55.62	46.50	47.87	51.82	55.62
		S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.98	0.88	0.67	0.43	0.98	0.88	0.67	0.43	0.98	0.88	0.67	0.43
		ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11
75	2025	kW	4.14	4.22	4.34	4.47	4.43	4.52	4.66	4.80	4.69	4.79	4.94	5.09	4.92	5.02	5.18	5.34	5.12	5.22	5.39	5.56	5.29	5.40	5.57	5.75	5.29	5.40	5.57	5.75	5.29	5.40	5.57	5.75	5.29	5.40	5.57	5.75
		Amps	14.6	15.0	15.5	16.1	15.8	16.2	16.8	17.4	17.2	17.7	18.2	18.9	18.4	18.9	19.5	20.3	19.6	20.1	20.8	21.6	20.8	21.3	22.1	22.9	20.8	21.3	22.1	22.9	20.8	21.3	22.1	22.9	20.8	21.3	22.1	22.9
		Hi PR	227	244	258	269	255	274	289	302	290	312	329	343	330	355	375	391	371	399	422	440	410	441	466	486	410	441	466	486	410	441	466	486	410	441	466	486
		Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159	129	137	150	159	129	137	150	159	129	137	150	159
		MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	45.1	46.5	50.3	54.0	45.1	46.5	50.3	54.0	45.1	46.5	50.3	54.0
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41
1800		ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11
		kW	4.11	4.19	4.31	4.44	4.40	4.49	4.62	4.76	4.66	4.75	4.90	5.05	4.89	4.99	5.14	5.30	5.08	5.18	5.34	5.51	5.24	5.35	5.52	5.70	5.24	5.35	5.52	5.70	5.24	5.35	5.52	5.70	5.24	5.35	5.52	5.70
		Amps	14.5	14.8	15.3	15.9	15.7	16.1	16.6	17.2	17.1	17.5	18.1	18.8	18.3	18.7	19.3	20.1	19.5	19.9	20.6	21.4	20.6	21.1	21.9	22.7	20.6	21.1	21.9	22.7	20.6	21.1	21.9	22.7	20.6	21.1	21.9	22.7
		Hi PR	225	242	255	266	252	271	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	461	481	406	437	461	481	406	437	461	481	406	437	461	481
		Lo PR	102	108	118	126	108	115	125	133	112	119	130	139	118	125	137	146	123	131	143	152	128	136	148	158	128	136	148	158	128	136	148	158	128	136	148	158
		MBh	50.9	52.4	56.7	60.9	49.7	51.2	55.4	59.5	48.5	50.0	54.1	58.1	47.3	48.75	52.8	56.6	45.0	46.3	50.1	53.8	41.7	42.9	46.4	49.8	41.7	42.9	46.4	49.8	41.7	42.9	46.4	49.8	41.7	42.9	46.4	49.8
1575		S/T	0.79	0.70	0.53	0.34</																																

EXPANDED COOLING DATA — VSZ130601A* / AR*F48601** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																							
		65°F						75°F						85°F						95°F						105°F						115°F									
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203			
80	MBh	57.81	59.07	63.11	67.47	56.47	57.70	61.65	65.90	55.12	56.33	60.18	64.33	53.78	54.95	58.71	62.76	51.09	52.20	55.77	59.62	47.32	48.36	51.66	55.23	47.32	48.36	51.66	55.23	47.32	48.36	51.66	55.23	47.32	48.36	51.66	55.23	47.32	48.36	51.66	55.23
	S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62
	ΔT	25	24	21	16	26	24	21	17	25	24	21	17	24	24	21	17	23	24	21	17	23	24	21	15	23	24	21	17	23	24	21	17	23	24	21	17	23	24	21	15
	kW	4.17	4.25	4.38	4.51	4.47	4.56	4.69	4.84	4.73	4.83	4.97	5.13	4.96	5.06	5.22	5.39	5.16	5.27	5.43	5.60	5.33	5.44	5.61	5.79	5.16	5.27	5.43	5.60	5.33	5.44	5.61	5.79	5.16	5.27	5.43	5.60	5.33	5.44	5.61	5.79
	Amps	14.8	15.1	15.6	16.2	16.0	16.4	16.9	17.6	17.4	17.8	18.4	19.1	18.6	19.1	19.7	20.5	19.8	20.3	21.0	21.8	21.0	21.5	22.3	23.1	19.8	20.3	21.0	21.8	21.0	21.5	22.3	23.1	21.0	21.5	22.3	23.1	21.0	21.5	22.3	23.1
	Hi PR	229	247	261	272	257	277	292	305	293	315	333	347	333	359	379	395	375	404	426	444	414	446	471	491	375	404	426	444	414	446	471	491	375	404	426	444	414	446	471	491
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	148	126	134	146	156	130	138	151	161	126	134	146	156	130	138	151	161	126	134	146	156	130	138	151	161
	MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6	45.9	46.9	50.2	53.6	45.9	46.9	50.2	53.6	45.9	46.9	50.2	53.6	45.9	46.9	50.2	53.6
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	1.00	0.96	0.78	0.59	1.00	0.96	0.78	0.59
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	25	25	22	17	23	23	20	16	25	25	22	17	23	23	20	16	25	25	22	17	23	23	20	16
	kW	4.14	4.22	4.34	4.47	4.43	4.52	4.66	4.80	4.69	4.79	4.94	5.09	4.92	5.03	5.18	5.34	5.12	5.23	5.39	5.56	5.29	5.40	5.57	5.75	5.12	5.23	5.39	5.56	5.29	5.40	5.57	5.75	5.12	5.23	5.39	5.56	5.29	5.40	5.57	5.75
	Amps	14.6	15.0	15.5	16.1	15.8	16.2	16.8	17.4	17.2	17.7	18.2	18.9	18.4	18.9	19.5	20.3	19.6	20.1	20.8	21.6	20.8	21.3	22.1	22.9	19.6	20.1	20.8	21.6	20.8	21.3	22.1	22.9	20.8	21.3	22.1	22.9	20.8	21.3	22.1	22.9
	Hi PR	227	244	258	269	255	274	290	302	290	312	329	343	330	355	375	391	371	400	422	440	410	441	466	486	371	400	422	440	410	441	466	486	371	400	422	440	410	441	466	486
	Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159	125	132	145	154	129	137	150	159	125	132	145	154	129	137	150	159
1575	MBh	51.8	52.9	56.6	60.5	50.6	51.7	55.2	59.1	49.4	50.5	53.9	57.6	48.2	49.2	52.6	56.2	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5
	S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57
	ΔT	26	25	22	17	26	25	22	18	26	25	22	18	27	26	22	18	26	25	22	17	25	24	20	16	26	25	22	17	25	24	20	16	26	25	22	17	25	24	20	16
	kW	4.05	4.13	4.25	4.37	4.33	4.42	4.55	4.69	4.59	4.68	4.82	4.97	4.81	4.91	5.06	5.22	5.00	5.10	5.26	5.43	5.16	5.27	5.43	5.61	5.00	5.10	5.26	5.43	5.16	5.27	5.43	5.61	5.00	5.10	5.26	5.43	5.16	5.27	5.43	5.61
	Amps	14.2	14.6	15.1	15.6	15.4	15.8	16.3	16.9	16.7	17.2	17.7	18.4	17.9	18.4	19.0	19.7	19.1	19.6	20.2	21.0	20.2	20.7	21.4	22.3	19.1	19.6	20.2	21.0	20.2	20.7	21.4	22.3	20.2	20.7	21.4	22.3	20.2	20.7	21.4	22.3
	Hi PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	364	379	360	388	409	427	398	428	452	472	360	388	409	427	398	428	452	472	360	388	409	427	398	428	452	472
	Lo PR	100	106	116	124	106	112	123	131	110	117	127	136	115	123	134	143	121	129	140	149	125	133	145	155	121	129	140	149	125	133	145	155	121	129	140	149	125	133	145	155
	MBh	58.82	59.96	62.80	67.00	57.45	58.57	61.34	65.44	56.09	57.17	59.88	63.88	54.72	55.78	58.42	62.32	51.98	52.99	55.50	59.21	48.15	49.08	51.41	54.84	51.98	52.99	55.50	59.21	48.15	49.08	51.41	54.84	48.15	49.08	51.41	54.84	48.15	49.08	51.41	54.84
	S/T	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.80
	ΔT	26	26	24	21	26	26	25	21	25	26	25	21	25	25	25	22	24	24	25	21	22	22	20	20	22	24	24	25	21	22	22	20	22	24	24	25	21	22	22	20
	kW	4.20	4.28	4.41	4.54	4.50	4.59	4.73	4.87	4.77	4.86	5.01	5.17	5.00	5.10	5.26	5.43	5.20	5.31	5.47	5.65	5.37	5.48	5.66	5.84	5.20	5.31	5.47	5.65	5.37	5.48	5.66	5.84	5.20	5.31	5.47	5.65	5.37	5.48	5.66	5.84
	Amps	14.9	15.3	15.8	16.4	16.1	16.5	17.1	17.7	17.5	18.0	18.6	19.3	18.8	19.2	19.9	20.7	20.0	20.5	21.2	22.0	21.2	21.7	22.5	23.4	20.0	20.5	21.2	22.0	21.2	21.7	22.5	23.4	21.2	21.7	22.5	23.4	21.2	21.7	22.5	23.4
	Hi PR	232	249	263	275	260	280	295	308	296	318	336	350	337	362	383	399	379	408	430	449	418	450	475	496	379	408	430	449	418	450	475	496	379	408	430	449	418	450	475	496
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163	127	135	148	157	131	140	153	163	127	135	148	157	131	140	153	163
85	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2	46.7	47.7	49.9	53.2	46.7	47.7	49.9	53.2
	S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	27	27	26	22	26	26	26	22	24	24	21	21	26	26	26	22	24	24	21	21	24	24	21	21	24	24	21	21
	kW	4.17	4.25	4.38	4.51	4.47	4.56	4.69	4.84	4.73	4.83	4.97	5.13	4.96																											

EXPANDED HEATING DATA

VSZ130181A* / AR°F182416**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	21.4	20.2	19.0	17.8	17.0	16.5	15.3	14.1	13.3	12.3	11.3	10.7	10.3	9.2	8.2	7.2	6.1	5.0
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	20.6	19.0	17.5	16.5	15.9	14.3	12.7	11.0	9.4	7.7
kW	1.68	1.64	1.61	1.58	1.6	1.54	1.51	1.48	1.46	1.42	1.39	1.37	1.36	1.32	1.29	1.26	1.23	1.19
Amps	7.3	6.7	6.3	5.9	5.7	5.6	5.3	5.0	4.8	4.6	4.3	4.2	4.2	4.0	3.7	3.5	3.2	2.9
COP	3.73	3.60	3.46	3.30	3.19	3.12	2.96	2.79	2.68	2.53	2.39	2.29	2.22	2.04	1.86	1.66	1.46	1.22
EER	12.8	12.3	11.8	11.3	10.9	10.7	10.1	9.5	9.2	8.7	8.2	7.8	7.6	7.0	6.3	5.7	5.0	4.2
Hi PR	392	375	361	345	337	331	318	305	292	279	268	262	257	247	238	228	220	212
Lo PR	145	134	126	115	109	105	96	86	77	69	61	57	55	46	40	34	29	23

VSZ130241C* / AR°F182416**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	28.9	27.4	25.8	24.1	23.0	22.3	20.7	19.1	16.9	15.6	14.3	13.6	13.0	11.7	10.4	9.1	7.7	6.3
ΔT	33.5	31.7	29.8	27.9	26.6	25.8	24.0	22.1	19.5	18.0	16.6	15.7	15.1	13.6	12.0	10.5	8.9	7.3
kW	2.17	2.12	2.08	2.04	2.0	2.00	1.96	1.91	1.80	1.76	1.72	1.70	1.68	1.64	1.60	1.57	1.52	1.49
Amps	10.1	9.3	8.7	8.2	7.9	7.7	7.3	6.9	6.6	6.3	6.0	5.9	5.8	5.5	5.2	4.9	4.5	4.0
COP	3.91	3.77	3.62	3.46	3.34	3.27	3.10	2.92	2.74	2.59	2.44	2.33	2.27	2.08	1.89	1.69	1.48	1.25
EER	13.3	12.9	12.4	11.8	11.4	11.2	10.6	10.0	9.4	8.8	8.3	8.0	7.7	7.1	6.5	5.8	5.1	4.3
Hi PR	413	395	380	364	355	348	335	321	308	294	282	275	271	260	250	240	231	223
Lo PR	131	122	114	105	99	95	88	78	70	63	55	51	50	42	36	30	27	21

VSZ130301A* / AR°F30301**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	33.2	31.4	29.6	27.6	26.4	25.6	23.8	21.9	19.9	18.4	16.9	16.0	15.4	13.8	12.3	10.7	9.1	7.5
ΔT	29.3	27.7	26.1	24.4	23.3	22.6	21.0	19.3	17.6	16.2	14.9	14.1	13.6	12.2	10.8	9.4	8.0	6.6
kW	2.52	2.47	2.42	2.37	2.3	2.32	2.28	2.23	2.37	2.32	2.26	2.23	2.21	2.16	2.11	2.05	2.00	1.95
Amps	9.7	9.0	8.5	8.0	7.7	7.6	7.2	6.9	6.6	6.3	6.0	5.9	5.8	5.6	5.2	5.0	4.6	4.2
COP	3.86	3.72	3.57	3.41	3.29	3.22	3.05	2.88	2.46	2.32	2.19	2.10	2.04	1.88	1.70	1.52	1.34	1.12
EER	13.2	12.7	12.2	11.6	11.3	11.0	10.4	9.8	8.4	7.9	7.5	7.2	7.0	6.4	5.8	5.2	4.6	3.8
Hi PR	366	351	337	323	315	309	297	285	273	261	250	244	240	231	222	213	205	198
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

VSZ130361B* / AR°F364216**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.7	40.5	38.1	35.6	34.0	32.9	30.6	28.2	2.6	2.4	2.2	2.1	2.0	1.8	1.6	1.4	1.2	1.0
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	2.0	1.9	1.7	1.6	1.6	1.4	1.2	1.1	0.9	0.8
kW	3.09	3.03	2.97	2.90	2.9	2.84	2.79	2.73	2.70	2.64	2.58	2.54	2.52	2.45	2.39	2.33	2.27	2.21
Amps	14.0	13.0	12.1	11.4	11.0	10.8	10.2	9.7	9.3	8.8	8.4	8.2	8.1	7.7	7.2	6.8	6.3	5.6
COP	4.05	3.91	3.76	3.59	3.47	3.39	3.21	3.03	0.28	0.27	0.25	0.24	0.23	0.22	0.20	0.18	0.15	0.13
EER	13.8	13.4	12.8	12.3	11.8	11.6	11.0	10.4	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.6	0.5	0.4
Hi PR	383	368	353	338	330	324	311	299	286	273	262	256	251	242	233	223	215	208
Lo PR	133	123	115	106	100	96	89	79	71	64	56	52	50	42	37	31	27	21

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

EXPANDED HEATING DATA (CONT.)

VSZ130421A* / AR*F36421**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	50.3	47.6	44.8	41.9	40.0	38.8	36.0	33.2	29.9	27.6	25.4	24.0	23.1	20.7	18.4	16.0	13.7	11.2
ΔT	34.5	32.6	30.7	28.7	27.4	26.6	24.7	22.8	20.5	18.9	17.4	16.5	15.9	14.2	12.6	11.0	9.4	7.7
kW	3.60	3.53	3.46	3.39	3.4	3.32	3.25	3.18	3.24	3.16	3.09	3.05	3.02	2.95	2.88	2.80	2.73	2.66
Amps	16.9	15.6	14.5	13.6	13.1	12.9	12.1	11.5	10.9	10.4	9.9	9.7	9.5	9.0	8.4	7.9	7.2	6.4
COP	4.09	3.95	3.79	3.62	3.49	3.42	3.24	3.05	2.70	2.55	2.40	2.30	2.24	2.06	1.87	1.67	1.47	1.23
EER	14.0	13.5	12.9	12.4	11.9	11.7	11.1	10.4	9.2	8.7	8.2	7.9	7.6	7.0	6.4	5.7	5.0	4.2
Hi PR	368	353	340	325	317	311	299	287	275	262	252	246	242	232	223	214	207	199
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

VSZ130481A* / AR*F48601**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	55.3	52.4	49.3	46.1	44.0	42.6	39.6	36.5	33.6	31.1	28.6	27.0	26.0	23.3	20.7	18.0	15.4	12.6
ΔT	32.0	30.3	28.5	26.7	25.5	24.7	22.9	21.1	19.5	18.0	16.5	15.6	15.0	13.5	12.0	10.4	8.9	7.3
kW	3.93	3.87	3.80	3.73	3.7	3.66	3.59	3.52	3.37	3.30	3.23	3.19	3.17	3.10	3.04	2.97	2.90	2.84
Amps	18.2	16.8	15.7	14.8	14.3	14.0	13.2	12.5	12.0	11.4	10.9	10.6	10.5	9.9	9.3	8.7	8.1	7.3
COP	4.11	3.96	3.80	3.62	3.49	3.41	3.23	3.03	2.93	2.76	2.59	2.47	2.40	2.20	1.99	1.78	1.55	1.30
EER	14.1	13.5	13.0	12.4	11.9	11.7	11.0	10.4	10.0	9.4	8.8	8.5	8.2	7.5	6.8	6.1	5.3	4.4
Hi PR	380	364	350	335	327	321	308	296	284	271	260	254	249	240	231	221	213	206
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

VSZ130601A* / AR*F48601**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	72.9	69.0	65.0	60.7	58.0	56.2	52.2	48.1	44.9	41.4	38.1	36.0	34.7	31.1	27.6	24.0	20.5	16.8
ΔT	37.5	35.5	33.4	31.2	29.8	28.9	26.9	24.8	23.1	21.3	19.6	18.5	17.8	16.0	14.2	12.4	10.6	8.6
kW	5.21	5.11	5.01	4.92	4.9	4.82	4.72	4.63	4.66	4.56	4.46	4.40	4.36	4.26	4.16	4.06	3.96	3.86
Amps	24.0	22.2	20.7	19.5	18.8	18.4	17.3	16.4	15.7	15.0	14.2	13.9	13.7	13.0	12.1	11.3	10.5	9.4
COP	4.10	3.95	3.79	3.62	3.49	3.41	3.23	3.05	2.82	2.66	2.50	2.40	2.33	2.14	1.94	1.73	1.52	1.28
EER	14.0	13.5	13.0	12.4	11.9	11.7	11.1	10.4	9.6	9.1	8.6	8.2	8.0	7.3	6.6	5.9	5.2	4.4
Hi PR	416	399	383	367	358	351	338	324	310	296	285	278	273	262	252	242	233	225
Lo PR	133	123	115	106	100	96	89	79	71	64	56	52	50	42	37	31	27	21

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY				TVA RATINGS ³			HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.		HIGH	HSPF ⁴	LOW		
VSZ13 0181A*	ACNF24XX16D*		17,400	12,400	13.00	10.90	16,100	12,700		17,000	7.70	10,000	600	4689701
	ARPT18B14A*		17,400	12,400	13.00	11.00	16,100	12,700		17,200	7.70	10,000	570	5429734
	ARPT24B14A*		17,400	12,400	13.00	11.00	16,100	12,700		17,200	7.70	10,000	570	5429736
	ARUF18B14A*		17,400	12,400	13.00	11.00	16,100	12,700		17,200	7.70	10,500	600	5358278
	ARUF18B14A*+TXV		17,400	12,400	13.00	11.00	16,100	12,700		17,200	7.70	10,400	600	5439798
	ARUF24B14B*		18,000	12,900	13.00	11.00	16,700	13,200		17,000	7.70	10,000	600	5583629
	ARUF24B14B*+TXV		17,400	12,400	13.00	11.00	16,100	12,700		17,200	7.70	10,400	600	5583630
	ASPT24B14A*		17,800	12,700	14.00	12.00	16,500	13,000		15,200	7.70	9,200	605	5722648
	ASUF29B14A*		17,800	12,700	13.50	11.50	16,500	13,000		15,200	7.70	8,800	605	5722649
	ASUF29B14A*+TXV		17,800	12,700	14.00	12.00	16,500	13,000		15,200	7.70	8,800	605	5722650
	AVPTC24B14A*		17,800	12,700	14.00	12.00	16,500	13,000		15,200	7.70	9,200	600	5924430
	AWUF18XX16B*		17,400	12,400	13.00	11.00	16,100	12,700		17,000	8.00	10,000	650	3650273
	AWUF24XX16B*		17,400	12,400	13.00	11.00	16,100	12,700		17,000	8.00	10,000	600	3650274
	AWUF31XX16A*		17,400	12,400	14.00	11.30	16,100	12,700		17,500	8.20	10,000	600	3650275
	CA*F1824*6D*	G*E80603B*B*	17,400	12,400	14.00	11.30	16,100	12,700		17,000	8.00	10,000	650	5038660
	CA*F1824*6D*	G*VC950453BxB*	17,400	12,400	13.50	11.30	16,100	12,700		17,000	8.00	10,000	600	5623174
	CA*F1824*6D*	G*VC950704CXB*	17,400	12,400	13.50	11.00	16,100	12,700		17,000	8.00	10,000	600	5623177
	CA*F1824*6D*	G*VM960603BxB*	17,400	12,400	13.50	11.30	16,100	12,700		17,000	8.00	10,000	600	5623178
	CA*F1824*6D*	A*EH800603B*A*	17,400	12,400	14.00	11.30	11,500	9,100		17,000	8.0	10,000	650	6844604
	CA*F1824*6D*+EEP		17,400	12,400	13.00	11.50	16,100	12,700		17,000	7.80	10,000	600	4150321
	CA*F1824*6D*+MBVC1200**1A*		17,400	12,400	14.00	11.30	16,100	12,700		17,000	8.00	10,000	600	4150322
	CAPT3131*4A*+EEP		17,400	12,400	13.00	11.00	16,100	12,700		16,600	7.70	10,200	650	5611353
	CAPT3131*4A*+MBVC1200**1A*		17,400	12,400	14.00	11.50	16,100	12,700		16,000	7.70	9,700	600	5611345
	CHPF1824A6C*+EEP		17,400	12,400	13.00	11.50	16,100	12,700		17,000	7.80	10,000	600	3639801
	CHPF2430B6C*	G*E80603B*B*	17,400	12,400	14.00	11.30	16,100	12,700		17,000	8.00	10,000	650	5038703
	CHPF2430B6C*	G*VM960603BxB*	17,400	12,400	13.50	11.30	16,100	12,700		17,000	8.00	10,000	600	5623179
	CHPF2430B6C*	G*VC950453BxB*	17,400	12,400	13.50	11.30	16,100	12,700		17,000	8.00	10,000	600	5623175
	CHPF2430B6C*	A*EH800603B*A*	17,400	12,400	14.00	11.30	11,500	9,100		17,000	8.0	10,000	650	6844641
	CHPF2430B6C*+MBVC1200**1A*		17,800	12,700	14.00	11.30	16,500	13,000		17,000	8.00	10,000	600	3639821
	CSCF1824N6D*	G*VC950453BxB*	17,400	12,400	13.50	11.30	16,100	12,700		17,000	8.00	10,000	650	5623176
	CSCF1824N6D*+EEP		17,400	12,400	13.00	11.00	16,100	12,700		17,000	7.80	10,000	600	4767657

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F ² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F ⁴ HSPF = Heating Seasonal Performance Factor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
VSZ13 0241B*	ACNF24XX16D*		23,400	17,600	13.00	11.00	21,600	17,300	23,000	7.70	13,800	770	4689697
	ACNF30XX16D*		23,600	17,800	13.00	11.00	21,800	17,500	23,000	7.70	13,800	770	4689698
	ARUF24B14B*		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,500	800	5583715
	ARUF24B14B*+TXV		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,500	800	5650960
	ARUF30B14A*+TXV		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,600	775	5439801
	ASPT24B14A*		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	11,300	810	5722757
	ASUF29B14A*		22,800	17,200	13.30	11.30	21,200	16,900	21,600	7.70	10,800	810	5722758
	ASUF29B14A*+TXV		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	10,800	810	5722759
	AVPTC24B14A*		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	11,300	840	5924431
	AWUF24XX16B*		22,800	17,200	13.00	11.00	21,200	16,900	23,000	8.00	13,800	800	3859191
	AWUF30XX16B*		23,400	17,600	13.00	11.00	21,600	17,300	23,000	8.00	13,800	800	3859193
	AWUF31XX16A*		24,000	18,100	14.00	12.00	22,200	17,800	22,800	8.20	13,400	800	3859194
	AWUF32XX16A*		24,000	18,100	14.00	12.00	22,200	17,800	22,800	8.20	13,400	800	3859195
	AWUF36XX16B*		24,000	18,100	13.00	11.00	22,200	17,800	23,200	8.00	13,800	800	3859196
	CA*F1824*6D*	G*E80603B*B*	23,200	17,500	14.00	11.30	21,400	17,200	22,800	8.00	13,200	860	5038689
	CA*F1824*6D*	A*EH800603B*A*	23,200	17,500	14.00	11.30	16,200	12,900	22,800	8.0	13,200	860	6844630
	CA*F1824*6D*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,600	8.00	13,800	800	4150330
	CA*F1824*6D*+MBVC1200**_1A*		23,800	17,900	14.00	12.00	22,000	17,600	22,800	8.20	13,200	800	4150331
	CHPF1824A6C*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,400	7.80	13,800	800	3859206
	CHPF2430B6C*	G*E80603B*B*	23,200	17,500	14.00	11.30	21,400	17,200	23,000	8.00	13,400	860	5038651
	CHPF2430B6C*	G*VM960603BxB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5623185
	CHPF2430B6C*	A*VM960603BxB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5623184
	CHPF2430B6C*	A*VC950453BxB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5623180
	CHPF2430B6C*	G*VC950453BxB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5623181
	CHPF2430B6C*	A*EH800603B*A*	23,200	17,500	14.00	11.30	16,200	12,900	23,000	8.0	13,400	860	6844594
	CHPF2430B6C*+MBVC1200**_1A*		24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,200	800	3859213
	CSCF1824N6D*	G*VC950453BxB*	23,800	17,900	14.00	12.00	22,000	17,600	23,000	8.20	13,400	800	5623183
	CSCF1824N6D*	A*VC950453BxB*	23,800	17,900	14.00	12.00	22,000	17,600	23,000	8.20	13,400	800	5623182
	CSCF1824N6D*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,600	8.00	13,400	825	4767662

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY			TVA RATINGS ³			HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
VSZ13 0301A*	ACNF30XX16D*		27,000	20,400	13.00	10.80	25,000	20,200	25,800	7.70	14,000	875	4689699
	ARPT36C14A*		28,400	21,400	13.00	10.90	26,200	21,400	27,000	8.00	16,600	980	5429598
	ARUF30C14B*		27,400	20,600	13.00	11.00	25,400	20,600	27,000	7.80	16,400	1,000	5936465
	ARUF30C14B*+TXV		28,000	21,200	13.00	11.00	26,000	21,000	27,000	8.00	16,400	1,000	5936017
	ARUF36C14B*		27,400	20,600	13.00	11.00	25,400	20,600	27,000	7.80	16,400	950	5649401
	ARUF36C14B*+TXV		28,000	21,200	13.00	11.00	26,000	21,000	27,000	8.00	16,400	950	5647201
	ASPT36C14A*		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,010	5722654
	ASUF39C14A*		28,600	21,600	13.50	11.50	26,400	21,400	26,200	8.00	16,000	1,010	5722653
	ASUF39C14A*+TXV		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,010	5722691
	AVPTC36C14A*		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,015	5924420
	AWUF30XX16B*		27,400	20,600	13.00	11.00	25,400	20,600	25,600	8.00	14,400	1,025	3650294
	AWUF36XX16B*		28,000	21,200	13.00	11.00	26,000	21,000	25,600	8.00	14,400	1,025	3650295
	AWUF37XX16B*		28,000	21,200	13.00	11.00	26,000	21,000	25,800	8.00	14,000	1,050	3650296
	CA*F3131*6D*	G*E80603B*B*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	5038618
	CA*F3131*6D*	A*VC950714CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623190
	CA*F3131*6D*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5623186
	CA*F3131*6D*	G*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5623192
	CA*F3131*6D*	G*VC950714CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623191
	CA*F3131*6D*	A*VM960604CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623194
	CA*F3131*6D*	G*VM960604CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623195
	CA*F3131*6D*	G*VC950704CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	900	5623189
	CA*F3131*6D*	A*EH800603B*A*	28,400	21,400	13.50	11.30	19,900	16,100	26,400	8.2	16,000	1,050	6844569
	CA*F3131*6D*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,000	4385577
	CA*F3636*6D*+EEP		28,600	21,600	13.00	11.00	26,400	21,400	26,400	7.80	16,000	1,050	4392868
	CHPF2430B6C*	G*E80603B*B*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	5038652
	CHPF2430B6C*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623187
	CHPF2430B6C*	G*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5623193
	CHPF2430B6C*	A*EH800603B*A*	28,400	21,400	13.50	11.30	19,900	16,100	26,400	8.2	16,000	1,050	6844596
	CHPF2430B6C*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,050	3639817
	CHPF2430B6C*+MBVC1200*-1A*		28,400	21,400	14.00	11.30	26,200	21,400	26,400	8.20	16,000	1,050	3639823
	CSCF3036N6D*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5623188
	CSCF3036N6D*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,000	4767666

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY			TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
VSZ13 0361B*	ARPT36C14A*		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	5429739
	ARPT36D14A*		35,000	26,600	13.50	11.50	32,400	26,000	32,200	8.00	20,600	5429740
	ARPT42D14A*		33,600	25,600	13.50	11.50	31,200	24,800	32,200	8.00	20,800	5429741
	ARUF36C14B*		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	5731498
	ARUF36C14B*+TXV		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	5647202
	ARUF42C14A*		33,600	25,600	13.00	11.00	31,200	24,800	34,000	8.00	20,800	5598663
	ARUF42C14A*+TXV		33,600	25,600	13.00	11.00	31,200	24,800	34,000	8.00	20,800	5429747
	ASPT36C14A*		34,000	25,800	13.50	11.50	31,400	25,200	33,000	8.00	19,900	5722658
	ASUF39C14A*		34,000	25,800	13.00	11.00	31,400	25,200	33,000	8.00	21,800	5722659
	ASUF39C14A*+TXV		34,000	25,800	13.50	11.50	31,400	25,200	33,000	8.00	21,800	5722660
	AVPTC36C14A*		34,000	25,800	14.00	11.50	31,400	25,200	33,000	8.00	19,900	5924432
	AWUF37XX16B*		34,000	25,800	13.00	11.00	31,400	25,200	34,000	8.00	21,000	3859238
	CA*F3636*6D*	G*VC91155DXA*	35,000	26,600	14.00	11.50	32,400	26,000	32,800	8.20	20,200	4392872
	CA*F3636*6D*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	5038663
	CA*F3636*6D*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,400	8.20	20,000	5038672
	CA*F3636*6D*	G*VC950905DXB*	35,200	26,800	13.50	11.30	32,600	26,000	33,000	8.00	21,000	5623199
	CA*F3636*6D*	G*VM961005DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	5623212
	CA*F3636*6D*	G*VM960805CXB*	35,200	26,800	13.50	11.20	32,600	26,000	33,000	8.00	21,000	5623207
	CA*F3636*6D*	G*VM961155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	5623215
	CA*F3636*6D*	G*VC950905CXB*	35,200	26,800	13.50	11.20	32,600	26,000	33,000	8.00	21,000	5623196
	CA*F3636*6D*	G*VC951155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	5623204
	CA*F3636*6D*	A*EH801005C*A*	35,200	26,800	13.50	11.30	24,800	19,800	32,000	8.2	20,000	6844607
	CA*F3636*6D*	A*EH800805C*A*	33,800	25,600	13.50	11.30	23,800	19,000	32,400	8.2	20,000	6844615
	CA*F3636*6D*+EEP		34,600	26,200	13.00	11.00	32,000	25,600	33,400	7.80	21,000	4392876
	CA*F3642*6D*	G*VC91155DXA*	35,200	26,800	14.00	11.50	32,600	26,000	32,600	8.20	20,200	3880669
	CA*F3642*6D*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	5038690
	CA*F3642*6D*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,000	8.20	20,000	5038653
	CA*F3642*6D*	G*VC950905CXB*	35,200	26,800	13.50	11.20	32,600	26,000	32,200	8.00	20,200	5623197
	CA*F3642*6D*	A*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	5623202
	CA*F3642*6D*	G*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	5623203
	CA*F3642*6D*	G*VM961155DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	5623216
	CA*F3642*6D*	G*VC950905DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	5623200
	CA*F3642*6D*	G*VM961005DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	5623213
	CA*F3642*6D*	G*VC951155DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	5623205
	CA*F3642*6D*	G*VM960805CXB*	35,200	26,800	13.50	11.20	32,600	26,000	32,200	8.00	20,200	5623208

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY			TVA RATINGS ³			HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW		
	CA *F3642*6D*	G*VM960805DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	1,050	5623210
	CA *F3642*6D*	A*EH800805C*A*	33,800	25,600	13.50	11.30	23,800	19,000	32,000	8.2	20,000	1,060	6844598
	CA *F3642*6D*	A*EH801005C*A*	35,200	26,800	13.50	11.30	24,800	19,800	32,000	8.2	20,000	1,230	6844631
	CA *F3642*6D*+EEP		34,600	26,200	13.00	11.00	32,000	25,600	33,200	8.00	21,000	1,050	3880684
	CA *F3642*6D*+MBVC1600**-1A*		35,200	26,800	14.00	11.50	32,600	26,000	32,000	8.20	20,000	1,200	3880696
	CAPT3743*4A*+EEP		34,200	26,000	13.00	11.00	31,600	25,400	34,000	8.00	21,000	1,100	5611346
	CAPT3743*4A*+MBVC1600**-1A*		34,600	26,200	14.00	11.50	32,000	25,600	33,800	8.00	20,000	1,200	5611347
	CAPT3743*4A*+MBVC2000**-1A*		34,600	26,200	14.00	11.50	32,000	25,600	33,600	8.00	20,000	1,200	5611348
	CHPF363686C*	G*E81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	33,200	8.20	20,000	1,230	5038704
	CHPF363686C*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,000	8.20	20,000	1,060	5038723
	CHPF363686C*	A*EH801005C*A*	35,000	26,600	13.50	11.30	24,600	19,700	33,200	8.2	20,000	1,230	6844643
	CHPF363686C*	A*EH800805C*A*	33,800	25,600	13.50	11.30	23,800	19,000	32,000	8.2	20,000	1,060	6844663
	CHPF363686C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3859250
	CHPF3642C6C*	G*E81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.20	20,000	1,230	5038705
	CHPF3642C6C*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,600	8.20	20,000	1,060	5038691
	CHPF3642C6C*	A*EH800805C*A*	33,800	25,600	13.50	11.30	23,800	19,000	32,600	8.2	20,000	1,060	6844633
	CHPF3642C6C*	A*EH801005C*A*	35,000	26,600	13.50	11.30	24,600	19,700	32,800	8.2	20,000	1,230	6844644
	CHPF3642C6C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3859252
	CHPF3642C6C*+MBVC1600**-1A*		34,800	26,400	14.00	11.50	32,200	25,800	32,600	8.20	20,000	1,200	3859254
	CHPF3642D6C*	G*VC91155DXA*	35,000	26,600	14.00	11.50	32,400	26,000	32,800	8.20	20,200	1,050	3859258
	CHPF3642D6C*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	5038692
	CHPF3642D6C*	G*VC950905DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,600	8.00	20,000	1,050	5623201
	CHPF3642D6C*	G*VC951155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5623206
	CHPF3642D6C*	G*VM960805DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,600	8.00	20,000	1,050	5623211
	CHPF3642D6C*	G*VM961155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5623217
	CHPF3642D6C*	G*VM961005DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5623214
	CHPF3642D6C*	G*VC950905CXB*	35,000	26,600	13.50	11.20	32,400	26,000	32,600	8.00	20,000	1,050	5623198
	CHPF3642D6C*	G*VM960805CXB*	35,000	26,600	13.50	11.20	32,400	26,000	32,600	8.00	20,000	1,050	5623209
	CHPF3642D6C*	A*EH801005C*A*	35,200	26,800	13.50	11.30	24,800	19,800	32,000	8.2	20,000	1,230	6844635
	CHPF3642D6C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3859261
	CHPF3642D6C*+MBVC2000**-1A*		35,200	26,800	14.00	12.00	32,600	26,000	32,000	8.50	20,000	1,150	3859296

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EER - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY				TVA RATINGS ³			HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.		HIGH	HSPF ⁴	LOW		
VSZ13 0421A*	ARPT42D14A*		39,500	28,000	13.00	11.00	36,600	28,800		39,000	8.00	23,600	1,300	5438692
	ARUF42C14A*		39,000	27,600	13.00	11.00	36,200	28,600		38,000	8.00	23,800	1,280	5358282
	ARUF48D14A*		40,000	28,400	13.00	11.00	37,000	29,200		39,000	8.00	24,200	1,300	5438693
	ASPT42D14A*		39,500	28,000	14.00	11.50	36,600	28,800		37,600	8.00	20,400	1,385	5722761
	ASUF49C14A*		38,500	27,200	13.50	11.00	35,600	28,200		37,600	8.00	20,800	1,280	5620396
	ASUF49C14A*+TXV		38,500	27,200	13.80	11.00	35,600	28,200		37,600	8.00	20,800	1,280	5620397
	AVPTC42D14A*		39,500	28,000	14.00	11.50	36,600	28,800		37,600	8.00	20,400	1,255	5924433
	CA*F3642*6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200		40,000	8.00	24,000	1,350	3880681
	CA*F3743*6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200		40,000	8.00	24,000	1,350	4415235
	CA*F4860*6D*	G*VC91155DXA*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	3880735
	CA*F4860*6D*	G*E80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.20	24,000	1,350	5038706
	CA*F4860*6D*	G*E81005C*B*	41,000	29,000	13.50	11.20	38,000	30,000		40,500	8.20	24,000	1,420	5038661
	CA*F4860*6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623222
	CA*F4860*6D*	G*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623227
	CA*F4860*6D*	G*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623229
	CA*F4860*6D*	A*EH801005C*A*	41,000	29,000	13.50	11.20	27,000	21,200		40,500	8.2	24,000	1,420	6844606
	CA*F4860*6D*	A*EH800805C*A*	41,000	29,000	13.50	11.30	27,000	21,200		40,500	8.2	24,000	1,350	6844646
	CHPF3642C6C*+EEP		40,500	28,800	13.00	11.00	37,600	29,600		40,000	8.00	24,000	1,350	3639833
	CHPF3642D6C*+EEP		40,500	28,800	13.00	11.00	37,600	29,600		40,000	8.00	24,000	1,350	3639845
	CHPF4860D6D*	G*VC91155DXA*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	3639853
	CHPF4860D6D*	G*E81005C*B*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.20	24,000	1,420	5038673
	CHPF4860D6D*	G*E80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.20	24,000	1,350	5038619
	CHPF4860D6D*	G*VM960805DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623226
	CHPF4860D6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623223
	CHPF4860D6D*	G*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000		40,500	8.00	24,000	1,350	5623218
	CHPF4860D6D*	G*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623220
	CHPF4860D6D*	G*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623228
	CHPF4860D6D*	G*VM960805CXB*	41,000	29,000	13.50	11.20	38,000	30,000		40,500	8.00	24,000	1,350	5623225
	CHPF4860D6D*	G*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,350	5623230
	CHPF4860D6D*	A*EH800805C*A*	41,000	29,000	13.50	11.30	27,000	21,200		40,500	8.2	24,000	1,350	6844570
	CHPF4860D6D*	A*EH801005C*A*	41,000	29,000	13.50	11.30	27,000	21,200		40,500	8.2	24,000	1,420	6844617
	CHPF4860D6D*+MBVC1600**,-1A*		41,000	29,000	14.00	11.30	38,000	30,000		40,500	8.20	24,000	1,350	3639861
	CSCF3642N6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200		40,000	8.00	24,000	1,275	4767674
	CSCF4860N6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,425	5623224
	CSCF4860N6D*	G*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000		40,500	8.00	24,000	1,450	5623219
	CSCF4860N6D*	G*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000		40,500	8.00	24,000	1,450	5623221

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY			TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴		
VSZ13 0481A*	ARPT48D14A*		46,000	36,000	13.00	11.00	42,500	34,600	45,000	8.20	27,200	5429744
	ARPT60D14A*		46,000	36,000	13.50	11.50	42,500	34,600	44,500	8.20	27,000	5429745
	ARUF48D14A*		45,000	35,200	13.00	11.00	41,500	33,800	44,000	8.00	27,000	5358283
	ARUF60D14A*		45,000	35,200	13.00	11.00	41,500	33,800	44,000	8.00	27,600	5429742
	ASPT48D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	5796519
	ASPT60D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	5722662
	ASUF49C14A*		42,000	33,000	13.00	11.00	39,000	31,600	44,000	8.00	26,000	5620398
	ASUF49C14A*+TXV		42,000	33,000	13.30	11.00	39,000	31,600	44,000	8.00	26,200	5620399
	AVPTC48D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	5924434
	CA*F4860*6D*+EEP		46,000	36,000	13.00	11.00	42,500	34,600	44,000	8.20	27,000	3880739
	CA*F4860*6D*+MBVC2000**--1A*+TXV		46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	3880760
	CA*F4860*6D*+TXV	G*E80805C*B*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	5038674
	CA*F4860*6D*+TXV	G*E81005C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	5038707
	CA*F4860*6D*+TXV	G*VM960805DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	5623243
	CA*F4860*6D*+TXV	G*VM961155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623247
	CA*F4860*6D*+TXV	G*VC950915DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	5623238
	CA*F4860*6D*+TXV	G*VC951155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623239
	CA*F4860*6D*+TXV	A*VC950915DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	5623237
	CA*F4860*6D*+TXV	G*VM960805CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623241
	CA*F4860*6D*+TXV	G*VC950905DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623234
	CA*F4860*6D*+TXV	G*VC950905CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623231
	CA*F4860*6D*+TXV	G*VM961005DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623245
	CA*F4860*6D*+TXV	A*EH800805C*A*	45,500	35,600	13.50	11.30	33,000	26,800	44,000	8.2	27,000	6844618
	CA*F4860*6D*+TXV	A*EH801005C*A*	45,000	35,200	13.50	11.30	32,600	26,400	44,000	8.2	27,000	6844647
	CAPT4961*4A*+EEP		45,000	35,200	13.00	11.00	41,500	33,800	43,000	8.00	27,200	5611349
	CAPT4961*4A*+MBVC2000**--1A*		45,500	35,600	14.00	12.00	42,000	34,200	41,500	8.50	26,200	5611350
	CHPF4860D6D*+EEP		46,000	36,000	13.00	11.30	42,500	34,600	44,000	8.20	27,000	3639856
	CHPF4860D6D*+MBVC2000**--1A*+TXV		46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	3639862
	CHPF4860D6D*+TXV	G*VC91155DXA*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	3639871
	CHPF4860D6D*+TXV	G*E81005C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	5038620
	CHPF4860D6D*+TXV	G*E80805C*B*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	5038708
	CHPF4860D6D*+TXV	G*VM960805CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623242
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623240
	CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623248
	CHPF4860D6D*+TXV	G*VC950905CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	5623232

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY			TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴		
VSZ13 0481A*	CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	1,600	5623246
	CHPF4860D6D*+TXV	G*VC950905DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	1,600	5623235
	CHPF4860D6D*+TXV	G*VM960805DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	1,600	5623244
	CHPF4860D6D*+TXV	A*EH801005C*A*	45,000	35,200	13.50	11.30	32,600	26,400	44,000	8.2	1,570	6844572
	CHPF4860D6D*+TXV	A*EH800805C*A*	45,500	35,600	13.50	11.30	33,000	26,800	44,000	8.2	1,650	6844649
	CSCF4860N6D*+EEP		46,000	36,000	13.00	11.30	42,500	34,600	44,000	8.20	1,600	4767680
	CSCF4860N6D*+TXV	G*VC950905CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	1,575	5623233
	CSCF4860N6D*+TXV	G*VC950905DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	1,575	5623236
	ARPT60D14A*		56,000	42,500	13.00	11.00	52,000	41,500	59,000	8.00	1,850	5429749
	ARUF60D14A*+TXV		55,500	42,500	13.00	10.80	51,500	41,000	59,000	8.20	1,800	5439803
VSZ13 0601A*	ASPT60D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	1,600	5722664
	ASUF59D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	1,580	5600188
	AVPTC60D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	1,805	5924421
	CA*F4860*6D*+EEP		57,000	43,500	13.00	11.10	52,500	42,000	58,000	8.20	1,800	3880740
	CA*F4860*6D*+MBVC2000**-1A*+TXV		57,000	43,500	13.50	11.30	52,500	42,000	58,000	8.50	1,800	3880761
	CA*F4860*6D*+TXV	G*E81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	1,900	5038621
	CA*F4860*6D*+TXV	G*E80805C*B*	56,500	43,000	13.50	11.20	52,500	42,000	58,000	8.20	1,650	5038675
	CA*F4860*6D*+TXV	A*EH801005C*A*	57,000	43,500	13.50	11.20	40,000	32,200	58,000	8.2	1,900	6844574
	CA*F4860*6D*+TXV	A*EH800805C*A*	56,500	43,000	13.50	11.20	40,000	32,000	58,000	8.2	1,650	6844620
	CA*F4961*6D*+EEP		57,500	44,000	13.00	11.00	53,000	42,500	58,000	8.20	1,800	4431868
	CHPF4860D6D*+EEP		57,000	43,500	13.00	11.10	52,500	42,000	58,000	8.20	1,800	3639857
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	43,500	13.50	11.30	52,500	42,000	58,000	8.50	1,800	3639863
	CHPF4860D6D*+TXV	G*E81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	1,810	5038664
	CHPF4860D6D*+TXV	G*E80805C*B*	56,500	43,000	13.50	11.20	52,500	42,000	58,000	8.20	1,600	5038693
	CHPF4860D6D*+TXV	A*EH801005C*A*	57,000	43,500	13.50	11.20	40,000	32,200	58,000	8.2	1,810	6844609
	CHPF4860D6D*+TXV	A*EH800805C*A*	56,500	43,000	13.50	11.20	40,000	32,000	58,000	8.2	1,600	6844636
	CSCF4860N6D*+EEP		57,000	43,500	13.00	11.00	52,500	42,000	58,000	8.20	1,800	4767685
	CSCF4860N6D*+TXV	G*VC950905CXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	1,675	5623249
	CSCF4860N6D*+TXV	G*VC950905DXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	1,675	5623250

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

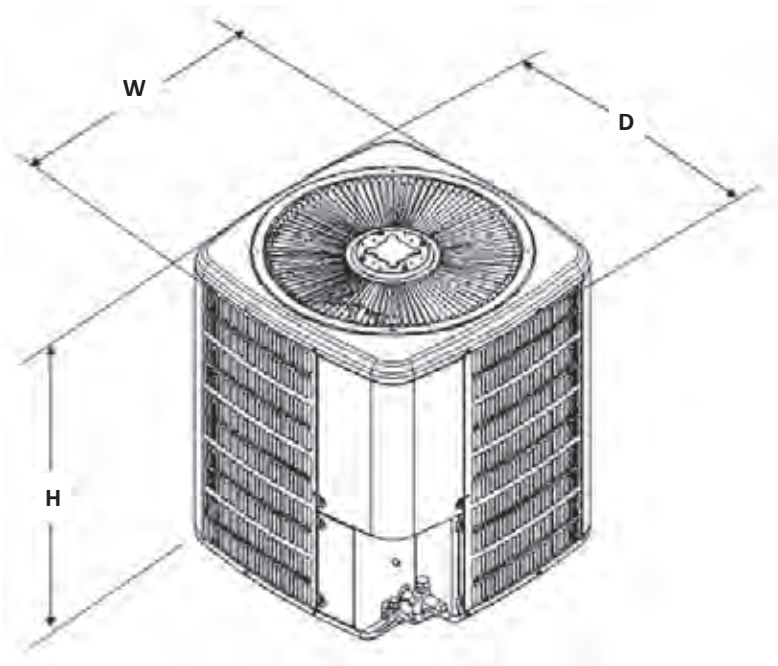

MODEL	DIMENSIONS		
	W"	D"	H"
VSZ130181A*	26	26	32¼
VSZ130241C*	26	26	32¼
VSZ130301A*	26	26	32¼
VSZ130361B*	29	29	32¼
VSZ130421A*	29	29	38¼
VSZ130481A*	29	29	34¼
VSZ130601A*	35½	35½	34¼

WIRING DIAGRAM

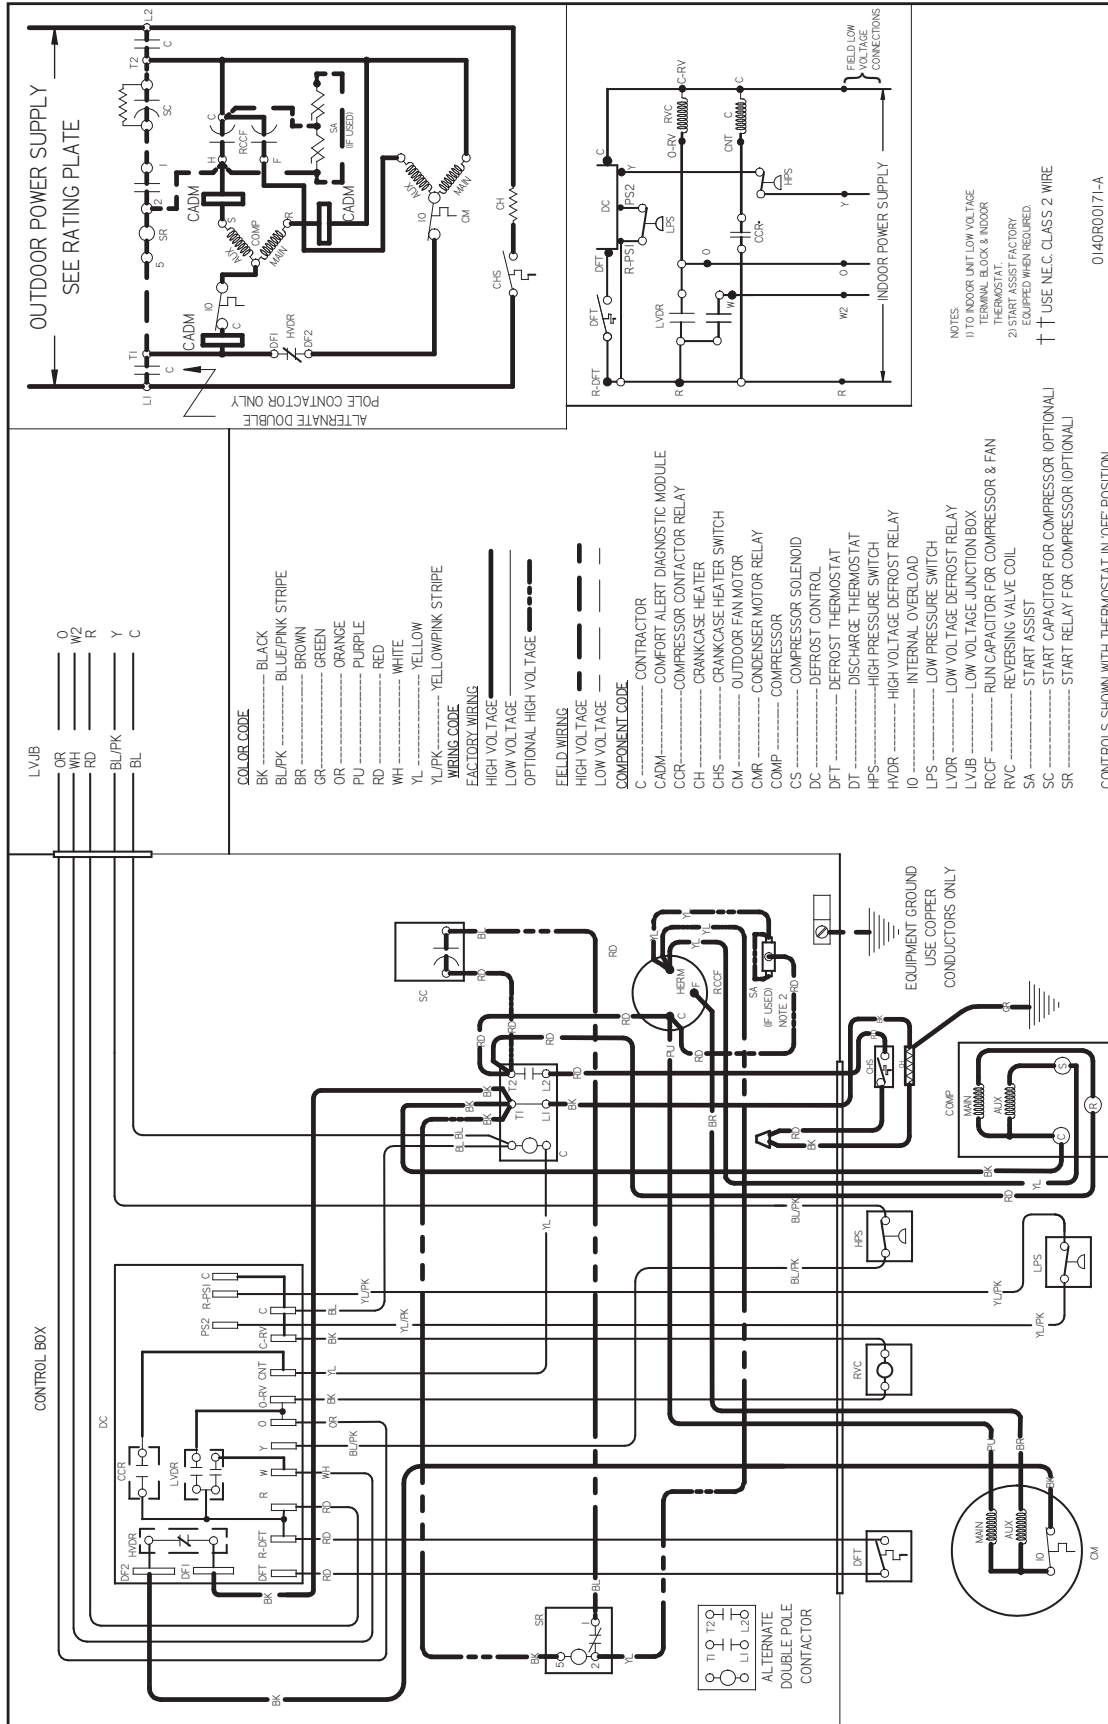

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING
High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

ACCESSORIES

MODEL #	DESCRIPTION	VSZ13 018	VSZ13 024	VSZ13 030	VSZ13 036	VSZ13 042	VSZ13 048	VSZ13 060
0130R00000S	Low-pressure Switch Kit	X	X	X	X	X	X	X
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01	Low-Ambient Kit	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X						
TX2N4A ²	TXV Kit	X	X					
TX3N4 ²	TXV Kit			X	X			
TX5N4 ²	TXV Kit					X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

NOTES

NOTES