

### GENERAL

Pedestal steel bottle filler with textured power coat finish and E-Coat immersion for year-round beauty with minimum maintenance. The E-Coat immersion process coats the outside and inside of the unit for the ultimate in corrosion protection.

#### Configuration options:

- Single bottle filler in upper location with drinking fountain basins at middle & lower positions (Model LK4430BF1U)
- Single bottle filler in middle location with drinking fountain basins at upper & lower positions (Model LK4430BF1M)
- Single bottle filler in lower location with drinking fountain basins at upper & middle positions (Model LK4430BF1L)
- Bottle fillers in upper & lower locations with drinking fountain basin at middle position (Model LK4430BF2UL)
- Bottle fillers in upper & middle locations with drinking fountain basin at lower position (Model LK4430BF2UM)
- Bottle fillers in middle & lower locations with drinking fountain basin at upper position (Model LK4430BF2ML)
- Triple bottle fillers (Model LK4430BF3)

### NO LEAD DESIGN

This fountain is certified by WQA to lead-free compliance including **NSF/ANSI 61 and 372**.

This model complies with the lead-free definition in the Safe Drinking Water Act of 1986 and Lead Contamination Act of 1988.

### CONSTRUCTION

**Bottle Filler:** Heavy-duty steel construction with rounded design. Laminar flow minimizes splash and allows easy maintenance. Quick fill rate at 1 gallon per minute.

**Pushbutton Actuation Mechanism:** Self-closing, vandal-resistant pushbutton does not require grasping or twisting.


**Inlet Strainer:** Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

**Access Panel:** Manufactured of heavy-gauge steel with vandal-resistant screws. Provides access for easy hook-up of all plumbing connections.



This model is ADA compliant when properly installed.

Designed to be easily accessible to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. Model meets state and federal requirements as defined by the Americans with Disabilities Act.

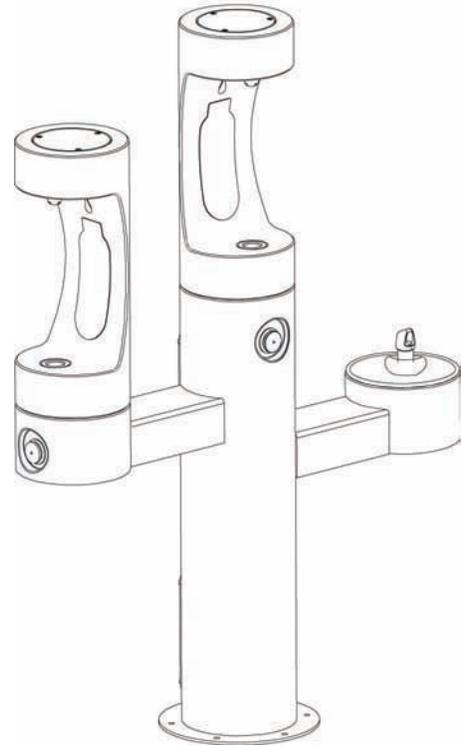

Model LK4430BF2UM Shown

### SUGGESTED SPECIFICATIONS

Unit shall be of tubular steel construction. Bottle Filler unit shall include laminar flow and front pushbutton activation. Stainless steel contoured basin with vandal-resistant one-piece bubbler, if applicable. Shall comply with ADA guidelines and be certified to lead-free compliance including NSF/ANSI 61, CA 1953 and the Safe Drinking Water Act.

**Shipping Weight:** 280, 330, or 380 lbs.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Outdoor Bi-Level Tubular  
Bottle Filling Station  
Model LK4430BF2  
(2 Bottle Fillers & 1 Fountain Basin)



**ROUGH-IN DIMENSIONS**


**MOUNTING INSTRUCTIONS and  
PLUMBING CONNECTIONS**

Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with six 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.

Water supply 3/8" O.D. unplated copper tube. Waste 1-1/2" IPS.


Trap and service stop not included.

**Operating Pressures:** Supply water: 20 - 105 psi maximum.

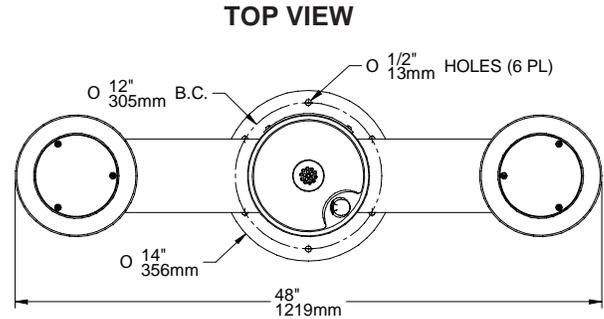

**ACTUAL PRODUCT CONFIGURATION WILL VARY BASED ON MODEL ORDERED.**

**2UM = Upper/Middle Position; 2UL= Upper/Lower Position; 2ML = Middle/Lower Position  
MODEL LK4430BF2ML SHOWN BELOW**

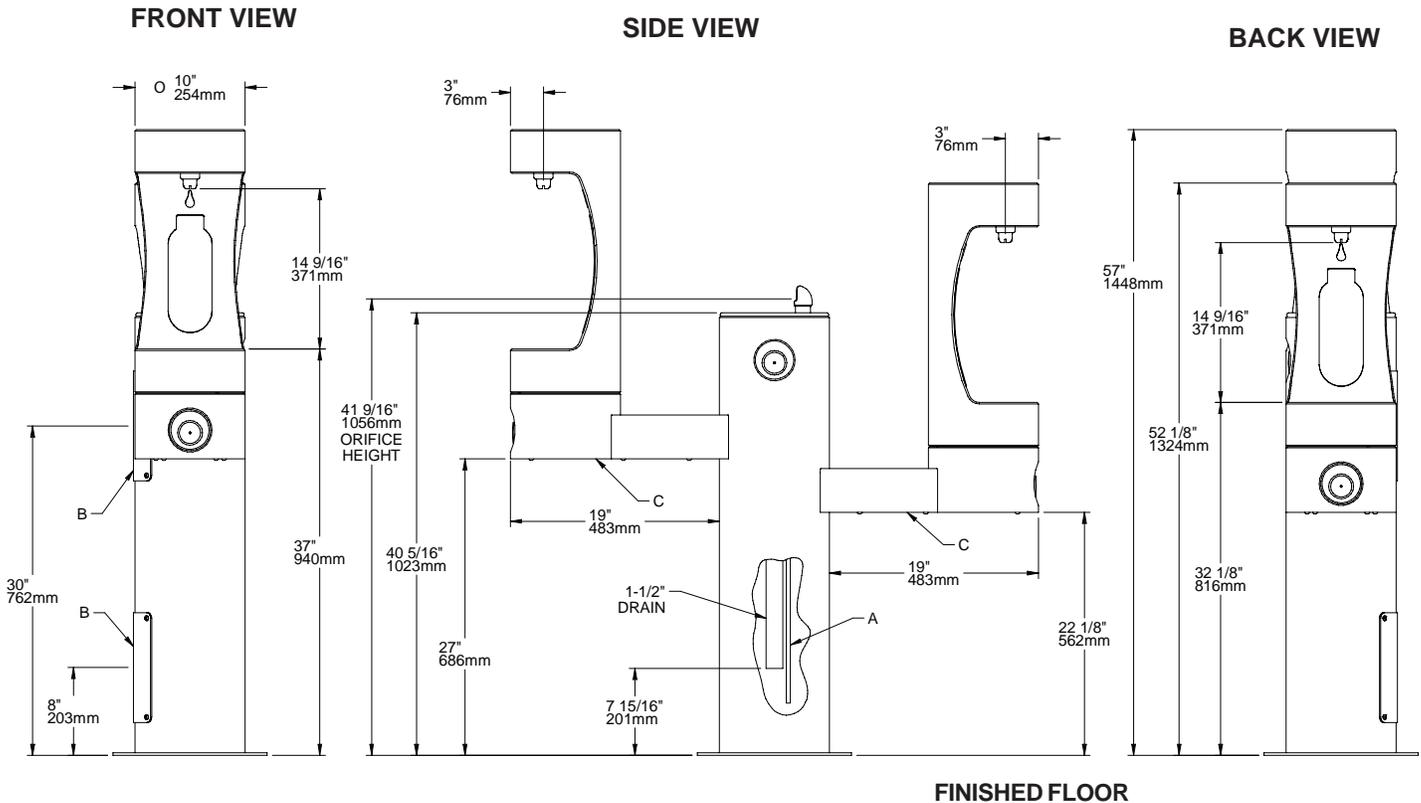

**FINISHED FLOOR**

**LEGEND**

- A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS**
- B = ACCESS PANEL ( 8" X 10" )**
- C = REMOVABLE BOTTOM COVER**

Outdoor Tri-Level Tubular  
Bottle Filling Station  
Model LK4430BF3  
(3 Bottle Fillers)



**ROUGH-IN DIMENSIONS**

**MOUNTING INSTRUCTIONS and  
PLUMBING CONNECTIONS**


Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with six 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.

Water supply 3/8" O.D. unplated copper tube. Waste 1-1/2" IPS.

Trap and service stop not included.

**Operating Pressures:** Supply water: 20 - 105 psi maximum.


**TOP VIEW**

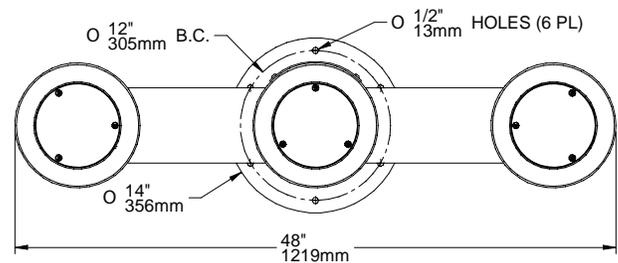

**FRONT VIEW**

**SIDE VIEW**

**BACK VIEW**

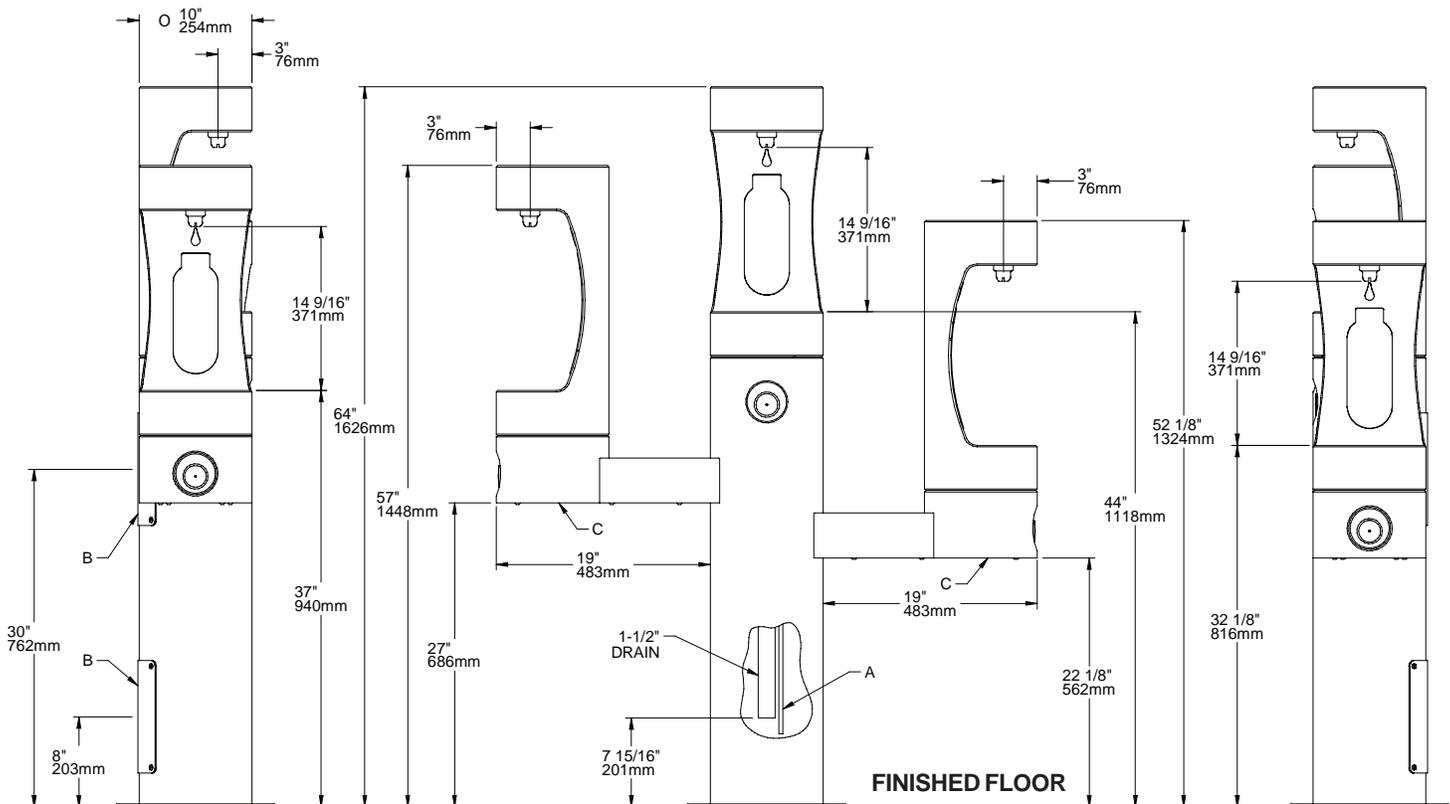

**LEGEND**

**A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS**

**B = ACCESS PANEL ( 8" X 10" )**

**C = REMOVABLE BOTTOM COVER**