

Octave® Top-/Under-Mount Kitchen Sink K-3842-1

Features

- 36-inch minimum base cabinet width.
- Double-equal bowls.
- 9" (229 mm) depth provides generous workspace.
- Single faucet hole.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes bottom sink rack and sponge caddy.

Material

Premium 18-gauge stainless steel.

Installation

- Dual-mount sink can be installed as top-mount or undermount.
- Includes top-mount installation hardware.
- Undermount installation kit not included.

Recommended Products/Accessories

K-8801 Sink Strainer K-8799 Sink Strainer K-23726 Drain treatment K-23729 Stainless steel cleaner

Optional Products/Accessories

K-6453 Right-Bowl Sink Rack K-11352 Disposal Flange with Stopper

Included Components

Product consists of:
K-6139 Sponge Caddy
K-6483 Sink Rack
1177160 Hardware Kit, Self-Rimming



Codes/Standards

ASME A112.19.3/CSA B45.4

Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.






Octave®

Top-/Under-Mount Kitchen Sink

K-3842-1

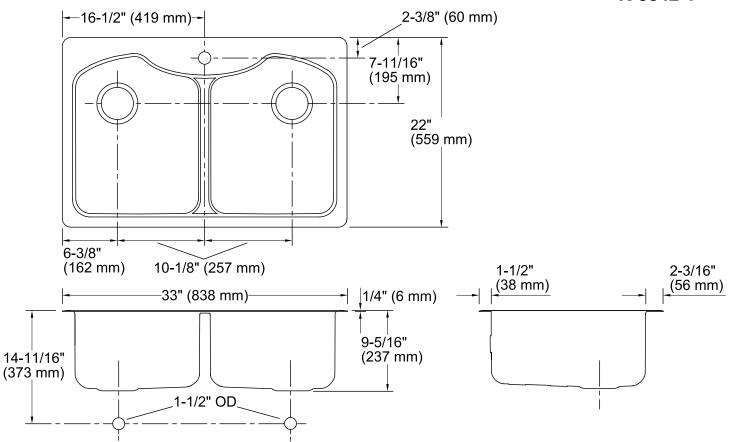

Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal

Installation: Top-mount, Under-mount

Cutout: Top-mount, 32-1/2" x 21-1/2" (826 mm x

546 mm) with 1/2" (13 mm) radius corners

Min. base cabinet 36" (914 mm)

width:

Bowl area (Left): Length: 14-3/8" (365 mm)

Width: 18-5/16" (465 mm) Water depth: 9" (229 mm)

Length: 14-3/8" (365 mm)

Bowl area (Right): Width: 18-5/16" (465 mm)

Water depth: 9" (229 mm)

Number of deck holes: 1

Faucet hole(s): 1-7/16" (37 mm) Drain hole: 3-5/8" (92 mm)

Notes

Install this product according to the installation instructions.

