

Diagrams (36")

1-7/16"

#### Unit Dimensions






Allow door swing clearance at locations next to a wall.

The refrigerator door must open to a minimum of 90° to allow the crispers to open and the shelves to be removed.


# Cabinet Opening Dimensions



Inset cabinet Depth <b>D</b>	Frameless cabinet Depth I
24" + panel thickness	24"

Factory available stainless steel panels are designed for an inset installation only and require a cabinet / gable depth of 24 - 3/4".

# Panel Dimensions

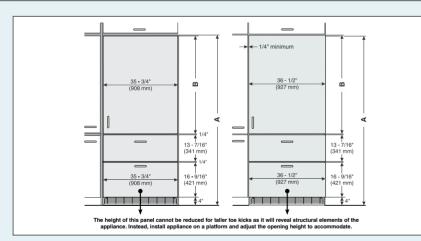

79-11/16" 2024 mm

#### Inset Installation Style

Minimum panel thickness is **5/8"** (16 mm). Maximum panel thickness is **1-1/2"** (38 mm).

Maximum weight of the refrigerator panel is  ${\bf 60}$  lbs (27 kg).

Maximum weight of each freezer panel is **26.5 lbs** (12 kg).

Cabinet opening A	Refrigerator door panel B
80"	45-1/4" (1150 mm)
84"	49-1/4" (1251 mm)"

## Frameless Installation Style

Minimum panel thickness is 5/8" (16 mm).

Maximum panel thickness is 1-1/2" (38 mm).

Maximum weight of the refrigerator panel is

60 lbs (27 kg).

Height can be increased by 1-1/2" (40 mm) by turning the

levelling feet at the front and the height adjustable roller

Maximum weight of each freezer panel is **26.5 lbs** (12 kg).

Cabinet opening A	Refrigerator door panel B	
80"	45-3/4" (1162 mm)	
84"	49-3/4" (1264 mm)"	

## Ventilation Requirements



The appliance do not require ventilation considerations in the cabinetry. The required airflow is directed through the toe kick base. It is important to use the provided cover grille for the ventilation opening. This opening must not be covered.





Quality, Design and Innovation

crescent ice.



## **Fully Integrated/Seamless**

Energy consumption		
in 365 days kWh		
Estimated Yearly Energy Cost in US \$		
Capacity		
Total capacity cu.ft. (I)		
Refrigerator comp. cu.ft. (I)		
NoFrost Freezer comp. cu.ft. (I)		
Shipping weight lbs. (kg)		
Climate rating		
Sound rating dB(A)		
Ice cube output lbs. (kg) / 24h		
Ice cube stock lbs. (kg)		
Door hinges		
Product dimensions		
in inches (cm) H/W/D		
Cut out dimensions		
in inches (cm) H /W/D		
Energy supply		
Voltage V/Hz		

НС	2060	
Prem	niumPlus	

562

67\*

19.4 (552) 13.4 (382) 6 (170) 394.6 (179) SN-T 44\*\* 3.1 (1.4) 7.9 (3.6) right

115/60



79 13/16" / 35 7/8" / 24 1/16" (202.7 / 91 / 61)

80" - 84" / 36 1/6" / 24 5/8" (203.2 - 213.4 / 91.5 / 62.5)

















	Glass Line

GlassLine: The elegant yet tough GlassLine shelves are scratch resistant and easy to clean as well as dishwasher safe. The space-saving shelves are designed for organization and are completely adjustable to suit your needs and the contents of the refrigerator; additionally the lighting shines through for a brighter interior.

# **Advantages**



German Engineering: Our superior products offer premium quality, cutting edge design and innovative features that fit with your busy lifestyle. Plus, exclusive components and materials along with the latest production processes ensure energy efficiency and performance for years to come.



SuperQuiet: Noise is kept to a minimum with virtually silent, speed controlled compressors and a low nose cooling circuit; while also ensuring exact performance, energy efficiency and SuperQuiet operation.



**LED:** Distinctive LED light columns are integrated into both sides of the compartment liner. Inside the columns are numerous cool LED lights that ensure uniform lighting throughout the interior.



SuperCool/SuperFrost: Simply quick chill and or freeze fresh groceries to preserve optimum freshness and seal in flavors, textures as well as maintain essential vitamins and minerals.



**DuoCooling:** The dual refrigeration system creates

freezer which lengthens the shelf life of food items

optimal conditions in both the refrigerator and

for a healthier lifestyle. This technology also

preserves the flavor and texture of foods since

there is no transfer of unwanted air, moisture or food aroma between the two compartments.


**Energy Star:** Liebherr refrigerators help to produce less energy waste and greenhouse gas emissions with the aim to have the least damaging effect on the environment and offering solutions that help consumers conserve energy.



**SoftSystem:** Unique to Liebherr is our patented SoftSystem, often used in high-end cabinetry, ensures that the door closes gently, even when fully loaded. Plus the door opening angle can be reduced to 90 degrees allowing for more design options within kitchen décor.



Gallon Storage on door: A Liebherr is designed to fit more cubic feet of your everyday life. The durable yet elegant GlassLine door racks easily accommodate a large supply of milk or juice on



<sup>\*\*</sup> Noise level – sound power re 1pW – according to EN 60704-3

