


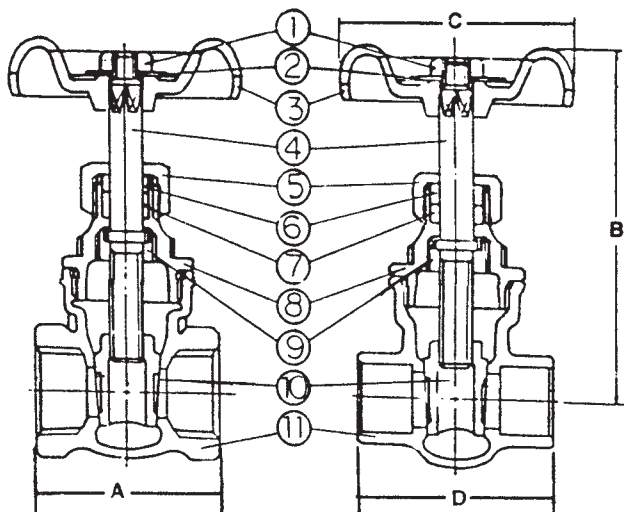

667 Threaded

668 Solder

DIMENSIONS (INCHES)					Approx. Weight	Approx. Weight	C _v
SIZE	A	B	C	D	667	668	
1/4	1.63	2.84	2.13	-	0.60	-	5.6
3/8	1.63	2.84	2.13	1.63	0.60	0.56	10.7
1/2	1.69	2.91	2.13	1.78	0.63	0.59	17.6
3/4	1.84	3.31	2.13	2.31	0.88	0.81	32
1	2.19	3.94	2.41	2.84	1.25	1.19	54
1 1/4	2.42	4.34	2.94	3.00	1.75	1.65	97
1 1/2	2.44	4.94	2.94	3.22	2.12	2.00	135
2	2.84	6.03	3.19	3.97	3.20	3.10	230
2 1/2	3.50	7.44	3.94	4.66	6.25	6.00	337
3	3.97	8.63	5.13	5.28	9.62	8.75	536
4	4.56	10.00	6.78	-	15.50	-	960

RATING

- 200 PSI NON-SHOCK

FEATURES

- FORGED BRASS BODY
- THREADED OR SOLDER ENDS
- THREADED BONNET
- INTEGRAL SEAT
- ADJUSTABLE PACKING NUT
- NON-RISING STEM
- FORGED SOLID WEDGE DISC
- IRON HANDWHEEL
- 100% FACTORY TESTED
- INTERNATIONAL

MATERIAL SPECIFICATION			
1	Handwheel Nut	Brass	ASTM B16
2	Nameplate	Aluminum Sheet	Commercial
3	Handwheel	Cast Iron	ASTM A48, Class 35
4	Stem	Brass	ASTM B124, C37700
5	Packing Nut	Forged Brass	ASTM B283, C37700
6	Gland	Brass Rod	ASTM B124, C37700
7	Packing Ring	Non-Asbestos Synthetic Fibers	
8	Bonnet	Forged Brass	ASTM B283, C37700
9	Locknut	Brass Rod	ASTM B16, C36000
10	Wedge	Forged Brass	ASTM B283, C37700
11	Body	Forged Brass	ASTM B283, C37700

Rev. 3

The information presented on this sheet is correct at the time of publication. Hammond Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.hammondvalve.com