

### Hartland® der-mount Kitchen Sink

Under-mount Kitchen Sink K-5818-5U

#### **Features**

- 36-inch minimum base cabinet width.
- KOHLER cast iron.
- Acid-resistant enamel finish.
- Double (equal) bowl.
- Under-mount.
- Three oversized faucet holes with one oversized accessory hole to the right and one oversized accessory hole to the left.
- 33" (838 mm) x 22" (559 mm)

#### **Recommended Accessories**

K- 9000 P-Trap

#### **Optional Accessories**

K- 6016L Sink Rack

K- 6016R Sink Rack

K- 6545 Sponge Caddy

K- 6603L Sink Basket

K- 6603R Sink Basket

K-8801 Sink Strainer

#### Components

Product includes:

1054375 Under-mount Sink Kit, 23"



#### Codes/Standards

ASME A112.19.1/CSA B45.2

## **KOHLER® Enameled Cast Iron Kitchen Sink - Lifetime Limited Warranty**

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	20	Suede
	KA	Black 'n Tan
	FP	Caviar
	7	Black Black™






### **KOHLER**®

### **Hartland®**

# Under-mount Kitchen Sink K-5818-5U

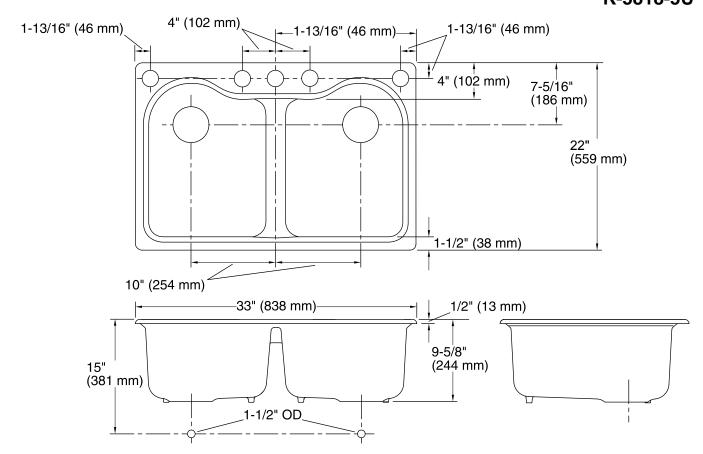

#### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Double equal Installation: Under-mount

Bowl area (Left) Length: 14-1/8" (359 mm)

Width: 16-1/4" (413 mm) Bowl depth: 9" (229 mm) Length: 14-1/8" (359 mm)

Bowl area (Right) Length: 14-1/8" (359 mm)

Width: 16-1/4" (413 mm) Bowl depth: 9" (229 mm)

Number of deck holes: 5

Faucet hole(s): 2-3/8" (60 mm)
Drain hole: 3-7/8" (98 mm)

Template: Under-mount, 1125670-7, required,

included

#### **Notes**

Install this product according to the installation guide.

NOTICE: The countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by the Kohler Co. (Call 1-800-4-KOHLER.) Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

