

## AquaSense<sup>®</sup> TAG \_\_\_\_\_

# Z6930-XL

AquaSense Battery Powered Faucet

<image>

### Flow Control Options

- □ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- □ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- □ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated
- $\square$  -N  $\,$  0.5 gpm/ 1.9 Lpm Vandal-Resistant Laminar Flow  $\,$
- Power Supply Choices (Sold Separately)

□ -ACA 6 VDC Plug-In Power Converter □ -HW6 Hardwired Power Converter

### Optional Power Supply Accessories

□ -CWB Connector Wire for Hardwire Install □ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter seperately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

ZURN INDUSTRIES, LLC. 
COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE 
SANFORD NC 27330
Phone: 1-800-997-3876 
Fax: 919-775-3541
www.zum.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive 
Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

Flow Rate

1.5 gpm Vandal Resistant Aerator

- Occupant Detection Infrared convergence-type proximity sensor Thirty Second Time out feature
- Spout module Chrome Plated Cast Brass
- Also Includes
  - In-line filter
  - 4 "AA" batteries Inlet for a 1/2"[13] ball riser

### Accessories

- □ -ADM Above Deck Mixer □ -ADM-2 Above Deck Mixer w/8" Cover Plate
- **-CP4** Cover Plate 4"[102] Centers
- Cover Plate 8"[203] Centers
- □ -DSA Drug Screening Applications (Hardwired Applications)
- □ -H4 Wrist Blade Handle for ADM
- □ -MT Mixing Tee
- □ -MV Temperature Mixing Valve
- □ -SH Supply Hoses for Mixing Valve
- □ -SSH Single Stainless Supply Hose (-XL)
- **-TMV** Thermostatic Mixing Valve for Multiple Faucets
- □ -TMV-1 Thermostatic Mixing Valve for Single Faucets
- □ -\_\_\_\_ Other


Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.




# **TYPICAL Z6930-ACA**

**AquaSense Plug-In Powered Faucet** 

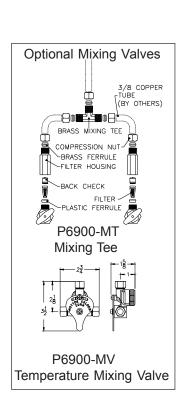

-3 [76]



Å

[118]

45

4ğ [111]

# **TYPICAL Z6930-CWB**

#### **AquaSense Hardwire**

#### **Powered Faucet**

Optional:

\* Optional -MJ mini junction box for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER **CONVERTER OR ZURN P6000-**ACA PLUG-IN POWER CON-VERTER TO ENSURE PROPER **OPERATION. USING A POWER CONVERTER OTHER THAN** ZURN MAY RESULT IN OPERA-TION MALFUNCTION OR UNIT FAILURE.

