



SUBMITTAL INFORMATION

Service Insulator Ball Corporation Stops - (SI-FB1100-x-AWT-Q-NL style)



MALE IRON PIPE THREAD INLET BY SERVICE INSULATOR BY QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

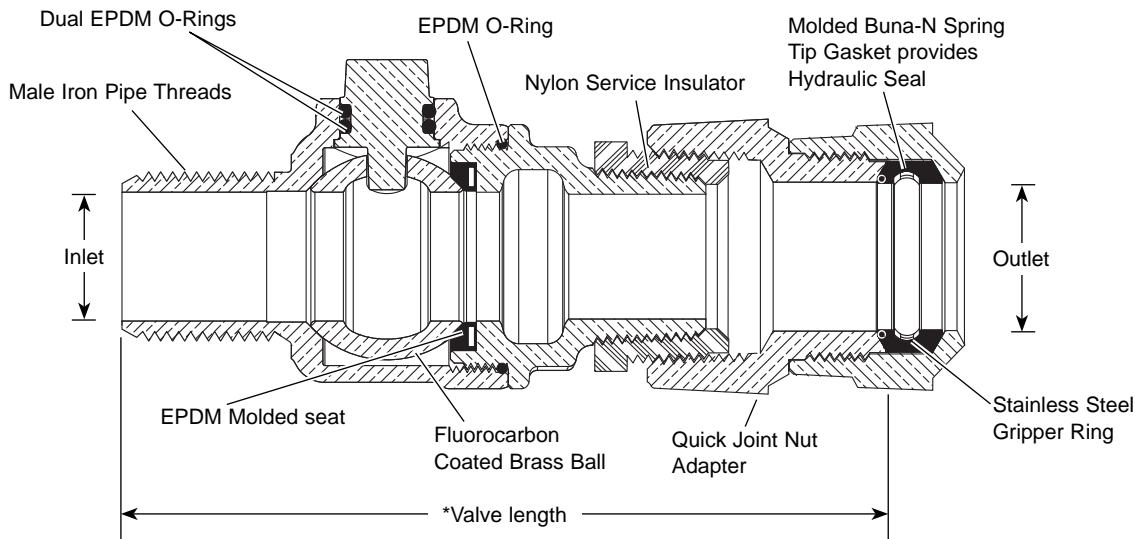

VALVE SIZE	ASSEMBLY INLET SIZE	ASSEMBLY OUTLET SIZE	VALVE LENGTH	APPROX. WT. LBS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	3/4"	5-11/16"	2.3	SI-FB1100-3-AWT-Q-NL	
1"	1"	1"	5-29/32"	3.8	SI-FB1100-4-AWT-Q-NL	
2"	2"	2"	9-9/16"	9.3	SI-FB1100-7-AWT-Q-NL	

*Indicates fully assembled valve length.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Corporation Stop body assembly threads are secured with adhesive to prevent unintentional disassembly
- Solid one piece tee-head and stem with EPDM O-rings in stem
- Molded EPDM seat supports the ball
- Fluorocarbon-coated brass ball
- Nylon service insulator provides protection against service line electrolysis
- 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

12/10/15

Submitted By: