



SUBMITTAL INFORMATION

Grip Joint Coupling - (C44-xx-G style)



GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS

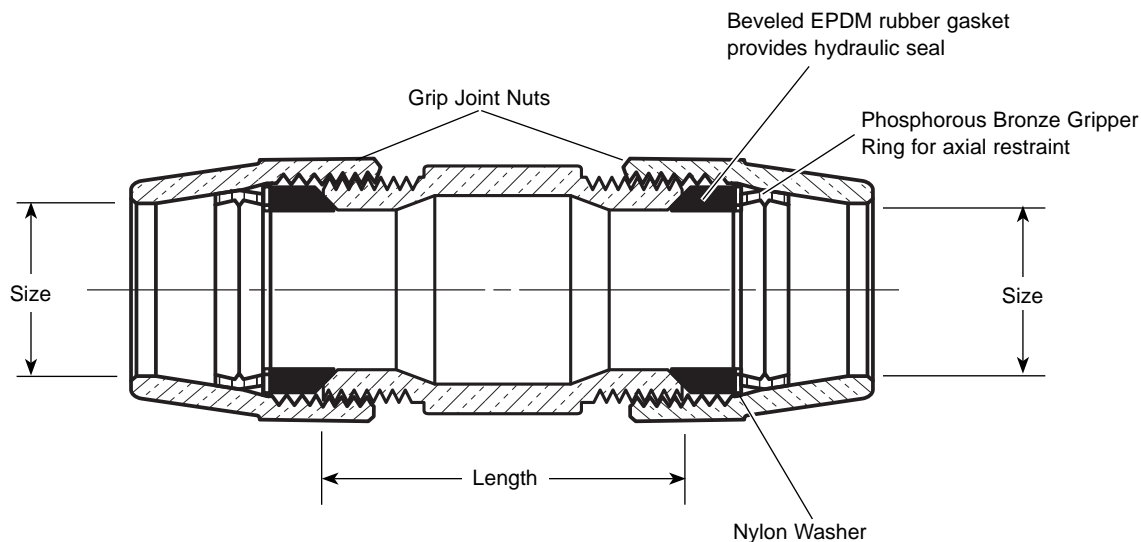

DESCRIPTION		LENGTH	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
G.J. FOR CTS	G.J. FOR CTS				
1/2"	3/4"	2"	.8	▼ C44-13-G	
1/2"	1"	2-5/16"	.9	▼ C44-14-G	
5/8"	3/4"	2-1/16"	1.0	▼ C44-23-G	
3/4"	3/4"	2"	.9	▼ C44-33-G	
3/4"	1"	2-1/8"	1.0	▼ C44-34-G	
1"	1"	2-1/8"	1.1	▼ C44-44-G	
1"	1-1/4"	1-5/16"	1.5	▼▼ C44-45-G	
1"	1-1/2"	2-5/8"	2.1	▼▼ C44-46-G	
1-1/4"	1-1/4"	2-1/2"	1.5	▼▼ C44-55-G	
1-1/4"	1-1/2"	3-1/4"	2.8	▼▼ C44-56-G	
1-1/2"	1-1/2"	3-5/8"	3.0	▼▼ C44-66-G	
1-1/2"	2"	2-1/2"	3.5	▼▼ C44-67-G	
2"	2"	3-1/2"	4.5	▼▼ C44-77-G	



▼ UL Classified to ANSI/NSF Standard 61.

▼▼ Add "-K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61.

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

Note: 1/2" and 5/8" Connections are Pack Joint Style

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Body design provides larger, more rugged wrench flats for proper installation.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

03/18/05

Submitted By: